



Welcome to the World of Standards



INTRODUCTION TO AND DRIVERS FOR ETSI NGP ISG

Andy Sutton (Principal Network Architect, EE) on behalf of 5GIC (ICS, University of Surrey)
21st January 2016

- **Background**
- **Rationale**
- **Mobile network architecture**
- **LTE User plane protocol architecture**
- **Protocol stack placement in mobile networks**
- **Usage scenarios of IMT for 2020 and beyond**
- **Radio frequency spectrum**
- **Summary of key topics to consider**



- Early fixed and wireless data access networks offered low speed and unreliable transmission and therefore higher layer protocols had to address many issues
- Modern fixed and mobile networks offer high data transmission speeds, low latency and reliable transmission...
- Spectrum is a finite resource which must be utilised in the most efficient manner possible - application bits per second per Hertz (Ab/sec/Hz)
- 5G will provide truly converged fixed and mobile networks (not just service/product layer) and therefore offers an opportunity for an revised and optimised protocol architecture




Rationale (1)

- The TCP/IP protocol suite has undoubtedly enabled the evolution of connected computing and many other developments since its invention during the 1970's
- NGP ISG aims to gather opinions on how we can build on this momentum by evolving communications and networking protocols to provide the scale, security, mobility and ease of deployment required for the connected society of the 21st century
- The industry has reached a point where forward leaps in the technology of the local access networks (such as LTE-A, G.FAST, DOCSIS 3.1 and 5G) will not deliver their full potential unless, in parallel, the entire infoComms protocol stacks evolve more holistically



Rationale (2)

- The purpose of this ISG is to review the future landscape of Internet Protocols and network architectures to identify and document future requirements and trigger coordinated follow up activities.
- The driving vision is a considerably more efficient Internet that is far more attentive to user demand and responsiveness - whether “the user” is human or millions of things (MTC/IoT)
- There are 5 main domains to consider and not all need to evolve at the same time...

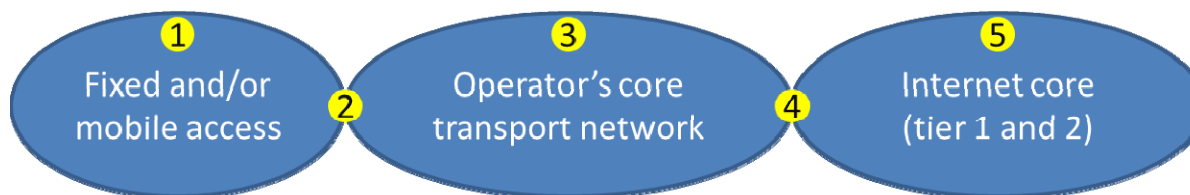


Rationale (3)

- The prize is to remove the anchor drag of historic sub-optimised IP protocol stacks and allow all the next generation networks to inter-work in a way that accelerates a post-2020 connected world unencumbered by past developments
- NGP ISG is foreseen as having a transitional nature i.e. a vehicle for the 5G community (and others of interest) to first gather their thoughts together and prepare the case for the Internet community's engagement in a complementary and synchronised modernisation effort
- Therefore NGP ISG aims to stimulate closer cooperation over standardisation efforts for generational changes in communications and networking technology.



4G LTE reference diagram

- 4G LTE networks are often deployed with IPsec to ensure authentication of network connected equipment and encrypt user traffic and signalling
- Mobility is managed through a second tunnel between the base station and Packet data-network Gateway

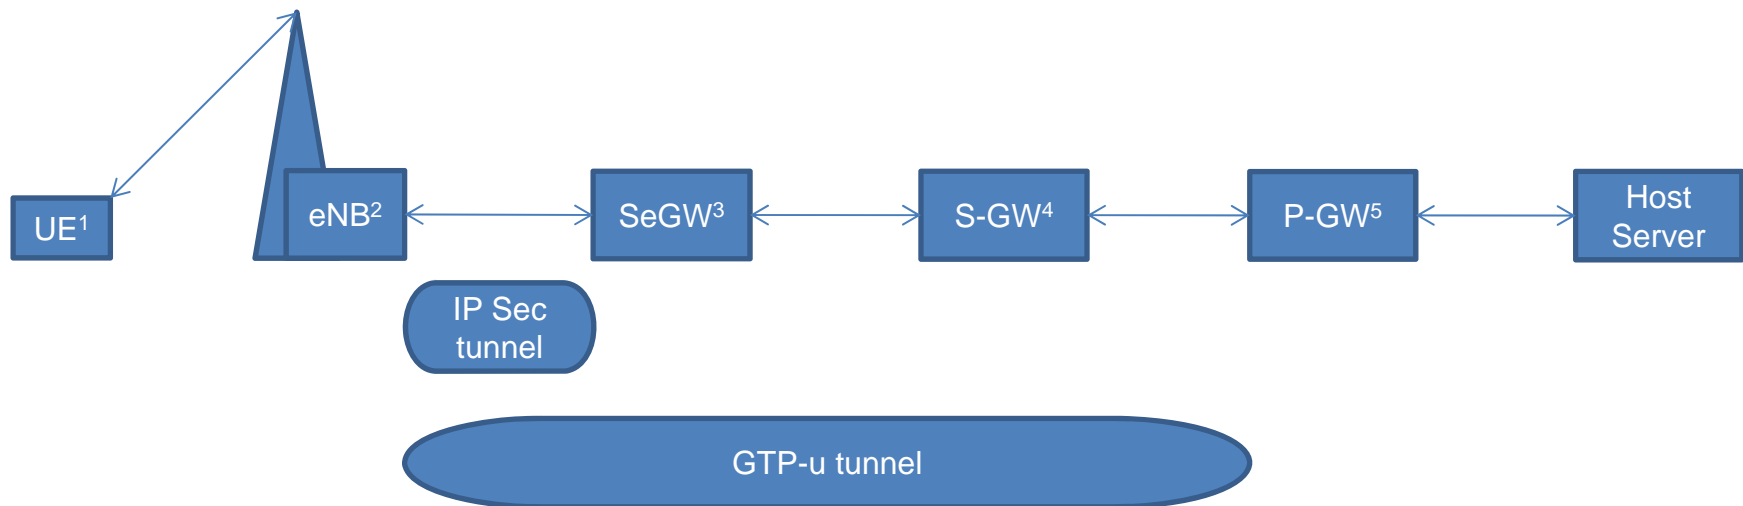


1: User Equipment - 2: evolved NodeB (LTE radio base-station) - 3: IP Security gateway - 4: Serving Gateway - 5: Packet data-network Gateway


Example of real mobile network architecture




EE UK network (including MBNL shared access)

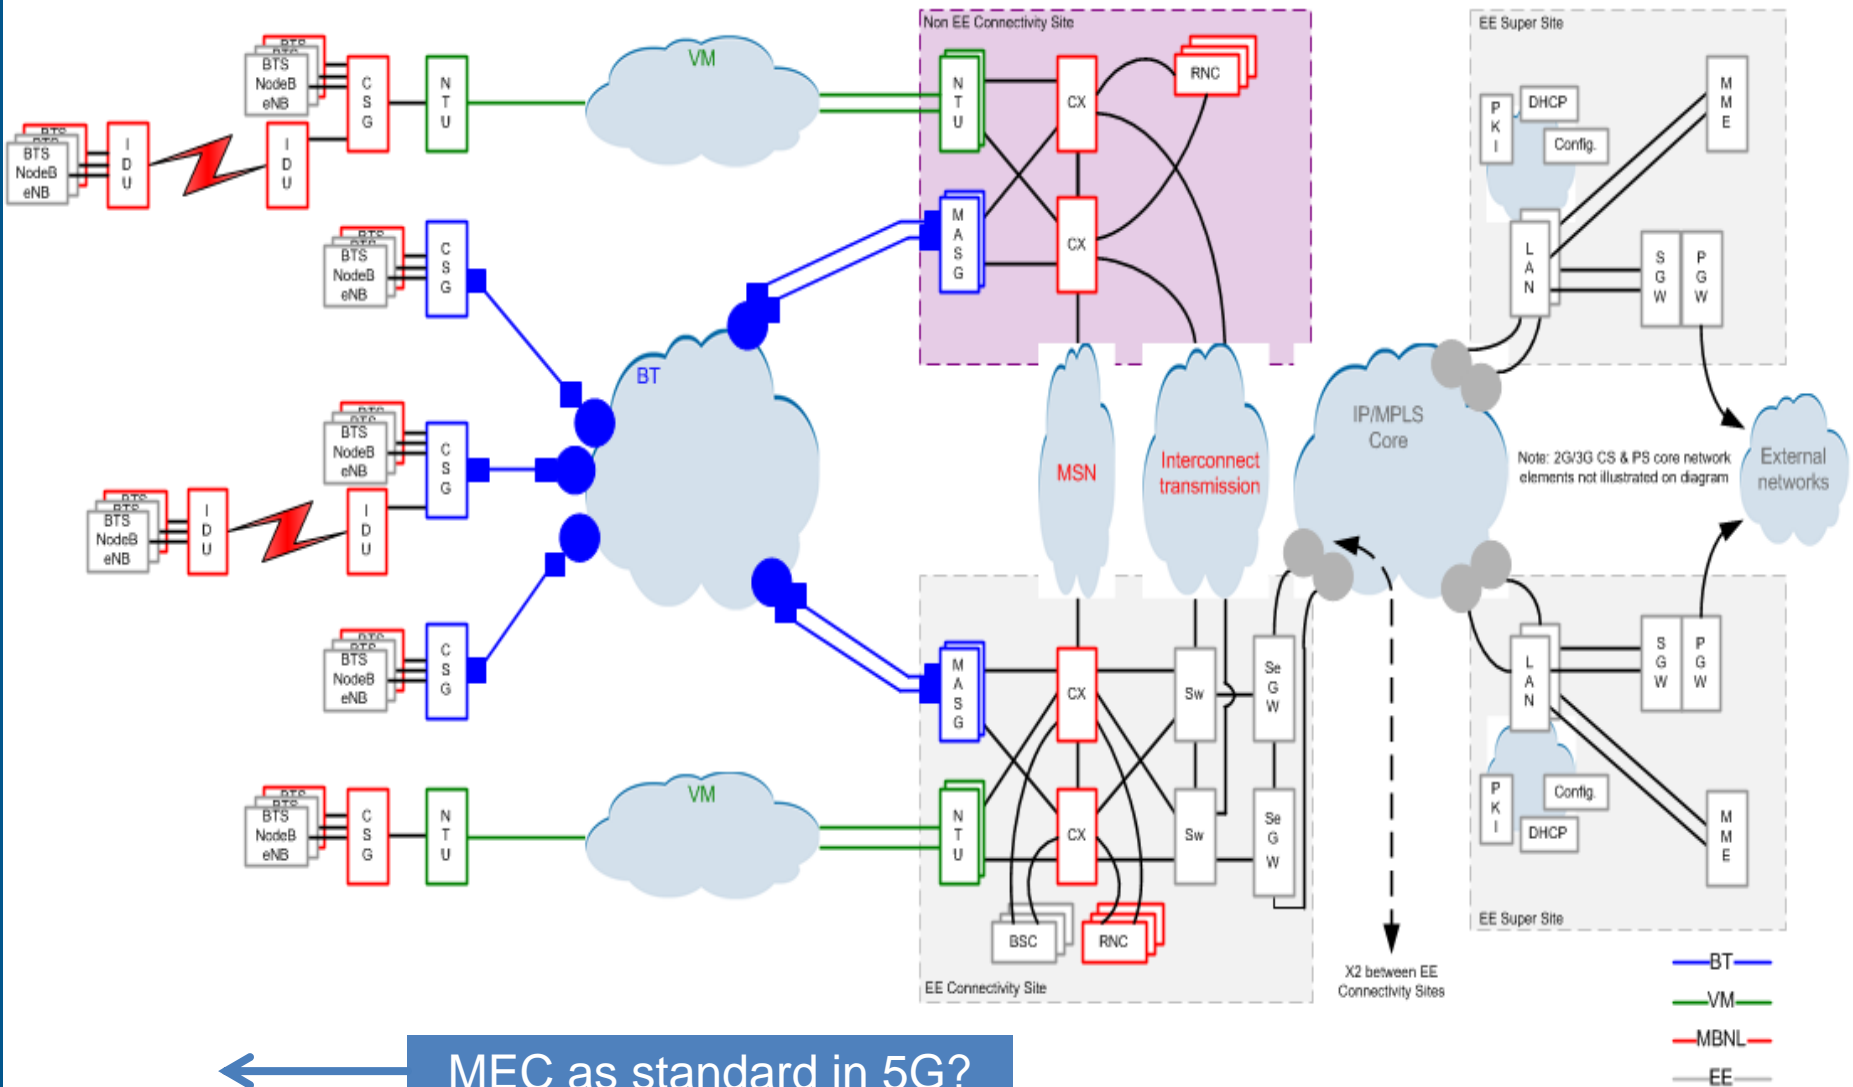


Protocol architecture - LTE User Plane

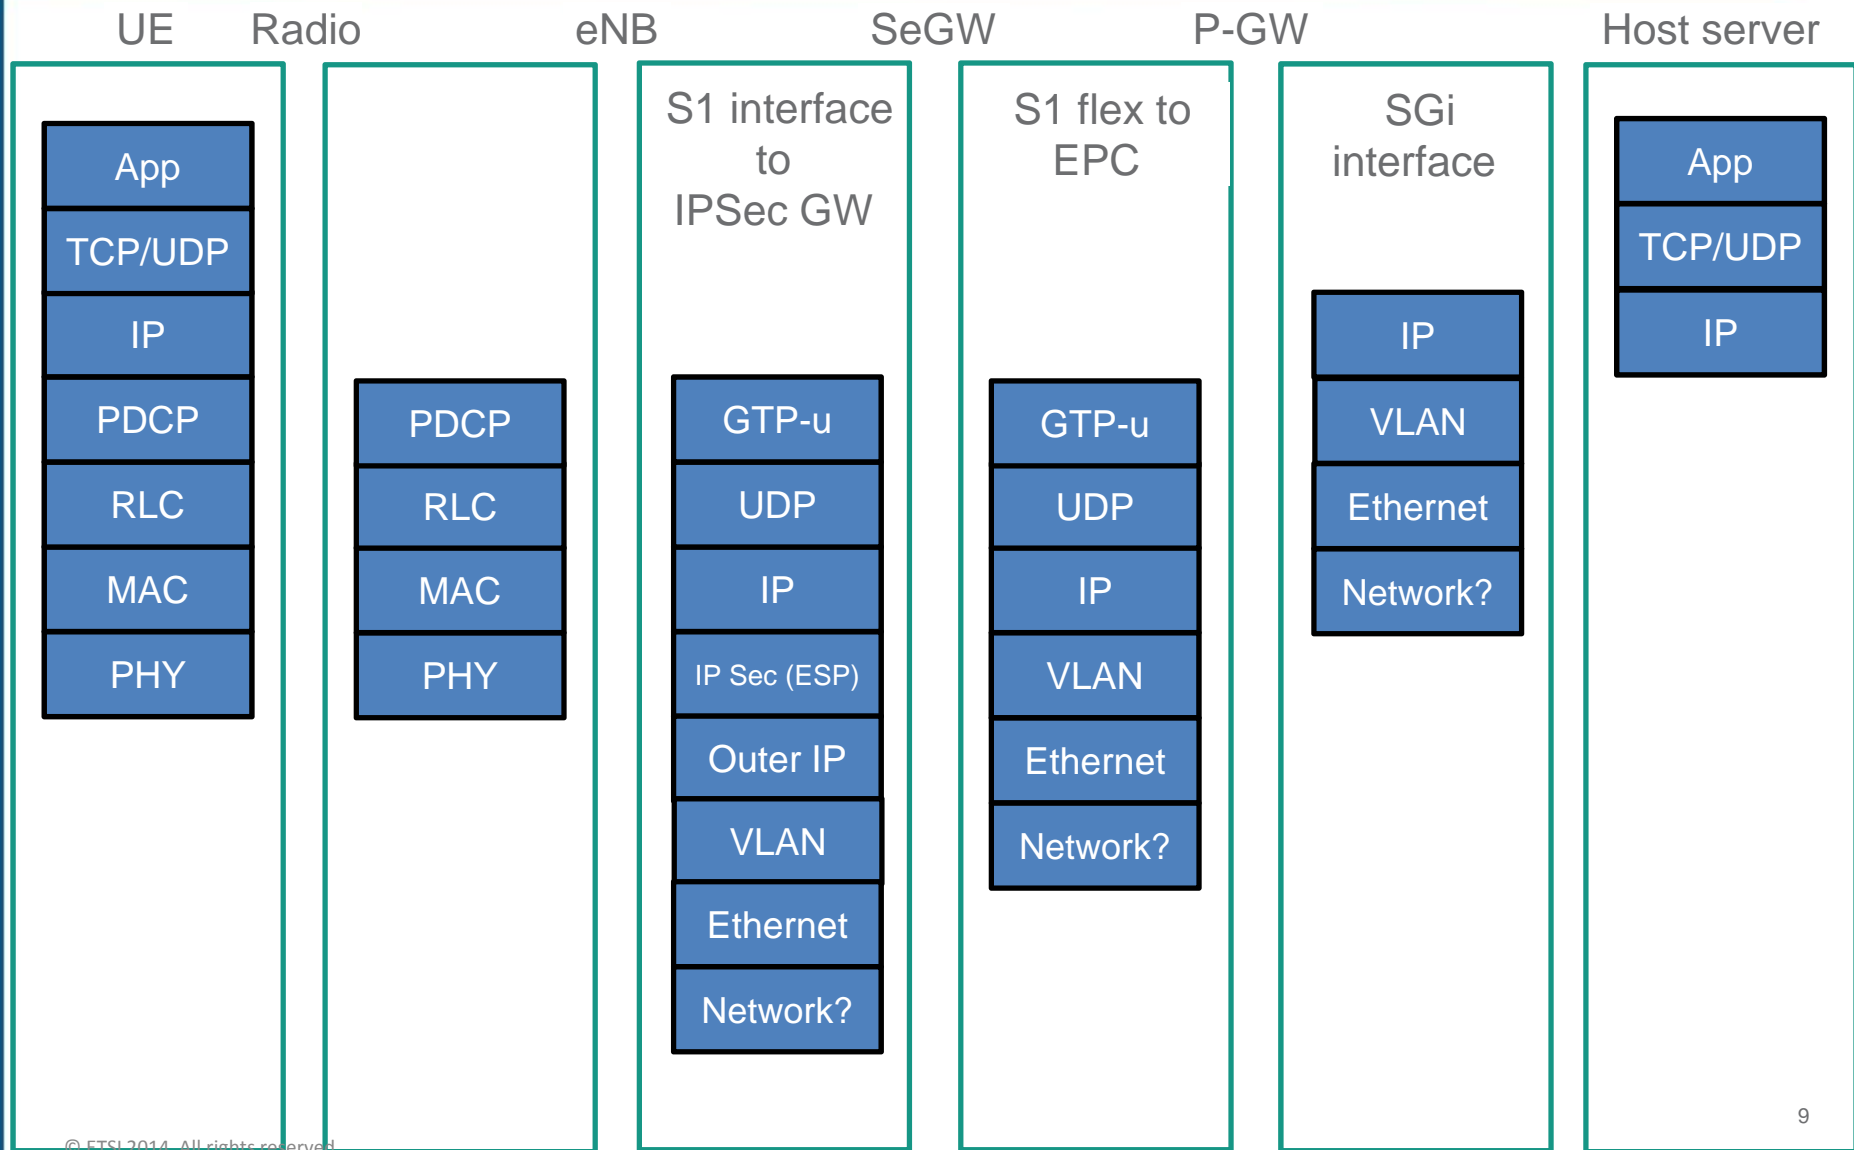

Protocol architecture - LTE User Plane

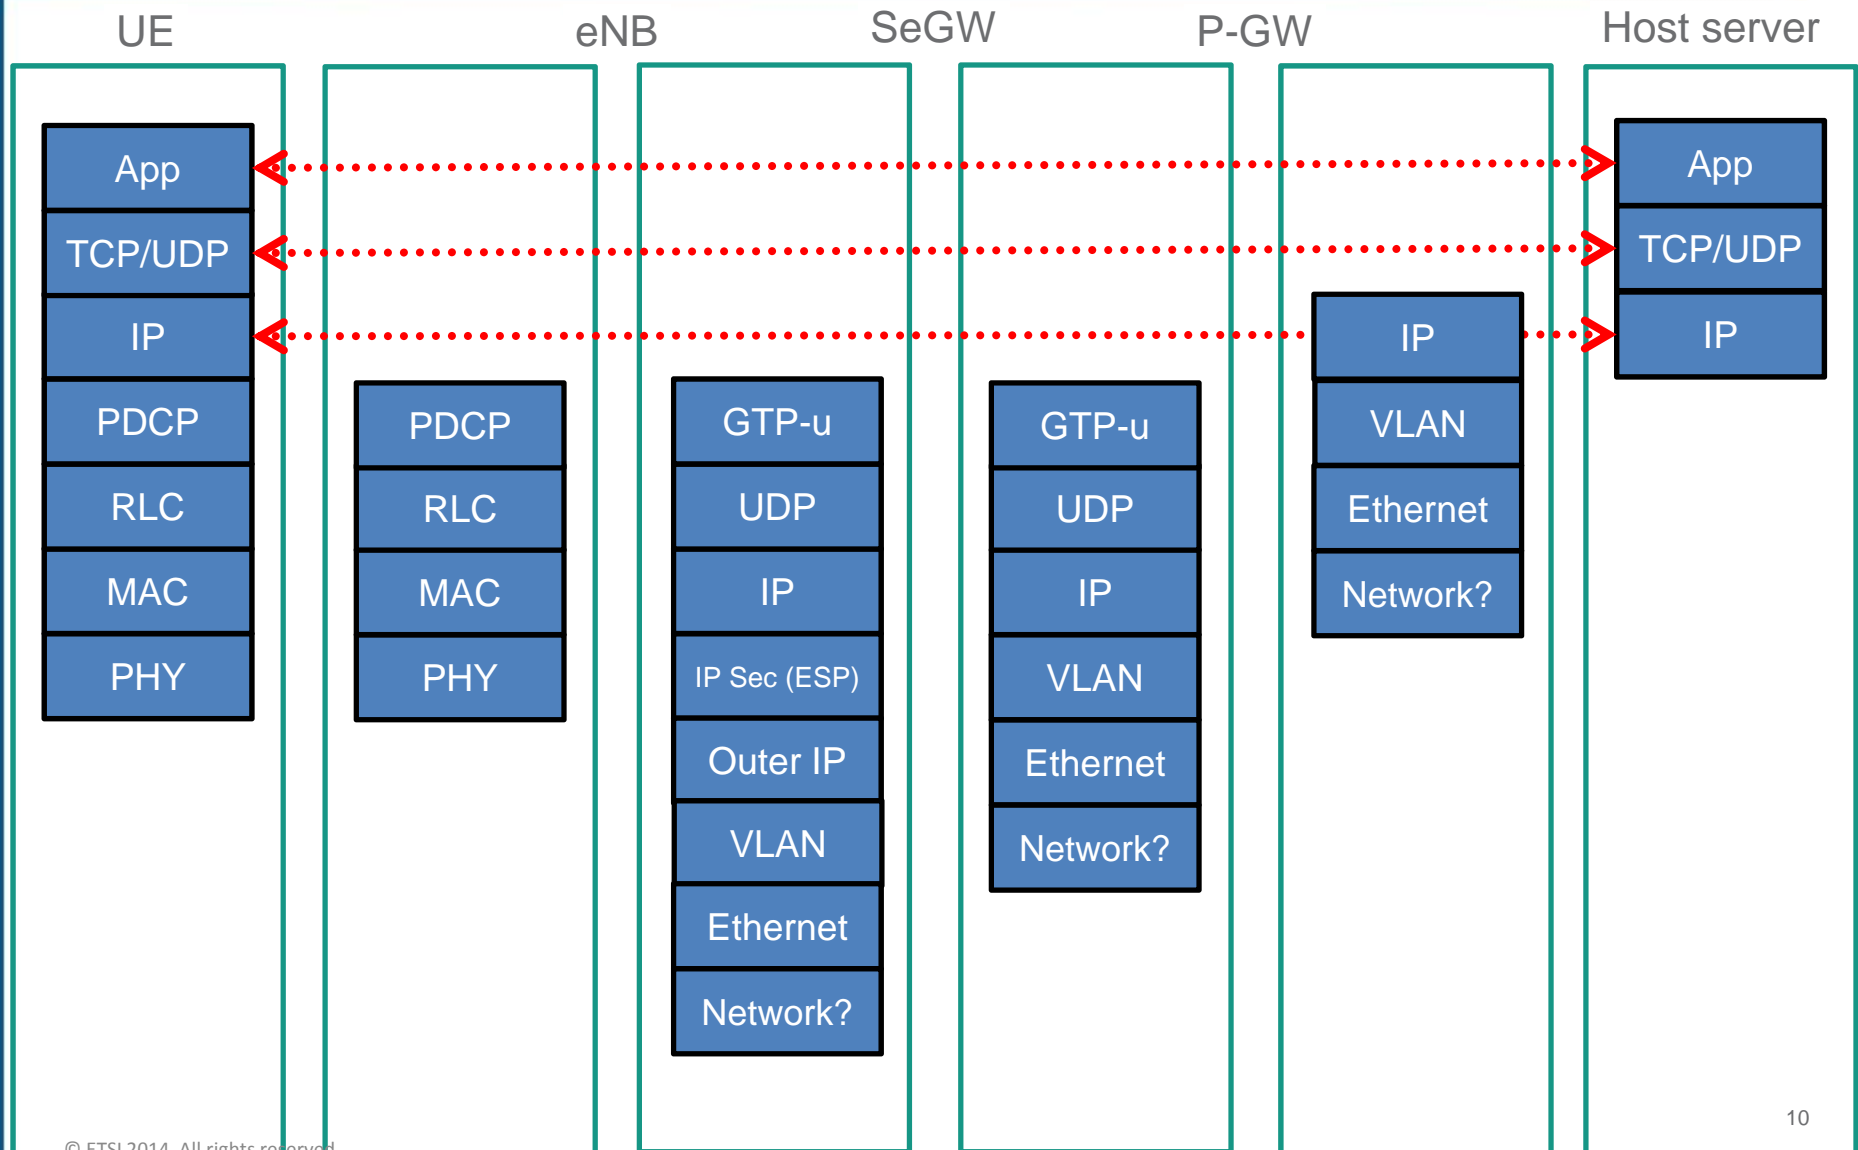


Protocol architecture - LTE User Plane

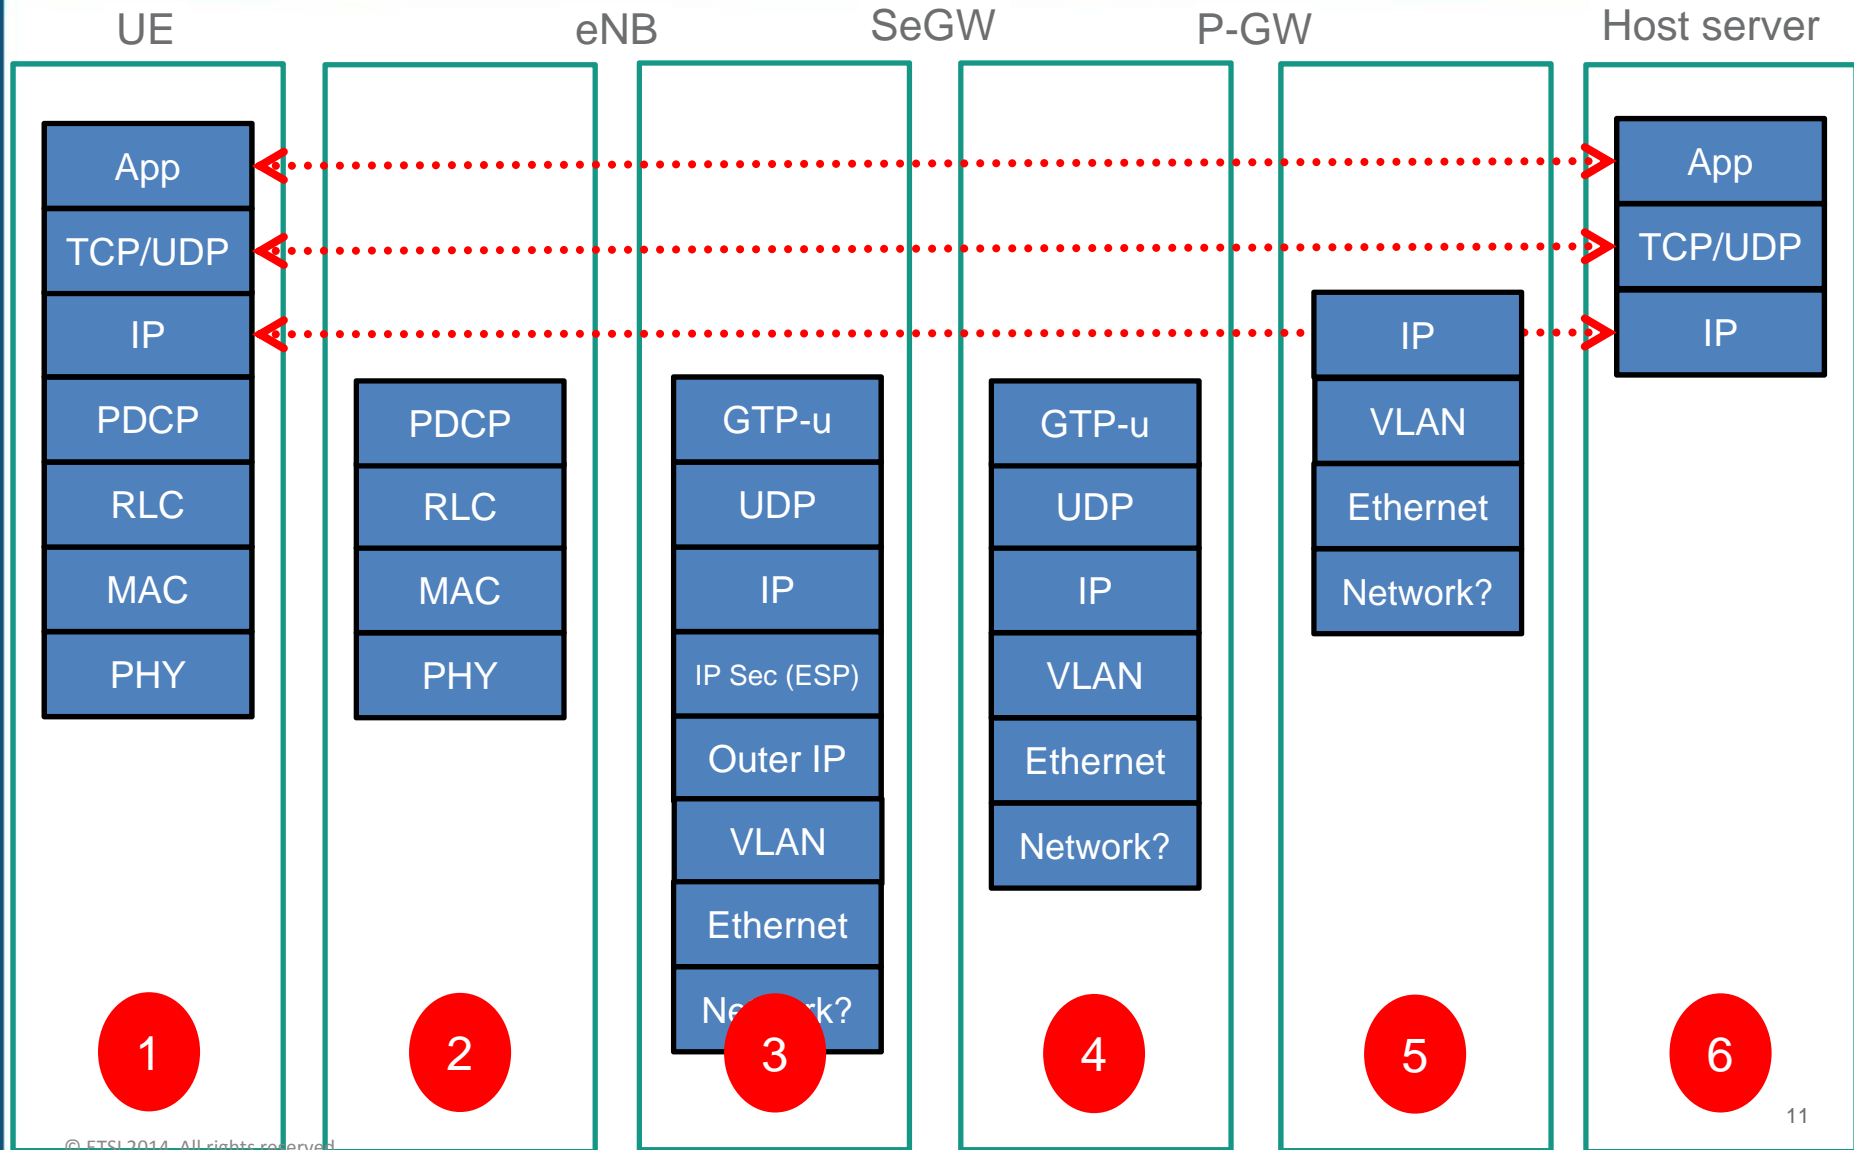

4G LTE reference diagram


- 4G LTE networks are often deployed with IPsec to ensure authentication of network connected equipment and encrypt user traffic and signalling
- Mobility is managed through a second tunnel between the base station and Packet data-network Gateway

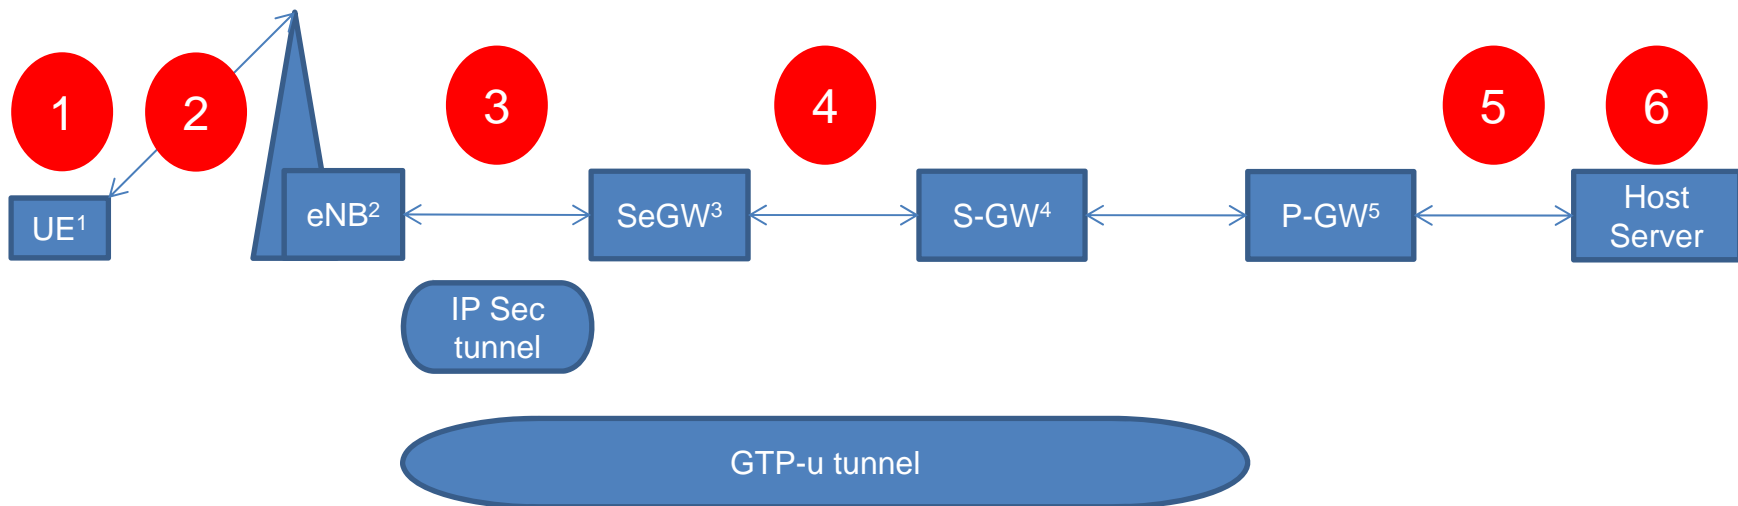

1: User Equipment - 2: evolved NodeB (LTE radio base-station) - 3: IP Security gateway - 4: Serving Gateway - 5: Packet data-network Gateway

EE of real mobile network architecture


EE UK network (including MBNL shared access)

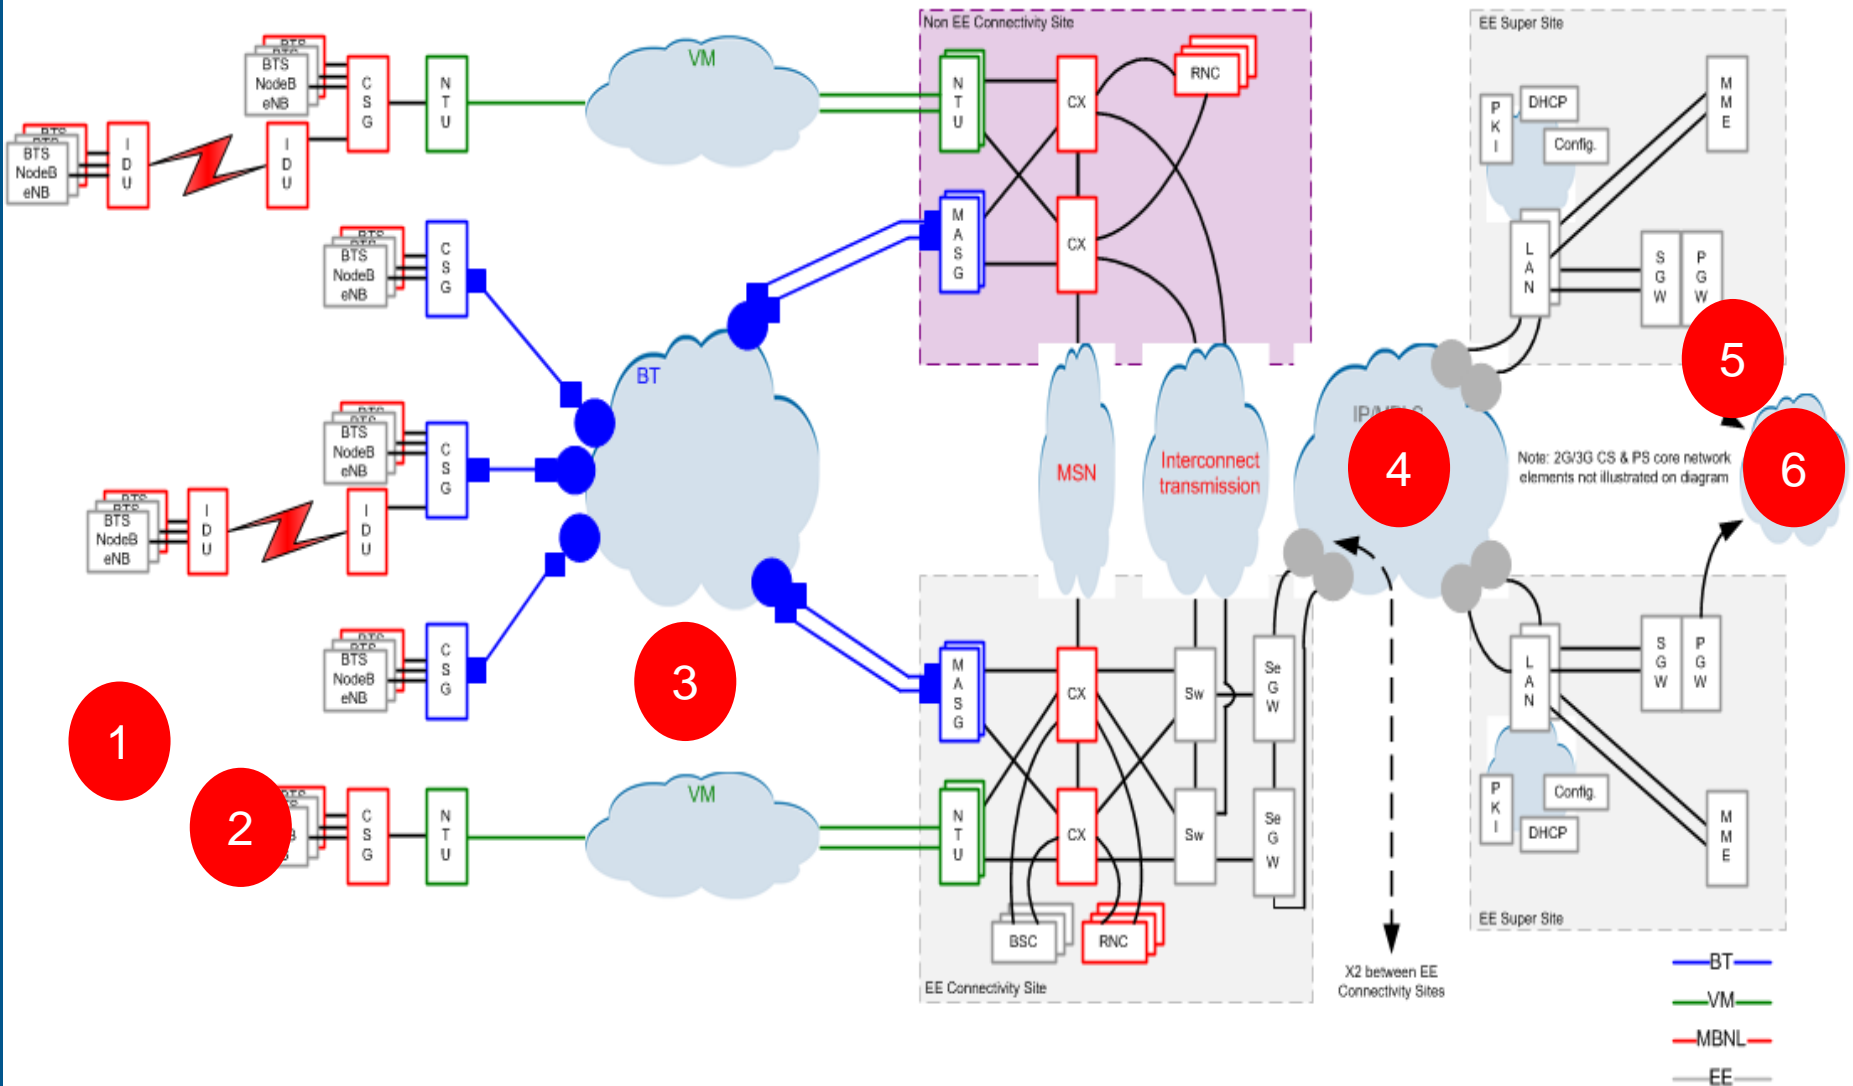

Usage scenarios of IMT for 2020 and beyond



New protocols and architectures will support the realisation of this vision....

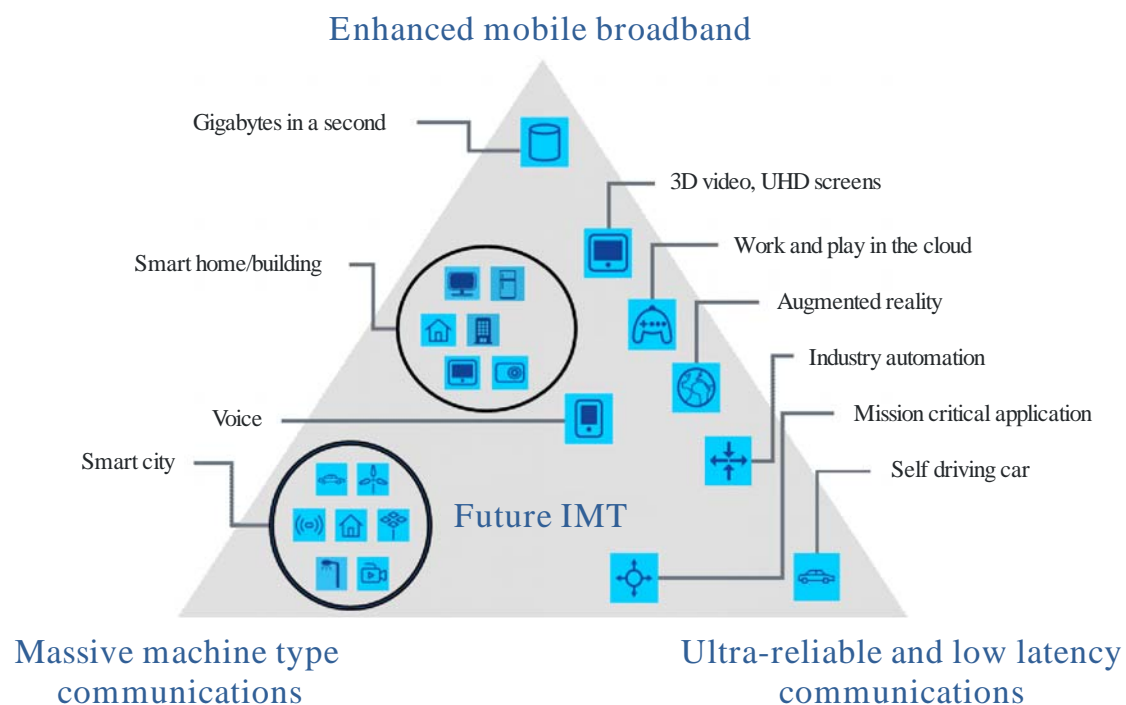

M.2083-02

Source: ITU-R M.2083-02 (09/2015)

- New protocols have the ability to enhance many aspects of networking and telecommunications
- Radio frequency spectrum is worthy of particular note as it's a finite resource
- Mobile network operators have invested significant sums of money in acquiring spectrum assets
- It's increasing important to maximise the efficient use of spectrum to ensure the continued evolution of our connected planet
- Focus on application bits per second per Hertz to truly understand radio network efficiency...

Summary of key topics to consider

- 🌐 Addressing
- 🌐 Security, Identity and authentication
- 🌐 Mobility
- 🌐 Requirements from Internet of Things
- 🌐 Requirements from video and content distribution
- 🌐 Requirements from ultra-low latency use cases from different sectors (i.e. automotive)
- 🌐 Requirements from network operators (i.e. challenges with E2E encrypted content)
- 🌐 Requirements from eCommerce
- 🌐 Requirements for increased energy efficiency within ICT sector

Welcome to the NGP ISG



The NGP ISG is open to all ETSI members and non-members
For full details of the NGP ISG including
ToR – Members and Participants agreements and how to join, please visit
<https://portal.etsi.org/tb.aspx?tbid=844&SubTB=844>

Join now ▶

Thank you!