

Text Comparison

Documents Compared

en_30190802v030201p.pdf

en_30190802v040201p.pdf

Summary

3661 word(s) added

3716 word(s) deleted

11000 word(s) matched

188 block(s) matched

To see where the changes are, please scroll down.

~~ETSI EN 301 908-2~~ ~~V3.2.1~~ (2007-05)

Harmonized European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Base Stations (BS), Repeaters and User Equipment (UE) for
IMT-2000 Third-Generation cellular networks;
Part 2: Harmonized EN for IMT-2000,
CDMA Direct Spread (UTRA FDD) (UE)
covering essential requirements
of article 3.2 of the R&TTE Directive**



ETSI EN 301 908-2 V4.2.1 (2010-03)

Harmonized European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Base Stations (BS), Repeaters and User Equipment (UE)
for IMT-2000 Third-Generation cellular networks;
Part 2: Harmonized EN for IMT-2000,
CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (UE)
covering the essential requirements
of article 3.2 of the R&TTE Directive**



Reference

~~REN/ERM-TFES-009-2~~

Keywords

3G, 3GPP, cellular, digital, IMT-2000, mobile,
radio, regulation, UMTS, WCDMA**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute ~~2007~~
All rights reserved.

~~DECT™, PLUGTESTS™ and UMTS™ are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the TIPHON logo are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.~~

Reference

REN/ERM-TFES-004-2

Keywords

3G, 3GPP, cellular, digital, IMT-2000, mobile,
radio, regulation, UMTS, WCDMA

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™, TIPHON™, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	6
Foreword.....	6
Introduction	7
1 Scope	8
2 References	8
3 Definitions, symbols and abbreviations	9
3.1 Definitions	9
3.2 Symbols	10
3.3 Abbreviations	11
4 Technical requirements specifications	11
4.1 Environmental profile.....	11
4.2 Conformance requirements	11
4.2.1 Introduction.....	12
4.2.2 Transmitter maximum output power.....	12
4.2.2.1 Definition	12
4.2.2.2 Limits	12
4.2.2.3 Conformance.....	12
4.2.3 Transmitter spectrum emission mask	13
4.2.3.1 Definition	13
4.2.3.2 Limits	13
4.2.3.3 Conformance.....	13
4.2.4 Transmitter spurious emissions.....	13
4.2.4.1 Definition	13
4.2.4.2 Limits	14
4.2.4.3 Conformance.....	14
4.2.5 Transmitter minimum output power	15
4.2.5.1 Definition	15
4.2.5.2 Limits	15
4.2.5.3 Conformance.....	15
4.2.6 Receiver Adjacent Channel Selectivity (ACS)	15
4.2.6.1 Definition	15
4.2.6.2 Limits	15
4.2.6.3 Conformance.....	15
4.2.7 Receiver blocking characteristics	16
4.2.7.1 Definition	16
4.2.7.2 Limits	16
4.2.7.3 Conformance.....	17
4.2.8 Receiver spurious response.....	17
4.2.8.1 Definition	17
4.2.8.2 Limits	17
4.2.8.3 Conformance.....	17
4.2.9 Receiver intermodulation characteristics	17
4.2.9.1 Definition	17
4.2.9.2 Limits	18
4.2.9.3 Conformance.....	18
4.2.10 Receiver spurious emissions	18
4.2.10.1 Definition	18
4.2.10.2 Limits	18
4.2.10.3 Conformance.....	19
4.2.11 Out-of-synchronization handling of output power.....	19
4.2.11.1 Definition	19
4.2.11.2 Limits	19

Contents

Intellectual Property Rights	6
Foreword	6
Introduction	7
1 Scope	8
2 References	8
2.1 Normative references	9
2.2 Informative references	9
3 Definitions, symbols and abbreviations	10
3.1 Definitions	10
3.2 Symbols	11
3.3 Abbreviations	11
4 Technical requirements specifications	12
4.1 Environmental profile	12
4.2 Conformance requirements	12
4.2.1 Introduction	12
4.2.2 Transmitter maximum output power	13
4.2.2.1 Definition	13
4.2.2.2 Limits	13
4.2.2.3 Conformance	13
4.2.3 Transmitter spectrum emission mask	13
4.2.3.1 Definition	13
4.2.3.2 Limits	14
4.2.3.3 Conformance	14
4.2.4 Transmitter spurious emissions	14
4.2.4.1 Definition	14
4.2.4.2 Limits	14
4.2.4.3 Conformance	15
4.2.5 Transmitter minimum output power	16
4.2.5.1 Definition	16
4.2.5.2 Limits	16
4.2.5.3 Conformance	16
4.2.6 Receiver Adjacent Channel Selectivity (ACS)	16
4.2.6.1 Definition	16
4.2.6.2 Limits	16
4.2.6.3 Conformance	16
4.2.7 Receiver blocking characteristics	17
4.2.7.1 Definition	17
4.2.7.2 Limits	17
4.2.7.3 Conformance	18
4.2.8 Receiver spurious response	18
4.2.8.1 Definition	18
4.2.8.2 Limits	18
4.2.8.3 Conformance	18
4.2.9 Receiver intermodulation characteristics	19
4.2.9.1 Definition	19
4.2.9.2 Limits	19
4.2.9.3 Conformance	19
4.2.10 Receiver spurious emissions	19
4.2.10.1 Definition	19
4.2.10.2 Limits	20
4.2.10.3 Conformance	21
4.2.11 Out-of-synchronization handling of output power	21
4.2.11.1 Definition	21

4.2.11.3	Conformance	20
4.2.12	Transmitter Adjacent Channel Leakage power Ratio (ACLR)	21
4.2.12.1	Definition	21
4.2.12.2	Limits	21
4.2.12.3	Conformance	21
5	Testing for compliance with technical requirements	21
5.1	Environmental conditions for testing	21
5.2	Interpretation of the measurement results	21
5.3	Essential radio test suites	23
5.3.1	Transmitter maximum output power	23
5.3.1.1	Method of test	23
5.3.1.1.1	Initial conditions	23
5.3.1.1.2	Procedure	23
5.3.1.2	Test requirements	23
5.3.2	Transmitter spectrum emission mask	23
5.3.2.1	Method of test	23
5.3.2.1.1	Initial conditions for UEs not supporting HSDPA and/or E-DCH	23
5.3.2.1.1A	Initial conditions for UEs supporting HSDPA and/or E-DCH	23
5.3.2.1.2	Procedure for UEs not supporting HSDPA and/or E-DCH	24
5.3.2.1.2A	Procedure for UEs supporting HSDPA and/or E-DCH	24
5.3.2.2	Test requirements	24
5.3.3	Transmitter spurious emissions	24
5.3.3.1	Method of test	24
5.3.3.1.1	Initial conditions	24
5.3.3.1.2	Procedure	24
5.3.3.2	Test requirements	24
5.3.4	Transmitter minimum output power	25
5.3.4.1	Method of test	25
5.3.4.1.1	Initial conditions	25
5.3.4.1.2	Procedure	25
5.3.4.2	Test requirements	25
5.3.5	Receiver Adjacent Channel Selectivity (ACS)	25
5.3.5.1	Method of test	25
5.3.5.1.1	Initial conditions	25
5.3.5.1.2	Procedure	25
5.3.5.2	Test requirements	26
5.3.6	Receiver blocking characteristics	26
5.3.6.1	Method of test	26
5.3.6.1.1	Initial requirements	26
5.3.6.1.2	Procedure	26
5.3.6.2	Test requirements	26
5.3.7	Receiver spurious response	26
5.3.7.1	Method of test	26
5.3.7.1.1	Initial conditions	26
5.3.7.1.2	Procedure	27
5.3.7.2	Test requirements	27
5.3.8	Receiver Intermodulation characteristics	27
5.3.8.1	Method of test	27
5.3.8.1.1	Initial conditions	27
5.3.8.1.2	Procedure	27
5.3.8.2	Test requirements	27
5.3.9	Receiver spurious emissions	27
5.3.9.1	Method of test	27
5.3.9.1.1	Initial conditions	27
5.3.9.1.2	Procedure	28
5.3.9.2	Test requirements	28
5.3.10	Out of synchronization handling of output power	28
5.3.10.1	Method of test	28
5.3.10.1.1	Initial conditions	28
5.3.10.1.2	Procedure	28
5.3.10.2	Test requirements	28

4.2.11.2	Limits	21
4.2.11.3	Conformance	22
4.2.12	Transmitter Adjacent Channel Leakage power Ratio (ACLR)	22
4.2.12.1	Definition	22
4.2.12.2	Limits	22
4.2.12.3	Conformance	23
5	Testing for compliance with technical requirements	23
5.1	Environmental conditions for testing	23
5.2	Interpretation of the measurement results	23
5.3	Essential radio test suites	24
5.3.1	Transmitter maximum output power	24
5.3.1.1	Method of test	24
5.3.1.1.1	Initial conditions	24
5.3.1.1.2	Procedure	24
5.3.1.2	Test requirements	25
5.3.2	Transmitter spectrum emission mask	25
5.3.2.1	Method of test	25
5.3.2.1.1	Initial conditions for UEs not supporting HSDPA and/or E-DCH	25
5.3.2.1.1A	Initial conditions for UEs supporting HSDPA and/or E-DCH	25
5.3.2.1.2	Procedure for UEs not supporting HSDPA and/or E-DCH	25
5.3.2.1.2A	Procedure for UEs supporting HSDPA and/or E-DCH	25
5.3.2.2	Test requirements	25
5.3.3	Transmitter spurious emissions	26
5.3.3.1	Method of test	26
5.3.3.1.1	Initial conditions	26
5.3.3.1.2	Procedure	26
5.3.3.2	Test requirements	26
5.3.4	Transmitter minimum output power	26
5.3.4.1	Method of test	26
5.3.4.1.1	Initial conditions	26
5.3.4.1.2	Procedure	26
5.3.4.2	Test requirements	26
5.3.5	Receiver Adjacent Channel Selectivity (ACS)	27
5.3.5.1	Method of test	27
5.3.5.1.1	Initial conditions	27
5.3.5.1.2	Procedure	27
5.3.5.2	Test requirements	27
5.3.6	Receiver blocking characteristics	27
5.3.6.1	Method of test	27
5.3.6.1.1	Initial requirements	27
5.3.6.1.2	Procedure	28
5.3.6.2	Test requirements	28
5.3.7	Receiver spurious response	28
5.3.7.1	Method of test	28
5.3.7.1.1	Initial conditions	28
5.3.7.1.2	Procedure	28
5.3.7.2	Test requirements	28
5.3.8	Receiver Intermodulation characteristics	28
5.3.8.1	Method of test	28
5.3.8.1.1	Initial conditions	28
5.3.8.1.2	Procedure	29
5.3.8.2	Test requirements	29
5.3.9	Receiver spurious emissions	29
5.3.9.1	Method of test	29
5.3.9.1.1	Initial conditions	29
5.3.9.1.2	Procedure	29
5.3.9.2	Test requirements	29
5.3.10	Out-of-synchronization handling of output power	29
5.3.10.1	Method of test	29
5.3.10.1.1	Initial conditions	29
5.3.10.1.2	Procedure	30

5.3.11	Transmitter adjacent channel leakage power ratio	29
5.3.11.1	Method of test	29
5.3.11.1.1	Initial conditions for UEs not supporting HSDPA and/or E-DCH	29
5.3.11.1.1A	Initial conditions for UEs supporting HSDPA and/or E-DCH	29
5.3.11.1.2	Procedure for UEs not supporting HSDPA and/or E-DCH	29
5.3.11.1.2A	Procedure for UEs supporting HSDPA and/or E-DCH	29
5.3.11.2	Test requirements	29
Annex A (normative):	HS Requirements and conformance Test specifications Table	
	(HS-RTT)	30
Annex B (informative):	Environmental profile	32
B.1	General	32
B.1.1	Introduction	32
B.1.2	Temperature	32
B.1.3	Voltage	32
B.1.4	Test environment	33
Annex C (informative):	The EN title in the official languages	34
Annex D (informative):	Bibliography	36
History		37

5.3.10.2	Test requirements	30
5.3.11	Transmitter adjacent channel leakage power ratio	30
5.3.11.1	Method of test	30
5.3.11.1.1	Initial conditions for UEs not supporting HSDPA and/or E-DCH	30
5.3.11.1.1A	Initial conditions for UEs supporting HSDPA and/or E-DCH	31
5.3.11.1.2	Procedure for UEs not supporting HSDPA and/or E-DCH	31
5.3.11.1.2A	Procedure for UEs supporting HSDPA and/or E-DCH	31
5.3.11.2	Test requirements	31
Annex A (normative):	HS Requirements and conformance Test specifications Table (HS-RTT)	32
Annex B (normative):	Environmental profile	34
B.1	General	34
B.1.1	Introduction	34
B.1.2	Temperature	34
B.1.3	Voltage	34
B.1.4	Test environment	35
Annex C (informative):	The EN title in the official languages	36
Annex D (informative):	Bibliography	37
History		38

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [4] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

The present document is part 2 of a multi-part deliverable covering the Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks, as identified below:

- Part 1: "Harmonized EN for IMT-2000, introduction and common requirements, covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 2: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";**
- Part 3: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 4: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 5: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) (~~BS and Repeaters~~) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 6: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 7: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 8: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 9: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 10: "Harmonized EN for IMT-2000, FDMA/TDMA (DECT) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 11: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA ~~FDD~~) (~~Repeaters~~) covering essential requirements of article 3.2 of the R&TTE Directive";

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [[1](#)] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [[2](#)] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

Technical specifications relevant to Directive 1999/5/EC [[2](#)] are given in annex A.

The present document is part 2 of a multi-part deliverable covering the Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks, as identified below:

- Part 1: "Harmonized EN for IMT-2000, introduction and common requirements, covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 2: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";**
- Part 3: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 4: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) and Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 5: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) and Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 6: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD and E-UTRA TDD) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 7: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD and E-UTRA TDD) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 8: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 9: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";

Part 12: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) (~~Repeater~~) covering essential requirements of article 3.2 of the R&TTE Directive".

National transposition dates

Date of adoption of this EN:	27 April 2007
Date of latest announcement of this EN (doa):	31 July 2007
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 January 2008
Date of withdrawal of any conflicting National Standard (dow):	31 January 2008

Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE ~~Directive~~. The modular structure is shown in EG 201 ~~399~~.

- Part 10: "Harmonized EN for IMT-2000, FDMA/TDMA (DECT) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 11: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 12: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) (Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 13: "Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 14: "Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 15: "Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (FDD Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 16: "Harmonized EN for IMT-2000, Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 17: "Harmonized EN for IMT-2000, Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive".

National transposition dates

Date of adoption of this EN:	<u>19 February 2010</u>
Date of latest announcement of this EN (doa):	31 <u>May 2010</u>
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	<u>30 November 2010</u>
Date of withdrawal of any conflicting National Standard (dow):	<u>30 November 2011</u>

Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive [i 2]. The modular structure is shown in EG 201 399 [i 3].

1 Scope

The present document applies to the following radio equipment type:

- User Equipment for IMT-2000 CDMA Direct Spread (UTRA FDD).

These radio equipment types are capable of operating in all or any part of the frequency bands given in table 1.

Table 1: ~~CDMA direct spread service frequency bands~~

Band	Direction of transmission	CDMA direct spread service frequency bands
I	Transmit	1 920 MHz to 1 980 MHz
	Receive	2 110 MHz to 2 170 MHz
III	Transmit	1 710 MHz to 1 785 MHz
	Receive	1 805 MHz to 1 880 MHz
VII	Transmit	2 500 MHz to 2 570 MHz
	Receive	2 620 MHz to 2 690 MHz
VIII	Transmit	800 MHz to 915 MHz
	Receive	925 MHz to 960 MHz

The present document covers requirements for UTRA FDD User Equipments from 3GPP Release 99, 4, 5, ~~6 and 7~~, including User Terminals supporting ~~HS-PDSCH~~ using ~~QPSK and 16QAM~~ modulation and User Terminals supporting ~~E-DCH~~. The present document is intended to cover the provisions of Directive 1999/5/EC [1] article 3.2, which states that "radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [1] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org/>.

2 References

~~The following documents contain provisions which, through reference in this text, constitute provisions of the present document:~~

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- ~~For a non-specific reference, the latest version applies.~~

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

[1] ~~Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).~~

[2] ~~Void.~~

[3] ~~Void.~~

1 Scope

The present document applies to the following radio equipment type:

- User Equipment for IMT-2000 CDMA Direct Spread (UTRA FDD and E-UTRA FDD).

These radio equipment types are capable of operating in all or any part of the frequency bands given in table 1-1.

Table 1-1: UTRA FDD operating bands

<u>UTRA FDD Band</u>	<u>Direction of transmission</u>	<u>UTRA FDD operating bands</u>
<u>I</u>	Transmit	1 920 MHz to 1 980 MHz
	Receive	2 110 MHz to 2 170 MHz
<u>III</u>	Transmit	1 710 MHz to 1 785 MHz
	Receive	1 805 MHz to 1 880 MHz
<u>VII</u>	Transmit	2 500 MHz to 2 570 MHz
	Receive	2 620 MHz to 2 690 MHz
<u>VIII</u>	Transmit	880 MHz to 915 MHz
	Receive	925 MHz to 960 MHz
<u>XV</u>	Transmit	1 900 MHz to 1 920 MHz
	Receive	2 600 MHz to 2 620 MHz
<u>XVI</u>	Transmit	2 010 MHz to 2 025 MHz
	Receive	2 585 MHz to 2 600 MHz

The present document covers requirements for UTRA FDD User Equipments from 3GPP Release 99, 4, 5, 6, 7 and 8 and E-UTRA FDD User Equipment Release 8. In addition, the present document covers requirements for UTRA FDD User Equipment in the operating bands specified in TS 102 735 [i.4].

The present document is intended to cover the provisions of Directive 1999/5/EC [i.2] (R&TTE Directive) article 3.2, which states that "radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [i.2] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org/>.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - = if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - = for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

- [4] ~~ETSI TR 100 028 (all parts) (V1.4.1): "Electromagnetic Compatibility and Radio spectrum Matters (ERM), Uncertainties in the measurement of mobile radio equipment characteristics".~~
- [5] ~~Void.~~
- [6] ~~ETSI TS 134 121-1 (V7.3.0): "Universal Mobile Telecommunications System (UMTS); User Equipment (UE) conformance specification; Radio transmission and reception (FDD) (3GPP TS 34.121 version 7.3.0 Release 7)".~~
- [7] ~~ETSI TS 134 108 (V6.5.0): "Universal Mobile Telecommunications System (UMTS); Common test environments for User Equipment (UE) conformance testing (3GPP TS 34.108 version 6.5.0 Release 6)".~~
- [8] ~~ETSI TS 134 109 (V7.2.0): "Universal Mobile Telecommunications System (UMTS); Terminal logical test interface; Special conformance testing functions, Release 7".~~
- [9] ~~Void.~~
- [10] ~~Void.~~
- [11] ~~ETSI TS 125 101 (V7.6.0): "Universal Mobile Telecommunications System (UMTS); User Equipment (UE) radio transmission and reception (FDD) (3GPP TS 25.101 version 7.6.0 Release 7)".~~
- [12] ~~IEC 60068 2-1: "Environmental testing - Part 2-1: Tests. Tests A: Cold".~~
- [13] ~~IEC 60068 2-2: "Environmental testing - Part 2-2: Tests. Tests B: Dry heat".~~
- [14] ~~ETSI TS 125 214 (V7.3.0): "Universal Mobile Telecommunications System (UMTS); Physical layer procedures (FDD) (3GPP TS 25.214 version 7.3.0 Release 7)".~~
- [15] ~~ETSI TS 145 004 (V6.0.0): "Digital cellular telecommunications system (Phase 2+); Modulation (3GPP TS 45.004 version 6.0.0 Release 6)".~~
- [16] ETSI EN 301 908-1 (~~V3.2.1~~): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 1: Harmonized EN for IMT-2000, introduction and common requirements, covering essential requirements of article 3.2 of the R&TTE Directive".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions ~~given in the R&TTE Directive [1] and the following~~ apply:

chip rate: rate of "chips" (modulated symbols after spreading) per second

NOTE: The UTRA FDD chip rate is 3,84 Mchip/s.

data rate: rate of the user information, which must be transmitted over the Air Interface

EXAMPLE: Output rate of the voice codec.

environmental profile: range of environmental conditions under which equipment within the scope of the present document is required to comply with the provisions of the present document

maximum output power: measure of the maximum power the UE can transmit (i.e. the actual power as would be measured assuming no measurement error) in a bandwidth of at least $(1 + \alpha)$ times the chip rate of the radio access mode. The period of measurement shall be at least one timeslot

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] Void
- [2] ETSI TS 134 121-1 (V8 8 0): "Universal Mobile Telecommunications System (UMTS); User Equipment (UE) conformance specification; Radio transmission and reception (FDD); Part 1: Conformance specification (3GPP TS 34 121-1 version 8 8 0 Release 8)"
- [3] ETSI TS 134 108 (V8 8 0): "Universal Mobile Telecommunications System (UMTS); LTE; Common test environments for User Equipment (UE): Conformance testing (3GPP TS 34 108 version 8 8 0 Release 8)"
- [4] ETSI TS 134 109 (V8 0 0): "Universal Mobile Telecommunications System (UMTS); LTE; Terminal logical test interface: Special conformance testing functions (3GPP TS 34 109 version 8 0 0 Release 8)"
- [5] ETSI TS 125 101 (V8 8 0): "Universal Mobile Telecommunications System (UMTS); User Equipment (UE) radio transmission and reception (FDD) (3GPP TS 25.101 version 8 8 0 Release 8)"
- [6] IEC 60068-2-1 (2007): "Environmental testing - Part 2-1: Tests. Test A: Cold"
- [7] IEC 60068-2-2 (2007): "Environmental testing - Part 2-2: Tests. Test B: Dry heat"
- [8] ETSI TS 125 214 (V8 6 0): "Universal Mobile Telecommunications System (UMTS); Physical layer procedures (FDD) (3GPP TS 25.214 version 8 6 0 Release 8)"
- [9] ETSI TS 145 004 (V8 0 0): "Digital cellular telecommunications system (Phase 2+); Modulation (3GPP TS 45.004 version 8 0 0 Release 8)"
- [10] ETSI EN 301 908-1 (V4 1 2): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 1: Harmonized EN for IMT-2000, introduction and common requirements, covering the essential requirements of article 3.2 of the R&TTE Directive"
- [11] ETSI EN 301 908-13 (V4 1 2): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 13: Harmonized EN for IMT-2000 Evolved Universal Terrestrial Radio Access (E-UTRA) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive"

2.2 Informative references

The following referenced documents are not essential to the use of the present document but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

- [i.1] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations
- [i.2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive)
- [i.3] ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM): A guide to the production of candidate Harmonized Standards for application under the R&TTE Directive"

mean power: power (transmitted or received) in a bandwidth of at least $(1 + \alpha)$ times the chip rate of the radio access mode, when applied to a WCDMA modulated ~~signal~~. The period of measurement ~~shall~~ be at least one timeslot unless otherwise ~~stated~~

node B: logical node responsible for radio transmission/reception in one or more cells to/from the User Equipment

nominal maximum output power: nominal power defined by the UE power class

power spectral density: function of power versus frequency and when integrated across a given bandwidth, the function represents the mean power in such a bandwidth

NOTE 1: When the mean power is normalized to (divided by) the chip-rate it represents the mean energy per chip. Some signals are directly defined in terms of energy per chip, (DPCH_Ec, Ec, OCNS_Ec and S-CCPCH_Ec) and others defined in terms of PSD (I_o , I_{oc} , I_{or} and \hat{I}_{or}). There also exist quantities that are a ratio of energy per chip to PSD (DPCH_Ec/ I_{or} , Ec/ I_{or} , etc.). This is the common practice of relating energy magnitudes in communication systems.

NOTE 2: It can be seen that if both energy magnitudes in the ratio are divided by time, the ratio is converted from an energy ratio to a power ratio, which is more useful from a measurement point of view. It follows that an energy per chip of X dBm/3,84 MHz can be expressed as a mean power per chip of X dBm. Similarly, a signal PSD of Y dBm/3,84 MHz can be expressed as a signal power of Y dBm.

NOTE 3: The units of Power Spectral Density (PSD) are extensively used in the present document.

RRC filtered mean power: mean power as measured through a root raised cosine filter with roll-off factor α and a bandwidth equal to the chip rate of the radio access mode

NOTE: The RRC filtered mean power of a perfectly modulated WCDMA signal is 0,246 dB lower than the mean power of the same signal.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

α	Roll-off factor of the root raised cosine filter, $\alpha = 0,22$
DPCH_Ec	Average energy per PN chip for DPCH
E_c	Average energy per PN chip
F_{uw}	Frequency of unwanted signal

NOTE: This is specified in bracket in terms of an absolute frequency(s) or a frequency offset from the assigned channel frequency.

I_{oc}	Power spectral density (integrated in a noise bandwidth equal to the chip rate and normalized to the chip rate) of a band limited white noise source (simulating interference from cells, which are not defined in a test procedure) as measured at the UE antenna connector
I_{or}	Total transmit power spectral density (integrated in a bandwidth of $(1 + \alpha)$ times the chip rate and normalized to the chip rate) of the downlink signal at the Node B antenna connector
\hat{I}_{or}	Received power spectral density (integrated in a bandwidth of $(1 + \alpha)$ times the chip rate and normalized to the chip rate) of the downlink signal as measured at the UE antenna connector
β_c	Gain factor for DPCCCH
β_d	Gain factor for DPDCH
β_{hs}	Gain factor for HS-DPCCH
β_{ec}	Gain factor for E-DPCCH
β_{ed}	Gain factor for E-DPDCH

- [i.4] [ETSI TS 102 735 \(V7.0.1\): "Universal Mobile Telecommunications System \(UMTS\); Band-specific requirements for UMTS Frequency Division Duplex \(FDD\) operation in the bands 1 900 MHz to 1 920 MHz paired with 2 600 MHz to 2 620 MHz and 2 010 MHz to 2 025 MHz paired with 2 585 MHz to 2 600 MHz"](#)
- [i.5] [ETSI TR 102 215 \(V1.3.1\): "Electromagnetic compatibility and Radio spectrum Matters \(ERM\); Recommended approach, and possible limits for measurement uncertainty for the measurement of radiated electromagnetic fields above 1 GHz"](#)
- [i.6] [ETSI TR 100 028 \(all parts\) \(V1.4.1\): "Electromagnetic compatibility and Radio spectrum Matters \(ERM\); Uncertainties in the measurement of mobile radio equipment characteristics"](#)

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the [following](#) terms and definitions apply:

chip rate: rate of "chips" (modulated symbols after spreading) per second

NOTE: The UTRA FDD chip rate is 3,84 Mchip/s.

data rate: rate of the user information, which must be transmitted over the Air Interface

EXAMPLE: Output rate of the voice codec.

environmental profile: range of environmental conditions under which equipment within the scope of the present document is required to comply with the provisions of the present document

maximum output power: measure of the maximum power the UE can transmit (i.e. the actual power as would be measured assuming no measurement error) in a bandwidth of at least $(1 + \alpha)$ times the chip rate of the radio access [mode](#)

NOTE: The period of measurement [is assumed to be](#) at least one [timeslot](#).

mean power: power (transmitted or received) in a bandwidth of at least $(1 + \alpha)$ times the chip rate of the radio access mode, when applied to a WCDMA modulated [signal](#)

NOTE: The period of measurement [is assumed to be](#) at least one timeslot unless otherwise [stated](#).

node B: logical node responsible for radio transmission/reception in one or more cells to/from the User Equipment

nominal maximum output power: nominal power defined by the UE power class

power spectral density: function of power versus frequency and when integrated across a given bandwidth, the function represents the mean power in such a bandwidth

NOTE 1: When the mean power is normalized to (divided by) the chip-rate it represents the mean energy per chip. Some signals are directly defined in terms of energy per chip, (DPCH_Ec, Ec, OCNS_Ec and S-CCPCH_Ec) and others defined in terms of PSD (I_0 , I_{oc} , I_{or} and \hat{I}_{or}). There also exist quantities that are a ratio of energy per chip to PSD (DPCH_Ec/ I_{or} , Ec/ I_{or} , etc.). This is the common practice of relating energy magnitudes in communication systems.

NOTE 2: It can be seen that if both energy magnitudes in the ratio are divided by time, the ratio is converted from an energy ratio to a power ratio, which is more useful from a measurement point of view. It follows that an energy per chip of X dBm/3,84 MHz can be expressed as a mean power per chip of X dBm. Similarly, a signal PSD of Y dBm/3,84 MHz can be expressed as a signal power of Y dBm.

NOTE 3: The units of Power Spectral Density (PSD) are extensively used in the present document.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

16QAM	16-Quadrature Amplitude Modulation
ACLR	Adjacent Channel Leakage power Ratio
ACS	Adjacent Channel Selectivity
BER	Bit Error Ratio
CW	Continuous Wave

NOTE: Unmodulated signal.

DPCCH	Dedicated Physical Control CHannel
DPDCH	Dedicated Physical Data CHannel
E-DCH	Enhanced Dedicated CHannel
EMC	ElectroMagnetic Compatibility
FDD	Frequency Division Duplex
HSDPA	High Speed Downlink Packet Access
HS-DSCH	High Speed Physical Downlink Shared CHannel
IMT-2000	International Mobile Telecommunications 2000
OCNS	Orthogonal Channel Noise Simulator

NOTE: A mechanism used to simulate the users or control signals on the other orthogonal channels of a downlink.

QPSK	Quadrature Phase Shift Keying
PN	PseudoNoise
PSD	Power Spectral Density
<REFSENS>	Reference sensitivity
<REF I_{cr}>	Reference I_{cr}
RF	Radio Frequency
RRC	Root Raised Cosine
R&TTE	Radio and Telecommunications Terminal Equipment
SS	System Simulator (see TS 134 121-1 [6])
TPC	Transmit Power Control
UARFCN	UTRA Absolute Radio Frequency Channel Number
UE	User Equipment
UTRA	Universal Terrestrial Radio Access
WCDMA	Wideband Code Division Multiple Access

4 Technical requirements specifications

4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the supplier. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

For guidance on how a supplier can declare the environmental profile see annex B.

4.2 Conformance requirements

The requirements in the present document are based on the assumption that the operating band (e.g. band I, III, ~~VII and VIII~~) is shared between systems of the IMT-2000 family (for band III and VIII also GSM) or systems having compatible characteristics.

RRC filtered mean power: mean power as measured through a root raised cosine filter with roll-off factor α and a bandwidth equal to the chip rate of the radio access mode

NOTE: The RRC filtered mean power of a perfectly modulated WCDMA signal is 0,246 dB lower than the mean power of the same signal.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

α	Roll-off factor of the root raised cosine filter, $\alpha = 0,22$
DPCH_Ec	Average energy per PN chip for DPCH
E_c	Average energy per PN chip
F_{uw}	Frequency of unwanted signal

NOTE: This is specified in bracket in terms of an absolute frequency(s) or a frequency offset from the assigned channel frequency.

I_a	<u>The total received power spectral density, including signal and interference, as measured at the UE antenna connector</u>
I_{oc}	Power spectral density (integrated in a noise bandwidth equal to the chip rate and normalized to the chip rate) of a band limited white noise source (simulating interference from cells, which are not defined in a test procedure) as measured at the UE antenna connector
I_{or}	Total transmit power spectral density (integrated in a bandwidth of $(1 + \alpha)$ times the chip rate and normalized to the chip rate) of the downlink signal at the Node B antenna connector
\hat{I}_{or}	Received power spectral density (integrated in a bandwidth of $(1 + \alpha)$ times the chip rate and normalized to the chip rate) of the downlink signal as measured at the UE antenna connector
β_c	Gain factor for DPCCH
β_d	Gain factor for DPDCH
β_{hs}	Gain factor for HS-DPCCH
β_{ec}	Gain factor for E-DPCCH
β_{ed}	Gain factor for E-DPDCH

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACLR	Adjacent Channel Leakage power Ratio
ACS	Adjacent Channel Selectivity
BER	Bit Error Ratio
CW	Continuous Wave

NOTE: Unmodulated signal.

<u>DCH</u>	<u>Dedicated Channel, which is mapped into Dedicated Physical Channel</u>
DPCCH	Dedicated Physical Control CHannel
DPDCH	Dedicated Physical Data CHannel
E-DCH	Enhanced Dedicated CHannel
<u>E-UTRA</u>	<u>Evolved Universal Terrestrial Radio Access</u>
EMC	ElectroMagnetic Compatibility
FDD	Frequency Division Duplex
HSDPA	High Speed Downlink Packet Access
IMT-2000	International Mobile Telecommunications 2000
OCNS	Orthogonal Channel Noise Simulator

NOTE: A mechanism used to simulate the users or control signals on the other orthogonal channels of a downlink.

4.2.1 Introduction

To meet the essential requirement under article 3.2 of the ~~RETTTE Directive [1]~~ for IMT-2000 User Equipment (UE) eight essential parameters in addition to those in EN 301 908-1 [16] ~~have been identified. Table 2 provides a cross reference between these eight essential parameters and the corresponding eleven technical requirements for equipment within the scope of the present document.~~

Table 2: Cross references

Essential parameter	Corresponding technical requirements
Spectrum emissions mask	4.2.9 Transmitter Spectrum emissions mask
	4.2.12 Transmitter adjacent channel leakage power ratio
Conducted spurious emissions in active mode	4.2.4 Transmitter spurious emissions
Accuracy of maximum output power	4.2.2 Transmitter maximum output power
Prevention of harmful interference through control of power	4.2.5 Transmitter minimum output power
Conducted spurious emission in idle mode	4.2.10 Receiver spurious emissions
Impact of interference on receiver performance	4.2.7 Receiver Blocking characteristics
	4.2.8 Receiver spurious response
	4.2.9 Receiver Intermodulation characteristics
Receiver adjacent channel selectivity	4.2.6 Receiver Adjacent Channel Selectivity (ACS)
Control and Monitoring functions	4.2.11 Out of synchronization handling of output power

~~The technical requirements apply for~~ declared operating bands. The technical requirements for HSDPA and E-DCH apply only to UEs supporting these features.

4.2.2 Transmitter maximum output power

4.2.2.1 Definition

The nominal maximum output power and its tolerance are defined according to the power class of the UE.

The nominal power defined is the broadband transmit power of the UE, i.e. the power in a bandwidth of at least $(1 + \alpha)$ times the chip rate of the radio access mode. The period of measurement shall be at least one timeslot.

4.2.2.2 Limits

The UE maximum output power shall be within the shown value in table 3 even for the multi-code DPDCH transmission mode.

Table 3: UE power classes

Operating Band	Power Class 3		Power Class 3bis		Power Class 4	
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)
Band I	+24	+1,7/-3,7			+21	+2,7/-2,7
Band III	+24	+1,7/-3,7			+21	+2,7/-2,7
Band VII	+24	+1,7/-3,7	+23	+2,7/-2,7	+21	+2,7/-2,7
Band VIII	+24	+1,7/-3,7	+23	+2,7/-2,7	+21	+2,7/-2,7

NOTE: These requirements do not take into account the maximum power reduction allowed to the UE in the presence of HS-DPCCH and E-DCH specified in TS 125 101 [11].

4.2.2.3 Conformance

Conformance tests described in clause 5.3.1 shall be carried out.

PN	PseudoNoise
PSD	Power Spectral Density
<REFSENS>	Reference sensitivity
RF	Radio Frequency
RRC	Root Raised Cosine
R&TTE	Radio and Telecommunications Terminal Equipment
SS	System Simulator

NOTE: [See TS 134 121-1 \[2\]](#).

TH	Temperature High
TL	Temperature Low
TPC	Transmit Power Control
UARFCN	UTRA Absolute Radio Frequency Channel Number
UE	User Equipment
UTRA	Universal Terrestrial Radio Access
WCDMA	Wideband Code Division Multiple Access

4 Technical requirements specifications

4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the supplier. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

For guidance on how a supplier can declare the environmental profile see annex B.

4.2 Conformance requirements

The requirements in the present document are based on the assumption that the operating band (e.g. band I, III, [VII](#), [VIII](#), [XV](#) and [XVI](#)) is shared between systems of the IMT-2000 family (for band III and VIII also GSM) or systems having compatible characteristics. [Requirements for E-UTRA FDD User Equipment are given in EN 301 908-13 \[11\]](#).

4.2.1 Introduction

To meet the essential requirement under article 3.2 of the [Directive 1999/5/EC \[2\] \(R&TTE Directive\)](#) for IMT-2000 User Equipment (UE) eight essential parameters in addition to those in EN 301 908-1 [\[10\] have been identified](#). [Table 4.2.1-1](#) provides a cross reference between these eight essential parameters and the corresponding eleven technical requirements for equipment within the scope of the present document.

Table 4.2.1-1: Cross references

Essential parameter	Corresponding technical requirements
Spectrum emissions mask	4.2.3 Transmitter Spectrum emissions mask
	4.2.12 Transmitter adjacent channel leakage power ratio
Conducted spurious emissions in active mode	4.2.4 Transmitter spurious emissions
Accuracy of maximum output power	4.2.2 Transmitter maximum output power
Prevention of harmful interference through control of power	4.2.5 Transmitter minimum output power
Conducted spurious emission in idle mode	4.2.10 Receiver spurious emissions
Impact of interference on receiver performance	4.2.7 Receiver Blocking characteristics
	4.2.8 Receiver spurious response
	4.2.9 Receiver Intermodulation characteristics
Receiver adjacent channel selectivity	4.2.6 Receiver Adjacent Channel Selectivity (ACS)
Control and Monitoring functions	4.2.11 Out of synchronization handling of output power

4.2.3 Transmitter spectrum emission mask

4.2.3.1 Definition

The spectrum emission mask of the UE applies to frequencies, which are between 2,5 MHz and 12,5 MHz away from the UE centre carrier frequency. The out of channel emission is specified relative to the RRC filtered mean power of the UE carrier.

4.2.3.2 Limits

The power of any UE emission shall not exceed the levels specified in table 4. The requirements are applicable for all for the values of β_c , β_d , β_{hs} , β_{ec} and β_{ed} defined in TS 125 214 [14].

Table 4: Spectrum emission mask requirement

Δf in MHz (note 1)	Minimum requirement (note 2)		Measurement bandwidth (note 5)
	Relative requirement	Absolute requirement (in measurement band width)	
2,5 MHz to 3,5 MHz	$-33,5 - 15 \cdot \left(\frac{\Delta f}{\text{MHz}} - 2,5 \right) \text{ dBc}$	-69,6 dBm	30 kHz (see note 3)
3,5 MHz to 7,5 MHz	$\left\{ -33,5 - 1 \cdot \left(\frac{\Delta f}{\text{MHz}} - 3,5 \right) \right\} \text{ dBc}$	-54,3 dBm	1 MHz (see note 4)
7,5 MHz to 8,5 MHz	$-37,5 - 10 \cdot \left(\frac{\Delta f}{\text{MHz}} - 7,5 \right) \text{ dBc}$	-54,3 dBm	1 MHz (see note 4)
8,5 MHz to 12,5 MHz	-47,5 dBc	-54,3 dBm	1 MHz (see note 4)

NOTE 1: Δf is the separation between the carrier frequency and the centre of the measurement bandwidth.
 NOTE 2: The minimum requirement is calculated from the relative requirement or the absolute requirement, whichever is the higher power.
 NOTE 3: The first and last measurement position with a 30 kHz filter is at Δf equals to 2,515 MHz and 3,485 MHz.
 NOTE 4: The first and last measurement position with a 1 MHz filter is at Δf equals to 4 MHz and 12 MHz.
 NOTE 5: As a general rule, the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity and efficiency, the resolution bandwidth may be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.

4.2.3.3 Conformance

Conformance tests described in clause 5.3.2 shall be carried out.

4.2.4 Transmitter spurious emissions

4.2.4.1 Definition

Spurious emissions are emissions, which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

The technical requirements in the present document apply for UEs supporting E-UTRA FDD in declared operating bands. The technical requirements for HSDPA and E-DCH apply only to UEs supporting these features. UEs supporting E-UTRA FDD shall fulfil requirements in EN 301 908-13 [11].

4.2.2 Transmitter maximum output power

4.2.2.1 Definition

The nominal maximum output power and its tolerance are defined according to the power class of the UE.

The nominal power defined is the broadband transmit power of the UE, i.e. the power in a bandwidth of at least $(1 + \alpha)$ times the chip rate of the radio access mode. The period of measurement shall be at least one timeslot.

4.2.2.2 Limits

The UE maximum output power shall be within the shown value in table [4.2.2.2-1](#) even for the multi-code DPDCH transmission mode.

Table 4.2.2.2-1: UE power classes

<u>Operating Band</u>	Power Class 3		Power Class 3bis		Power Class 4	
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)
Band I	+24	+1,7/-3,7			+21	+2,7/-2,7
Band III	+24	+1,7/-3,7			+21	+2,7/-2,7
Band VII	+24	+1,7/-3,7	+23	+2,7/-2,7	+21	+2,7/-2,7
Band VIII	+24	+1,7/-3,7	+23	+2,7/-2,7	+21	+2,7/-2,7
<u>Band XV</u>	<u>+24</u>	<u>+1,7/-3,7</u>	<u>+23</u>	<u>+2,7/-1,7</u>	<u>+21</u>	<u>+2,7/-1,7</u>
<u>Band XVI</u>	<u>+24</u>	<u>+1,7/-3,7</u>	<u>+23</u>	<u>+2,7/-1,7</u>	<u>+21</u>	<u>+2,7/-1,7</u>

NOTE: These requirements do not take into account the maximum power reduction allowed to the UE in the presence of HS-DPCCH and E-DCH specified in TS 125 101 [5].

4.2.2.3 Conformance

Conformance tests described in clause 5.3.1 shall be carried out.

4.2.3 Transmitter spectrum emission mask

4.2.3.1 Definition

The spectrum emission mask of the UE applies to frequencies, which are between 2,5 MHz and 12,5 MHz away from the UE centre carrier frequency. The out of channel emission is specified relative to the RRC filtered mean power of the UE carrier.

4.2.4.2 Limits

The power of spurious emissions shall not exceed the limits defined in tables ~~5~~ and ~~6~~. The limits shown in tables ~~5~~ and ~~6~~ are only applicable for frequencies, which are greater than 12,5 MHz away from the UE centre carrier frequency.

Table ~~5~~: General spurious emissions requirements

Frequency bandwidth	Measurement bandwidth	Minimum requirement
9 kHz \leq f < 150 kHz	1 kHz	-36 dBm
150 kHz \leq f < 30 MHz	10 kHz	-36 dBm
30 MHz \leq f < 1 000 MHz	100 kHz	-36 dBm
1 GHz \leq f < 12,75 GHz	1 MHz	-30 dBm

Table ~~6~~: Additional spurious emissions requirements

Operating band	Frequency bandwidth	Measurement bandwidth	Minimum requirement
+	921 MHz \leq f < 925 MHz	100 kHz	-60 dBm (note 1)
	925 MHz \leq f \leq 935 MHz	100 kHz	-67 dBm (note 1)
	935 MHz < f \leq 960 MHz	100 kHz	-79 dBm (note 1)
	1 805 MHz \leq f \leq 1 880 MHz	100 kHz	-71 dBm (note 1)
	2 110 MHz \leq f \leq 2 170 MHz	3,84 MHz	-60 dBm
	2 620 MHz \leq f \leq 2 690 MHz	3,84 MHz	-60 dBm
H	921 MHz \leq f < 925 MHz	100 kHz	-60 dBm (note 1)
	925 MHz \leq f \leq 935 MHz	100 kHz	-67 dBm (note 1)
	935 MHz < f \leq 960 MHz	100 kHz	-79 dBm (note 1)
	1 805 MHz \leq f \leq 1 880 MHz	3,84 MHz	-60 dBm
	2 110 MHz \leq f \leq 2 170 MHz	3,84 MHz	-60 dBm
	2 620 MHz \leq f \leq 2 690 MHz	3,84 MHz	-60 dBm
VH	921 MHz \leq f < 925 MHz	100 kHz	-60 dBm (note 1)
	925 MHz \leq f \leq 935 MHz	100 kHz	-67 dBm (note 1)
	935 MHz < f \leq 960 MHz	100 kHz	-79 dBm (note 1)
	1 805 MHz \leq f \leq 1 880 MHz	100 kHz	-71 dBm (note 1)
	2 110 MHz \leq f \leq 2 170 MHz	3,84 MHz	-60 dBm
	2 620 MHz \leq f \leq 2 690 MHz	3,84 MHz	-60 dBm
VHH	921 MHz \leq f < 925 MHz	100 kHz	-60 dBm (note 1)
	925 MHz \leq f \leq 935 MHz	100 kHz	-67 dBm (note 1)
	935 MHz < f \leq 960 MHz	100 kHz	-79 dBm (note 1)
	1 805 MHz \leq f \leq 1 880 MHz	100 kHz	-71 dBm (note 1)
	2 110 MHz \leq f \leq 2 170 MHz	3,84 MHz	-60 dBm
	2 620 MHz \leq f \leq 2 690 MHz	3,84 MHz	-60 dBm
	2 590 MHz \leq f \leq 2 620 MHz	3,84 MHz	-50 dBm
	2 640 MHz \leq f \leq 2 690 MHz	3,84 MHz	-60 dBm (note 2)
VHH	925 MHz \leq f \leq 935 MHz	100 kHz 3,84 MHz	-67 dBm (note 1) -60 dBm
	935 MHz < f \leq 960 MHz	100 kHz 3,84 MHz	-79 dBm (note 1) -60 dBm
	1 805 MHz < f \leq 1 830 MHz	100 kHz 3,84 MHz	-71 dBm (notes 1 and 2) -60 dBm (note 2)
	1 830 MHz < f \leq 1 880 MHz	100 kHz 3,84 MHz	-71 dBm (note 1) -60 dBm
	2 110 MHz \leq f \leq 2 170 MHz	3,84 MHz	-60 dBm
	2 620 MHz \leq f \leq 2 640 MHz	3,84 MHz	-60 dBm
	2 640 MHz \leq f \leq 2 690 MHz	3,84 MHz	-60 dBm (note 2)
	2 640 MHz \leq f \leq 2 690 MHz	3,84 MHz	-60 dBm (note 2)

NOTE 1: The measurements are made on frequencies which are integer multiples of 200 kHz. As exceptions, up to five measurements with a level up to the applicable requirements defined in table ~~5~~ are permitted for each UARFCN used in the measurement.

NOTE 2: The measurements are made on frequencies which are integer multiples of 200 kHz. As exceptions, measurements with a level up to the applicable requirements defined in table ~~5~~ are permitted for each UARFCN used in the measurement due to 2nd or 3rd harmonic spurious emissions.

4.2.4.3 Conformance

Conformance tests described in clause 5.3.3 shall be carried out.

4.2.3.2 Limits

The power of any UE emission shall not exceed the levels specified in table 4.2.3.2-1. The requirements are applicable for all for the values of β_c , β_d , β_{hs} , β_{ec} and β_{ed} defined in TS 125 214 [8].

Table 4.2.3.2-1: Spectrum emission mask requirement

Δf in MHz (note 1)	Minimum requirement (note 2)		Measurement bandwidth (note 5)
	Relative requirement	Absolute requirement (in measurement bandwidth)	
2,5 MHz to 3,5 MHz	$\left\{ -33,5 - 15 \cdot \left(\frac{\Delta f}{\text{MHz}} - 2,5 \right) \right\} \text{dBc}$	-69,6 dBm	30 kHz (see note 3)
3,5 MHz to 7,5 MHz	$\left\{ -33,5 - 1 \cdot \left(\frac{\Delta f}{\text{MHz}} - 3,5 \right) \right\} \text{dBc}$	-54,3 dBm	1 MHz (see note 4)
7,5 MHz to 8,5 MHz	$\left\{ -37,5 - 10 \cdot \left(\frac{\Delta f}{\text{MHz}} - 7,5 \right) \right\} \text{dBc}$	-54,3 dBm	1 MHz (see note 4)
8,5 MHz to 12,5 MHz	-47,5 dBc	-54,3 dBm	1 MHz (see note 4)

NOTE 1: Δf is the separation between the carrier frequency and the centre of the measurement bandwidth.
 NOTE 2: The minimum requirement is calculated from the relative requirement or the absolute requirement, whichever is the higher power.
 NOTE 3: The first and last measurement position with a 30 kHz filter is at Δf equals to 2,515 MHz and 3,485 MHz.
 NOTE 4: The first and last measurement position with a 1 MHz filter is at Δf equals to 4 MHz and 12 MHz.
 NOTE 5: As a general rule, the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity and efficiency, the resolution bandwidth may be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.

4.2.3.3 Conformance

Conformance tests described in clause 5.3.2 shall be carried out.

4.2.4 Transmitter spurious emissions

4.2.4.1 Definition

Spurious emissions are emissions, which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

4.2.4.2 Limits

The power of spurious emissions shall not exceed the limits defined in tables 4.2.4.2-1 and 4.2.4.2-2. The limits shown in tables 4.2.4.2-1 and 4.2.4.2-2 are only applicable for frequencies, which are greater than 12,5 MHz away from the UE centre carrier frequency.

Table 4.2.4.2-1: General spurious emissions requirements

Frequency bandwidth	Measurement bandwidth	Minimum requirement
9 kHz $\leq f < 150$ kHz	1 kHz	-36 dBm
150 kHz $\leq f < 30$ MHz	10 kHz	-36 dBm
30 MHz $\leq f < 1 000$ MHz	100 kHz	-36 dBm
1 GHz $\leq f < 12,75$ GHz	1 MHz	-30 dBm

4.2.5 Transmitter minimum output power

4.2.5.1 Definition

The minimum controlled output power of the UE is when the power is set to a minimum value. The minimum transmit power is defined as a mean power in one time slot.

4.2.5.2 Limits

The minimum output power shall be less than -49 dBm.

4.2.5.3 Conformance

Conformance tests described in clause 5.3.4 shall be carried out.

4.2.6 Receiver Adjacent Channel Selectivity (ACS)

4.2.6.1 Definition

Adjacent Channel Selectivity (ACS) is a measure of a receiver's ability to receive a WCDMA signal at its assigned channel frequency in the presence of an adjacent channel signal at a given frequency offset from the centre frequency of the assigned channel. ACS is the ratio of the receive filter attenuation on the assigned channel frequency to the receive filter attenuation on the adjacent channel(s).

4.2.6.2 Limits

For the UE of power class 3 and 4, the BER shall not exceed 0,001 for the parameters specified in table 7. This test condition is equivalent to the ACS value 33 dB.

Table 7: Test parameters for adjacent channel selectivity

Parameter	Unit	Case 1	Case 2
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 14 dB	<REFSENS> + 41 dB
I _{or}	dBm/3,84 MHz	<REFI _{or} > + 14 dB	<REFI _{or} > + 41 dB
I _{oac} mean power (modulated)	dBm	-52	-25
F _{uw} (offset)	MHz	+5 or -5	+5 or -5
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)	20 (for Power class 3) 18 (for Power class 4)
NOTE 1: <REFSENS> and <REFI _{or} > as specified in TS 125 101 [11] .			
NOTE 2: The I _{oac} (modulated) signal consists of the common channels and the 16 dedicated data channels as specified in TS 125 101 [11] .			

4.2.6.3 Conformance

Conformance tests described in clause 5.3.5 shall be carried out.

Table 4.2.4.2-2: Additional spurious emissions requirements

Operating band	Frequency bandwidth	Measurement bandwidth	Minimum requirement
<u>I</u>	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm (note 1)
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm (note 1)
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm (note 1)
	1 805 MHz ≤ f ≤ 1 880 MHz	100 kHz	-71 dBm (note 1)
	2 110 MHz ≤ f ≤ 2 170 MHz	3,84 MHz	-60 dBm
	2 585 MHz ≤ f ≤ 2 690 MHz	3,84 MHz	-60 dBm
<u>III</u>	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm (note 1)
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm (note 1)
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm (note 1)
	1 805 MHz ≤ f ≤ 1 880 MHz	3,84 MHz	-60 dBm
	2 110 MHz ≤ f ≤ 2 170 MHz	3,84 MHz	-60 dBm
	2 585 MHz ≤ f ≤ 2 690 MHz	3,84 MHz	-60 dBm
<u>VII</u>	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm (note 1)
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm (note 1)
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm (note 1)
	1 805 MHz ≤ f ≤ 1 880 MHz	100 kHz	-71 dBm (note 1)
	2 110 MHz ≤ f ≤ 2 170 MHz	3,84 MHz	-60 dBm
	2 620 MHz ≤ f ≤ 2 690 MHz	3,84 MHz	-60 dBm
	2 590 MHz ≤ f ≤ 2 620 MHz	3,84 MHz	-50 dBm
<u>VIII</u>	925 MHz ≤ f ≤ 935 MHz	100 kHz 3,84 MHz	-67 dBm (note 1) -60 dBm
	935 MHz < f ≤ 960 MHz	100 kHz 3,84 MHz	-79 dBm (note 1) -60 dBm
	1 805 MHz < f ≤ 1 830 MHz	100 kHz 3,84 MHz	-71 dBm (notes 1 and 2) -60 dBm (note 2)
	1 830 MHz < f ≤ 1 880 MHz	100 kHz 3,84 MHz	-71 dBm (note 1) -60 dBm
	2 110 MHz ≤ f ≤ 2 170 MHz	3,84 MHz	-60 dBm
	2 585 MHz ≤ f ≤ 2 640 MHz	3,84 MHz	-60 dBm
	2 640 MHz ≤ f ≤ 2 690 MHz	3,84 MHz	-60 dBm (note 2)
	<u>XV</u>	<u>921 MHz ≤ f < 925 MHz</u>	<u>100 kHz</u>
<u>925 MHz ≤ f ≤ 935 MHz</u>	<u>100 kHz</u> <u>3,84 MHz</u>	<u>-67 dBm (note 1)</u> <u>-60 dBm</u>	
<u>935 MHz < f < 960 MHz</u>	<u>100 kHz</u>	<u>-79 dBm (note 1)</u>	
<u>1 805 MHz ≤ f < 1 880 MHz</u>	<u>100 kHz</u>	<u>-71 dBm (note 1)</u>	
<u>2 110 MHz ≤ f < 2 170 MHz</u>	<u>3,84 MHz</u>	<u>-60 dBm</u>	
<u>2 585 MHz ≤ f < 2 620 MHz</u>	<u>3,84 MHz</u>	<u>-50 dBm</u>	
<u>2 620 MHz ≤ f < 2 690 MHz</u>	<u>3,84 MHz</u>	<u>-60 dBm</u>	
<u>XVI</u>	<u>921 MHz ≤ f < 925 MHz</u>	<u>100 kHz</u>	<u>-60 dBm (note 1)</u>
	<u>925 MHz ≤ f < 935 MHz</u>	<u>100 kHz</u> <u>3,84 MHz</u>	<u>-67 dBm (note 1)</u> <u>-60 dBm</u>
	<u>935 MHz ≤ f < 960 MHz</u>	<u>100 kHz</u>	<u>-79 dBm (note 1)</u>
	<u>1 805 MHz ≤ f < 1 880 MHz</u>	<u>100 kHz</u>	<u>-71 dBm (note 1)</u>
	<u>2 110 MHz ≤ f < 2 170 MHz</u>	<u>3,84 MHz</u>	<u>-60 dBm</u>
	<u>2 585 MHz ≤ f < 2 620 MHz</u>	<u>3,84 MHz</u>	<u>-50 dBm</u>
	<u>2 620 MHz ≤ f < 2 690 MHz</u>	<u>3,84 MHz</u>	<u>-60 dBm</u>

NOTE 1: The measurements are made on frequencies which are integer multiples of 200 kHz. As exceptions, up to five measurements with a level up to the applicable requirements defined in table 4.2.4.2-1 are permitted for each UARFCN used in the measurement.

NOTE 2: The measurements are made on frequencies which are integer multiples of 200 kHz. As exceptions, measurements with a level up to the applicable requirements defined in table 4.2.4.2-1 are permitted for each UARFCN used in the measurement due to 2nd or 3rd harmonic spurious emissions.

4.2.4.3 Conformance

Conformance tests described in clause 5.3.3 shall be carried out.

4.2.7 Receiver blocking characteristics

4.2.7.1 Definition

The blocking characteristic is a measure of the receiver's ability to receive a wanted signal at its assigned channel frequency in the presence of an unwanted interferer on frequencies other than those of the spurious response or the adjacent channels, without this unwanted input signal causing a degradation of the performance of the receiver beyond a specified limit. The blocking performance shall apply at all frequencies except those at which a spurious response occur.

4.2.7.2 Limits

The BER shall not exceed 0,001 for the parameters specified in tables ~~8 and 9. For tables 9~~ up to 24 exceptions are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size.

Table 8: Test parameters for in-band blocking characteristics

Parameter	Unit	Level	
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 3 dB	
I _{or}	dBm/3,84 MHz	<REFI _{or} > + 3 dB	
I _{blocking} mean power (modulated)	dBm	-56 (for F _{uw} offset ±10 MHz)	-44 (for F _{uw} offset ±15 MHz)
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)	
NOTE 1: <REFSENS> and <REFI _{or} > as specified in TS 125 101 [11].			
NOTE 2: The I _{blocking} (modulated) signal consists of the common channels and the 16 dedicated data channels as specified in TS 125 101 [11].			

Table 9: Test parameters for out-of-band blocking characteristics

Parameter	Unit	Frequency range 1	Frequency range 2	Frequency range 3
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 3 dB	<REFSENS> + 3 dB	<REFSENS> + 3 dB
I _{or}	dBm/3,84 MHz	<REFI _{or} > + 3 dB	<REFI _{or} > + 3 dB	<REFI _{or} > + 3 dB
I _{blocking} (CW)	dBm	-44	-30	-15
F _{uw} (Band I operation)	MHz	2 050 < f < 2 095 2 185 < f < 2 230	2 025 < f ≤ 2 050 2 230 ≤ f < 2 255	1 < f ≤ 2 025 2 255 ≤ f < 12 750
F _{uw} (Band III operation)	MHz	1 745 < f < 1 790 1 895 < f < 1 940	1 720 < f ≤ 1 745 1 940 ≤ f < 1 965	1 < f ≤ 1 720 1 965 ≤ f < 12 750
F _{uw} (Band VII operation)	MHz	2 570 < f < 2 605 2 705 < f < 2 750	Na 2 750 ≤ f < 2 775	1 < f ≤ 2570 2 775 ≤ f < 12 750
F _{uw} (Band VIII operation)	MHz	865 < f < 910 975 < f < 1 020	840 < f < 865 1 020 ≤ f < 1 045	1 < f ≤ 840 1 045 ≤ f < 12 750
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)		
Band I operation	For 2 095 MHz ≤ f ≤ 2 185 MHz, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 8 shall be applied.			
Band III operation	For 1 790 MHz ≤ f ≤ 1 895 MHz, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 8 shall be applied.			
Band VII operation	For 2 605 MHz ≤ f ≤ 2 705 MHz, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 8 shall be applied.			
Band VIII operation	For 910 MHz ≤ f ≤ 975 MHz, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 8 shall be applied.			
NOTE: <REFSENS> and <REFI _{or} > as specified in TS 125 101 [11].				

4.2.5 Transmitter minimum output power

4.2.5.1 Definition

The minimum controlled output power of the UE is when the power is set to a minimum value. The minimum transmit power is defined as a mean power in one time slot.

4.2.5.2 Limits

The minimum output power shall be less than -49 dBm.

4.2.5.3 Conformance

Conformance tests described in clause 5.3.4 shall be carried out.

4.2.6 Receiver Adjacent Channel Selectivity (ACS)

4.2.6.1 Definition

Adjacent Channel Selectivity (ACS) is a measure of a receiver's ability to receive a WCDMA signal at its assigned channel frequency in the presence of an adjacent channel signal at a given frequency offset from the centre frequency of the assigned channel. ACS is the ratio of the receive filter attenuation on the assigned channel frequency to the receive filter attenuation on the adjacent channel(s).

4.2.6.2 Limits

For the UE of power class 3 and 4, the BER shall not exceed 0,001 for the parameters specified in table [4.2.6.2-1](#). This test condition is equivalent to the ACS value 33 dB.

Table 4.2.6.2-1: Test parameters for adjacent channel selectivity

Parameter	Unit	Case 1	Case 2
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 14 dB	<REFSENS> + 41 dB
I _{or}	dBm/3,84 MHz	<REFI _{or} > + 14 dB	<REFI _{or} > + 41 dB
I _{oac} mean power (modulated)	dBm	-52	-25
F _{uw} (offset)	MHz	+5 or -5	+5 or -5
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)	20 (for Power class 3) 18 (for Power class 4)
NOTE 1: <REFSENS> and <REFI _{or} > as specified in TS 134 121-1 [2] .			
NOTE 2: The I _{oac} (modulated) signal consists of the common channels and the 16 dedicated data channels as specified in TS 125 101 [5] .			

4.2.6.3 Conformance

Conformance tests described in clause 5.3.5 shall be carried out.

Table 9A: Test parameters for narrow band blocking

Parameter	Unit	Band III, VIII
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 10 dB
I _{or}	dBm/3,84 MHz	<REFI _{or} > + 10 dB
I _{blocking} (GMSK)	dBm	-56
F _{uw} (offset)	MHz	2,8
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)
NOTE 1: <REFSENS> and <REFI _{or} > as specified in TS 125 101 [11] .		
NOTE 2: I _{blocking} (GMSK) is an interfering signal as defined in TS 145 004 [45] . It is a continuous GMSK modulated carrier following the structure of the GSM signals, but with all modulating bits (including the midamble period) derived directly from a random or any pseudo random data stream.		

4.2.7.3 Conformance

Conformance tests described in clause 5.3.6 shall be carried out.

4.2.8 Receiver spurious response

4.2.8.1 Definition

Spurious response is a measure of the receiver's ability to receive a wanted signal on its assigned channel frequency without exceeding a given degradation due to the presence of an unwanted CW interfering signal at any other frequency at which a response is obtained i.e. for which the out-of-band blocking limit as specified in table ~~9~~ is not met.

4.2.8.2 Limits

The BER shall not exceed 0,001 for the parameters specified in table ~~10~~.

Table 10: Test parameters for spurious response

Parameter	Level	Unit
DPCH_Ec	<REFSENS> +3 dB	dBm / 3,84 MHz
I _{or}	<REFI _{or} > +3 dB	dBm / 3,84 MHz
I _{blocking} (CW)	-44	dBm
F _{uw}	Spurious response frequencies	MHz
UE transmitted mean power	20 (for Power class 3) 18 (for Power class 4)	dBm
NOTE: <REFSENS> and <REFI _{or} > as specified in TS 125 101 [11] .		

4.2.8.3 Conformance

Conformance tests described in clause 5.3.7 shall be carried out.

4.2.9 Receiver intermodulation characteristics

4.2.9.1 Definition

Third and higher order mixing of the two interfering RF signals can produce an interfering signal in the band of the desired channel. Intermodulation response rejection is a measure of the capability of the receiver to receive a wanted signal on its assigned channel frequency in the presence of two or more interfering signals which have a specific frequency relationship to the wanted signal.

4.2.7 Receiver blocking characteristics

4.2.7.1 Definition

The blocking characteristic is a measure of the receiver's ability to receive a wanted signal at its assigned channel frequency in the presence of an unwanted interferer on frequencies other than those of the spurious response or the adjacent channels, without this unwanted input signal causing a degradation of the performance of the receiver beyond a specified limit. The blocking performance shall apply at all frequencies except those at which a spurious response occur.

4.2.7.2 Limits

The BER shall not exceed 0,001 for the parameters specified in tables 4.2.7.2-1 and 4.2.7.2-2. For table 4.2.7.2-2 up to 24 exceptions are allowed for spurious response frequencies in each assigned frequency channel when measured using a 1 MHz step size.

Table 4.2.7.2-1: Test parameters for in-band blocking characteristics

Parameter	Unit	Level	
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 3 dB	
I _{or}	dBm/3,84 MHz	<REFI _{or} > + 3 dB	
I _{blocking} mean power (modulated)	dBm	-56 (for F _{uw} offset ±10 MHz)	-44 (for F _{uw} offset ±15 MHz)
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)	
NOTE 1: <REFSENS> and <REFI _{or} > as specified in TS 134 121-1 [2].			
NOTE 2: The I _{blocking} (modulated) signal consists of the common channels and the 16 dedicated data channels as specified in TS 125 101 [5].			

Table 4.2.7.2-2: Test parameters for out-of-band blocking characteristics

Parameter	Unit	Frequency range 1	Frequency range 2	Frequency range 3
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 3 dB	<REFSENS> + 3 dB	<REFSENS> + 3 dB
I _{or}	dBm/3,84 MHz	<REFI _{or} > + 3 dB	<REFI _{or} > + 3 dB	<REFI _{or} > + 3 dB
I _{blocking} (CW)	dBm	-44	-30	-15
F _{uw} (Band I operation)	MHz	2 050 < f < 2 095 2 185 < f < 2 230	2 025 < f ≤ 2 050 2 230 ≤ f < 2 255	1 < f ≤ 2 025 2 255 ≤ f < 12 750
F _{uw} (Band III operation)	MHz	1 745 < f < 1 790 1 895 < f < 1 940	1 720 < f ≤ 1 745 1 940 ≤ f < 1 965	1 < f ≤ 1 720 1 965 ≤ f < 12 750
F _{uw} (Band VII operation)	MHz	2 570 < f < 2 605 2 705 < f < 2 750	Na 2 750 ≤ f < 2 775	1 < f ≤ 2 570 2 775 ≤ f < 12 750
F _{uw} (Band VIII operation)	MHz	865 < f < 910 975 < f < 1 020	840 < f < 865 1 020 ≤ f < 1 045	1 < f ≤ 840 1 045 ≤ f < 12 750
F _{uw} (Band XV operation)	MHz	2 570 < f < 2 585 2 705 < f < 2 750	Na 2 750 < f < 2 775	1 < f < 2 570 2 775 < f < 12 750
F _{uw} (Band XVI operation)	MHz	Na 2 705 < f < 2 750	2 500 < f < 2 570 2 750 < f < 2 775	1 < f < 2 500 2 775 ≤ f < 12 750
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)		
Band I operation	For 2 095 MHz ≤ f ≤ 2 185 MHz, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 4.2.7.2-1 shall be applied.			
Band III operation	For 1 790 MHz ≤ f ≤ 1 895 MHz, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 4.2.7.2-1 shall be applied.			

4.2.9.2 Limits

The BER shall not exceed 0,001 for the parameters specified in table ~~11~~.

~~Table 11:~~ Receive intermodulation characteristics

Parameter	Level		Unit
DPCH_Ec	<REFSENS> + 3 dB		dBm 3,84 MHz
\hat{I}_{or}	<REF \hat{I}_{or} > + 3 dB		dBm 3,84 MHz
I_{ouw1} (CW)	-46		dBm
I_{ouw2} mean power (modulated)	-46		dBm
F_{uw1} (offset)	10	-10	MHz
F_{uw2} (offset)	20	-20	MHz
UE transmitted mean power	20 (for Power class 3) 18 (for Power class 4)		dBm
NOTE 1: I_{ouw2} (modulated) consists of the common channels and the 16 dedicated data channels as specified in TS 125 101 [11].			
NOTE 2: <REFSENS> and <REF \hat{I}_{or} > as specified in TS 125 101 [11] .			

~~Table 11A:~~ Test parameters for narrow band intermodulation characteristics

Parameter	Unit	Band III, VIII	
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 10 dB	
\hat{I}_{or}	dBm/3,84 MHz	<REF \hat{I}_{or} > +10 dB	
I_{ouw1} (CW)	dBm	-43	
I_{ouw2} (GMSK)	dBm	-43	
F_{uw1} (offset)	MHz	3,6	-3,6
F_{uw2} (offset)	MHz	6,0	-6,0
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)	
NOTE 1: <REFSENS> and <REF \hat{I}_{or} > as specified in TS 125 101 [11] .			
NOTE 2: I_{ouw2} (GMSK) is an interfering signal as defined in TS 145 004 [15]. It is a continuous GMSK modulated carrier following the structure of the GSM signals, but with all modulating bits (including the midamble period) derived directly from a random or any pseudo random data stream.			

4.2.9.3 Conformance

Conformance tests described in clause 5.3.8 shall be carried out.

4.2.10 Receiver spurious emissions

4.2.10.1 Definition

The spurious emissions power is the power of emissions, generated or amplified in a receiver, which appear at the UE antenna connector. The requirements in UE transmit bands are valid in URA_PCH, Cell_PCH and idle state.

4.2.10.2 Limits

The power of any narrow band CW spurious emission shall not exceed the maximum level specified in tables ~~12~~ and ~~13~~.

~~Table 12:~~ General receiver spurious emission requirements

Frequency band	Measurement bandwidth	Maximum level
$30 \text{ MHz} \leq f < 1 \text{ GHz}$	100 kHz	-57 dBm
$1 \text{ GHz} \leq f \leq 12,75 \text{ GHz}$	1 MHz	-47 dBm

Parameter	Unit	Frequency range 1	Frequency range 2	Frequency range 3
Band VII operation		For $2\,605\text{ MHz} \leq f \leq 2\,705\text{ MHz}$, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 4.2.7.2-1 shall be applied.		
Band VIII operation		For $910\text{ MHz} \leq f \leq 975\text{ MHz}$, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 4.2.7.2-1 shall be applied.		
Band XV operation		For $2\,585 < f < 2\,705\text{ MHz}$, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 4.2.7.2-1 shall be applied.		
Band XVI operation		For $2\,570 < f < 2\,705\text{ MHz}$, the appropriate in-band blocking or adjacent channel selectivity in clause 4.2.6 and table 4.2.7.2-1 shall be applied.		
NOTE:	<REFSENS> and <REF _{or} > as specified in TS 134 121-1 [2].			

Table 4.2.7.2-3: Test parameters for narrow band blocking

Parameter	Unit	Band III, VIII
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 10 dB
I _{or}	dBm/3,84 MHz	<REF _{or} > + 10 dB
I _{blocking} (GMSK)	dBm	-56
F _{uw} (offset)	MHz	2,8
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)
NOTE 1: <REFSENS> and <REF _{or} > as specified in TS 134 121-1 [2].		
NOTE 2: I _{blocking} (GMSK) is an interfering signal as defined in TS 145 004 [9]. It is a continuous GMSK modulated carrier following the structure of the GSM signals, but with all modulating bits (including the midamble period) derived directly from a random or any pseudo random data stream.		

4.2.7.3 Conformance

Conformance tests described in clause 5.3.6 shall be carried out.

4.2.8 Receiver spurious response

4.2.8.1 Definition

Spurious response is a measure of the receiver's ability to receive a wanted signal on its assigned channel frequency without exceeding a given degradation due to the presence of an unwanted CW interfering signal at any other frequency at which a response is obtained i.e. for which the out-of-band blocking limit as specified in table 4.2.7.2-2 is not met.

4.2.8.2 Limits

The BER shall not exceed 0,001 for the parameters specified in table 4.2.8.2-1.

Table 4.2.8.2-1: Test parameters for spurious response

Parameter	Level	Unit
DPCH_Ec	<REFSENS> + 3 dB	dBm/3,84 MHz
I _{or}	<REF _{or} > + 3 dB	dBm/3,84 MHz
I _{blocking} (CW)	-44	dBm
F _{uw}	Spurious response frequencies	MHz
UE transmitted mean power	20 (for Power class 3) 18 (for Power class 4)	dBm
NOTE:	<REFSENS> and <REF _{or} > as specified in TS 134 121-1 [2].	

4.2.8.3 Conformance

Conformance tests described in clause 5.3.7 shall be carried out.

Table 13: Additional receiver spurious emission requirements

Band	Frequency Band	Measurement Bandwidth	Maximum level
I	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm (see note)
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm (see note)
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm (see note)
	1 805 MHz ≤ f ≤ 1 880 MHz	100 kHz	-71 dBm (see note)
	1 920 MHz ≤ f ≤ 1 980 MHz	3,84 MHz	-60 dBm
	2 110 MHz ≤ f ≤ 2 170 MHz	3,84 MHz	-60 dBm
III	2 620 MHz ≤ f ≤ 2 690 MHz	3,84 MHz	-60 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm (see note)
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm (see note)
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm (see note)
	1 710 MHz ≤ f ≤ 1 785 MHz	3,84 MHz	-60 dBm
	1 805 MHz ≤ f ≤ 1 880 MHz	3,84 MHz	-60 dBm
VII	2 110 MHz ≤ f ≤ 2 170 MHz	3,84 MHz	-60 dBm
	2 500 MHz ≤ f ≤ 2 570 MHz	3,84 MHz	-60 dBm
	2 620 MHz ≤ f ≤ 2 690 MHz	3,84 MHz	-60 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm (see note)
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm (see note)
	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm (see note)
VIII	1 805 MHz ≤ f ≤ 1 880 MHz	100 kHz	-71 dBm (see note)
	2 110 MHz ≤ f ≤ 2 170 MHz	3,84 MHz	-60 dBm
	2 620 MHz ≤ f ≤ 2 690 MHz	3,84 MHz	-60 dBm
	880 MHz ≤ f ≤ 915 MHz	3,84 MHz	-60 dBm
	921 MHz ≤ f < 925 MHz	100 kHz	-60 dBm (see note)
	925 MHz ≤ f ≤ 935 MHz	100 kHz	-67 dBm (see note)
NOTE:	935 MHz < f ≤ 960 MHz	100 kHz	-79 dBm (see note)
	1 805 MHz ≤ f ≤ 1 880 MHz	3,84 MHz	-60 dBm
	2 110 MHz ≤ f ≤ 2 170 MHz	3,84 MHz	-60 dBm
	2 620 MHz ≤ f ≤ 2 690 MHz	3,84 MHz	-60 dBm
	The measurements are made on frequencies which are integer multiples of 200 kHz. As exceptions, up to five measurements with a level up to the applicable requirements defined in table 42 are permitted for each UARFCN used in the measurement.		

4.2.10.3 Conformance

Conformance tests described in clause 5.3.9 shall be carried out.

4.2.11 Out-of-synchronization handling of output power

4.2.11.1 Definition

The UE shall monitor the DPCCCH quality in order to detect a loss of the signal on Layer 1. The threshold Q_{out} specifies at what DPCCCH quality levels the UE shall shut its power off. The threshold is not defined explicitly, but is defined by the conditions under which the UE shall shut its transmitter off, as stated in this clause.

The DPCCCH quality shall be monitored in the UE and compared to the threshold Q_{out} for the purpose of monitoring synchronization. The threshold Q_{out} should correspond to a level of DPCCCH quality where no reliable detection of the TPC commands transmitted on the downlink DPCCCH can be made. This can be at a TPC command error ratio level of e.g. 20 %.

4.2.11.2 Limits

When the UE estimates the DPCCCH quality over the last 160 ms period to be worse than a threshold Q_{out} , the UE shall shut its transmitter off within 40 ms.

4.2.9 Receiver intermodulation characteristics

4.2.9.1 Definition

Third and higher order mixing of the two interfering RF signals can produce an interfering signal in the band of the desired channel. Intermodulation response rejection is a measure of the capability of the receiver to receive a wanted signal on its assigned channel frequency in the presence of two or more interfering signals which have a specific frequency relationship to the wanted signal.

4.2.9.2 Limits

The BER shall not exceed 0,001 for the parameters specified in table [4.2.9.2-1](#).

Table 4.2.9.2-1: Receive intermodulation characteristics

Parameter	Level		Unit
DPCH_Ec	<REFSENS> + 3 dB		<u>dBm/3,84 MHz</u>
I_{or}	<REF I_{or} > + 3 dB		<u>dBm/3,84 MHz</u>
I_{ouw1} (CW)	-46		dBm
I_{ouw2} mean power (modulated)	-46		dBm
F_{uw1} (offset)	10	-10	MHz
F_{uw2} (offset)	20	-20	MHz
UE transmitted mean power	20 (for Power class 3) 18 (for Power class 4)		dBm
NOTE 1: I_{ouw2} (modulated) consists of the common channels and the 16 dedicated data channels as specified in TS 125 101 [5].			
NOTE 2: <REFSENS> and <REF I_{or} > as specified in TS 134 121-1 [2].			

Table 4.2.9.2-2: Test parameters for narrow band intermodulation characteristics

Parameter	Unit	Band III, VIII	
DPCH_Ec	dBm/3,84 MHz	<REFSENS> + 10 dB	
I_{or}	dBm/3,84 MHz	<REF I_{or} > + 10 dB	
I_{ouw1} (CW)	dBm	-43	
I_{ouw2} (GMSK)	dBm	-43	
F_{uw1} (offset)	MHz	3,6	-3,6
F_{uw2} (offset)	MHz	6,0	-6,0
UE transmitted mean power	dBm	20 (for Power class 3) 18 (for Power class 4)	
NOTE 1: <REFSENS> and <REF I_{or} > as specified in TS 134 121-1 [2].			
NOTE 2: I_{ouw2} (GMSK) is an interfering signal as defined in TS 145 004 [9]. It is a continuous GMSK modulated carrier following the structure of the GSM signals, but with all modulating bits (including the midamble period) derived directly from a random or any pseudo random data stream.			

4.2.9.3 Conformance

Conformance tests described in clause 5.3.8 shall be carried out.

4.2.10 Receiver spurious emissions

4.2.10.1 Definition

The spurious emissions power is the power of emissions, generated or amplified in a receiver, which appear at the UE antenna connector. The requirements in UE transmit bands are valid in URA_PCH, Cell_PCH and idle state.

The quality level at the thresholds Q_{out} correspond to different signal levels depending on the downlink conditions DCH parameters. For the conditions in table 14, a signal with the quality at the level Q_{out} can be generated by a $DPCCH_{Ec}/I_{or}$ ratio of -25 dB. The DL reference measurement channel 12,2 kbit/s is specified in TS 134 121-1 [6] and with static propagation conditions. The downlink physical channels, other than those specified in table 14, are as specified in TS 134 121-1 [6].

Table 14: DCH parameters for test of out-of-synchronization handling

Parameter	Value	Unit
\hat{I}_{or}/I_{oc}	-1	dB
I_{oc}	-60	dBm/3,84 MHz
$\frac{DPDCH_{Ec}}{I_{or}}$	See figure 1: Before point A -16,6 After point A not defined	dB
$\frac{DPCCH_{Ec}}{I_{or}}$	See figure 1	dB
Information Data Rate	12,2	kbit/s

Figure 1 shows an example scenario where the $DPCCH_{Ec}/I_{or}$ ratio varies from a level where the DPCH is demodulated under normal conditions, down to a level below Q_{out} where the UE shall shut its power off.

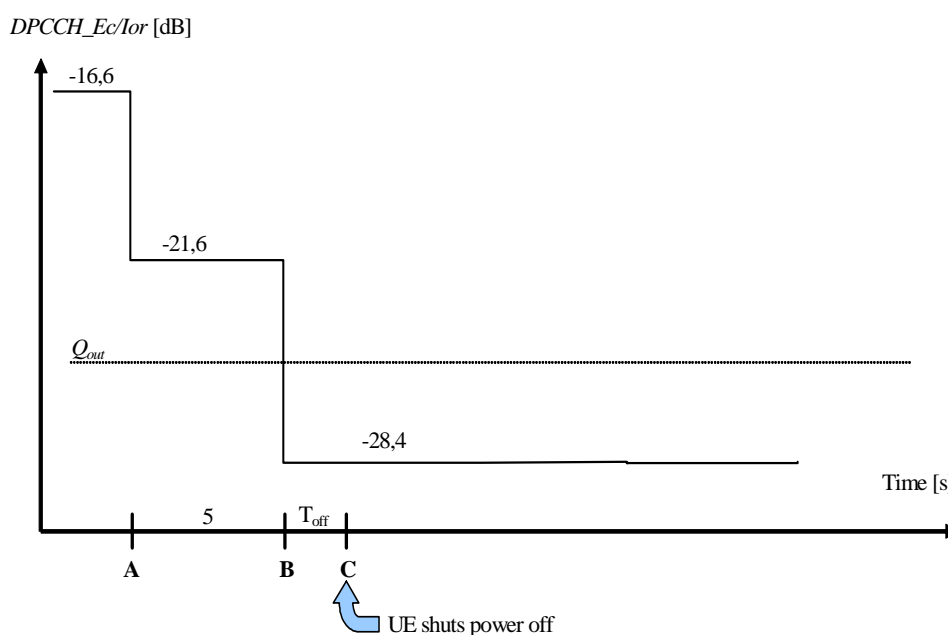


Figure 1: Conditions for out-of-synch handling in the UE

The requirements for the UE are that it shall shut its transmitter off before point C.

The UE transmitter is considered to be OFF if the measured RRC filtered mean power is less than -55 dBm.

4.2.11.3 Conformance

Conformance tests described in clause 5.3.10 shall be carried out.

4.2.10.2 Limits

The power of any narrow band CW spurious emission shall not exceed the maximum level specified in tables [4.2.10.2-1](#) and [4.2.10.2-2](#)

Table 4.2.10.2-1: General receiver spurious emission requirements

Frequency band	Measurement bandwidth	Maximum level
$30 \text{ MHz} \leq f < 1 \text{ GHz}$	100 kHz	-57 dBm
$1 \text{ GHz} \leq f \leq 12,75 \text{ GHz}$	1 MHz	-47 dBm

Table 4.2.10.2-2: Additional receiver spurious emission requirements

Band	Frequency Range	Measurement Bandwidth	Maximum level
I	$921 \text{ MHz} \leq f < 925 \text{ MHz}$	100 kHz	-60 dBm (see note)
	$925 \text{ MHz} \leq f \leq 935 \text{ MHz}$	100 kHz	-67 dBm (see note)
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$	100 kHz	-79 dBm (see note)
	$1\ 805 \text{ MHz} \leq f \leq 1\ 880 \text{ MHz}$	100 kHz	-71 dBm (see note)
	$1\ 920 \text{ MHz} \leq f \leq 1\ 980 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 110 \text{ MHz} \leq f \leq 2\ 170 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 585 \text{ MHz} \leq f \leq 2\ 690 \text{ MHz}$	3,84 MHz	-60 dBm
III	$921 \text{ MHz} \leq f < 925 \text{ MHz}$	100 kHz	-60 dBm (see note)
	$925 \text{ MHz} \leq f \leq 935 \text{ MHz}$	100 kHz	-67 dBm (see note)
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$	100 kHz	-79 dBm (see note)
	$1\ 710 \text{ MHz} \leq f \leq 1\ 785 \text{ MHz}$	3,84 MHz	-60 dBm
	$1\ 805 \text{ MHz} \leq f \leq 1\ 880 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 110 \text{ MHz} \leq f \leq 2\ 170 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 585 \text{ MHz} \leq f \leq 2\ 690 \text{ MHz}$	3,84 MHz	-60 dBm
VII	$921 \text{ MHz} \leq f < 925 \text{ MHz}$	100 kHz	-60 dBm (see note)
	$925 \text{ MHz} \leq f \leq 935 \text{ MHz}$	100 kHz	-67 dBm (see note)
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$	100 kHz	-79 dBm (see note)
	$1\ 805 \text{ MHz} \leq f \leq 1\ 880 \text{ MHz}$	100 kHz	-71 dBm (see note)
	$2\ 110 \text{ MHz} \leq f \leq 2\ 170 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 500 \text{ MHz} \leq f \leq 2\ 570 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 620 \text{ MHz} \leq f \leq 2\ 690 \text{ MHz}$	3,84 MHz	-60 dBm
VIII	$880 \text{ MHz} \leq f \leq 915 \text{ MHz}$	3,84 MHz	-60 dBm
	$921 \text{ MHz} \leq f < 925 \text{ MHz}$	100 kHz	-60 dBm (see note)
	$925 \text{ MHz} \leq f \leq 935 \text{ MHz}$	100 kHz 3,84 MHz	-67 dBm (see note) -60 dBm
	$935 \text{ MHz} < f \leq 960 \text{ MHz}$	100 kHz	-79 dBm (see note)
	$1\ 805 \text{ MHz} < f \leq 1\ 880 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 110 \text{ MHz} < f \leq 2\ 170 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 585 \text{ MHz} < f \leq 2\ 690 \text{ MHz}$	3,84 MHz	-60 dBm
XV	$921 \text{ MHz} \leq f < 925 \text{ MHz}$	100 kHz	-60 dBm (see note)
	$925 \text{ MHz} \leq f < 935 \text{ MHz}$	100 kHz 3,84 MHz	-67 dBm (see note) -60 dBm
	$935 \text{ MHz} \leq f \leq 960 \text{ MHz}$	100 kHz	-79 dBm (see note)
	$1\ 805 \text{ MHz} \leq f \leq 1\ 880 \text{ MHz}$	100 kHz	-71 dBm (see note)
	$1\ 900 \text{ MHz} \leq f \leq 1\ 920 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 110 \text{ MHz} \leq f \leq 2\ 170 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 585 \text{ MHz} \leq f < 2\ 690 \text{ MHz}$	3,84 MHz	-60 dBm
XVI	$921 \text{ MHz} \leq f < 925 \text{ MHz}$	100 kHz	-60 dBm (see note)
	$925 \text{ MHz} \leq f < 935 \text{ MHz}$	100 kHz 3,84 MHz	-67 dBm (see note) -60 dBm
	$935 \text{ MHz} < f < 960 \text{ MHz}$	100 kHz	-79 dBm (see note)
	$1\ 805 \text{ MHz} \leq f < 1\ 880 \text{ MHz}$	100 kHz	-71 dBm (see note)
	$2\ 010 \text{ MHz} \leq f < 2\ 025 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 110 \text{ MHz} \leq f \leq 2\ 170 \text{ MHz}$	3,84 MHz	-60 dBm
	$2\ 585 \text{ MHz} \leq f \leq 2\ 690 \text{ MHz}$	3,84 MHz	-60 dBm

4.2.12 Transmitter Adjacent Channel Leakage power Ratio (ACLR)

4.2.12.1 Definition

Adjacent Channel Leakage power Ratio (ACLR) is the ratio of the RRC filtered mean power centred on the assigned channel frequency to the RRC filtered mean power centred on an adjacent channel frequency.

4.2.12.2 Limits

If the adjacent channel power is greater than -50dBm then the ACLR shall be higher than the value specified in table ~~14A~~. The requirements are applicable for all for the values of β_c , β_d , β_{hs} , β_{ec} and β_{ed} defined in TS 125 214 [~~14~~].

~~Table 14A: UE ACLR~~

Power Class	Adjacent channel frequency relative to assigned channel frequency	ACLR limit
3	+5 MHz or -5 MHz	32,2 dB
3	+10 MHz or -10 MHz	42,2 dB
4	+5 MHz or -5 MHz	32,2 dB
4	+10 MHz or -10 MHz	42,2 dB

NOTE 1: The requirement shall still be met in the presence of switching transients.
 NOTE 2: The ACLR requirements reflect what can be achieved with present state of the art technology.
 NOTE 3: Requirement on the UE shall be reconsidered when the state of the art technology progresses.

4.2.12.3 Conformance

Conformance tests described in clause 5.3.11 shall be carried out.

5 Testing for compliance with technical requirements

5.1 Environmental conditions for testing

Tests defined in the present document shall be carried out at representative points within the boundary limits of the declared operational environmental profile.

Where technical performance varies subject to environmental conditions, tests shall be carried out under a sufficient variety of environmental conditions (within the boundary limits of the declared operational environmental profile) to give confidence of compliance for the affected technical requirements.

Normally it should be sufficient for all tests to be conducted using normal test conditions except where otherwise stated. For guidance on the use of other conditions to be used in order to show compliance reference can be made to TS 134 121-1 [~~6~~].

Many tests in the present document are performed with appropriate frequencies in the low, middle and high range of the operating frequency band of the UE. These frequencies are defined in TS 134 108 [~~7~~].

5.2 Interpretation of the measurement results

The interpretation of the results recorded in a test report for the measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit may be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be included in the test report;

Band	Frequency Range	Measurement Bandwidth	Maximum level
NOTE: The measurements are made on frequencies which are integer multiples of 200 kHz. As exceptions, up to five measurements with a level up to the applicable requirements defined in table 4.2.10.2-1 are permitted for each UARFCN used in the measurement.			

4.2.10.3 Conformance

Conformance tests described in clause 5.3.9 shall be carried out.

4.2.11 Out-of-synchronization handling of output power

4.2.11.1 Definition

The UE shall monitor the DPCCH quality in order to detect a loss of the signal on Layer 1. The threshold Q_{out} specifies at what DPCCH quality levels the UE shall shut its power off. The threshold is not defined explicitly, but is defined by the conditions under which the UE shall shut its transmitter off, as stated in this clause.

The DPCCH quality shall be monitored in the UE and compared to the threshold Q_{out} for the purpose of monitoring synchronization. The threshold Q_{out} should correspond to a level of DPCCH quality where no reliable detection of the TPC commands transmitted on the downlink DPCCH can be made. This can be at a TPC command error ratio level of e.g. 20 %.

4.2.11.2 Limits

When the UE estimates the DPCCH quality over the last 160 ms period to be worse than a threshold Q_{out} , the UE shall shut its transmitter off within 40 ms.

The quality level at the thresholds Q_{out} correspond to different signal levels depending on the downlink conditions DCH parameters. For the conditions in table 4.2.11.2-1, a signal with the quality at the level Q_{out} can be generated by a $DPCCH_{Ec}/I_{or}$ ratio of -25 dB. The DL reference measurement channel 12,2 kbit/s is specified in TS 134 121-1 [2] and with static propagation conditions. The downlink physical channels, other than those specified in table 4.2.11.2-1, are as specified in TS 134 121-1 [2].

Table 4.2.11.2-1: DCH parameters for test of out-of-synchronization handling

Parameter	Value	Unit
\hat{I}_{or}/I_{oc}	-1	dB
I_{oc}	-60	dBm/3,84 MHz
$\frac{DPDCH_{Ec}}{I_{or}}$	See figure 4.2.11.2-1: Before point A -16,6 After point A not defined	dB
$\frac{DPCCH_{Ec}}{I_{or}}$	See figure 4.2.11.2-1	dB
Information Data Rate	12,2	kbit/s

Figure 4.2.11.2-1 shows an example scenario where the $DPCCH_{Ec}/I_{or}$ ratio varies from a level where the DPCH is demodulated under normal conditions, down to a level below Q_{out} where the UE shall shut its power off.

- the recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 15.

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR 100 028 [4] and shall correspond to an expansion factor (coverage factor) $k = 1,96$ (which provides a confidence level of 95 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). For guidance on other measurement conditions reference can be made to annex (s) of TS 134 121-1 [6].

Table 15 is based on this expansion factor.

Table 15: Maximum measurement uncertainty of the test system

Parameter	Conditions	Test system uncertainty
Transmitter maximum output power		±0,7 dB
Transmitter spectrum emissions mask		±1,5 dB
Transmitter spurious emissions	$f \leq 2,2$ GHz $2,2$ GHz < $f \leq 4$ GHz $f > 4$ GHz Co-existence band (↔ -60 dBm) Co-existence band (< -60 dBm)	±1,5 dB ±2,0 dB ±4,0 dB ±2,0 dB ±3,0 dB
Transmitter Minimum output power		±1,0 dB
Receiver Adjacent Channel Selectivity (ACS)		±1,1 dB
Receiver Blocking characteristics	$f < 15$ MHz offset: 15 MHz offset ↔ $f \leq 2,2$ GHz $2,2$ GHz < $f \leq 4$ GHz $f > 4$ GHz	±1,4 dB ±1,0 dB ±1,7 dB ±3,1 dB
Receiver spurious response	$f \leq 2,2$ GHz $2,2$ GHz < $f \leq 4$ GHz $f > 4$ GHz	±1,0 dB ±1,7 dB ±3,1 dB
Receiver intermodulation characteristics		±1,3 dB
Receiver spurious emissions	For UE receive band (-60 dBm) For UE transmit band (-60 dBm) Outside the UE receive band: $f \leq 2,2$ GHz $2,2$ GHz < $f \leq 4$ GHz $f > 4$ GHz	±3,0 dB ±3,0 dB ±2,0 dB ±2,0 dB ±4,0 dB
Out of synchronization of handling power	DPCCH Ec/Ior Transmit OFF power	±0,4 dB ±1,0 dB
Transmitter adjacent channel leakage power ratio	-	±0,8 dB
NOTE 1: For RF tests it should be noted that the uncertainties in table 15 apply to the test system operating into a nominal 50 Ω load and do not include system effects due to mismatch between the EUT and the test system. NOTE 2: Annex C of TR 100 028-2 [4] provides guidance for the calculation of the uncertainty components relating to mismatch. NOTE 3: If the test system for a test is known to have a measurement uncertainty greater than that specified in table 15, this equipment can still be used provided that an adjustment is made follows: any additional uncertainty in the test system over and above that specified in table 15 should be used to tighten the test requirements - making the test harder to pass (for some tests, e. g. receiver tests, this may require modification of stimulus signals). This procedure will ensure that a test system not compliant with table 15 does not increase the probability of passing an EUT that would otherwise have failed a test if a test system compliant with table 15 had been used.		

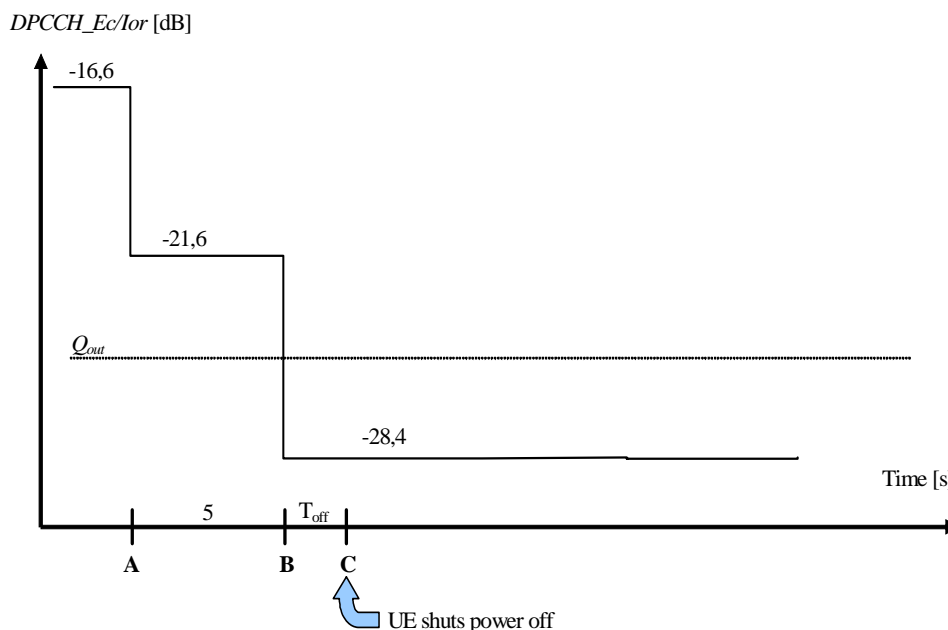


Figure 4.2.11.2-1: Conditions for out-of-synchronization handling in the UE

The requirements for the UE are that it shall shut its transmitter off before point C.

The UE transmitter is considered to be OFF if the measured RRC filtered mean power is less than -55 dBm.

4.2.11.3 Conformance

Conformance tests described in clause 5.3.10 shall be carried out.

4.2.12 Transmitter Adjacent Channel Leakage power Ratio (ACLR)

4.2.12.1 Definition

Adjacent Channel Leakage power Ratio (ACLR) is the ratio of the RRC filtered mean power centred on the assigned channel frequency to the RRC filtered mean power centred on an adjacent channel frequency.

4.2.12.2 Limits

If the adjacent channel power is greater than -50dBm then the ACLR shall be higher than the value specified in table 4.2.12.2-1. The requirements are applicable for all for the values of β_c , β_d , β_{hs} , β_{ec} and β_{ed} defined in TS 125 214 [8].

Table 4.2.12.2-1: UE ACLR

Power Class	Adjacent channel frequency relative to assigned channel frequency	ACLR limit
3	+5 MHz or -5 MHz	32,2 dB
3	+10 MHz or -10 MHz	42,2 dB
4	+5 MHz or -5 MHz	32,2 dB
4	+10 MHz or -10 MHz	42,2 dB

NOTE 1: The requirement shall still be met in the presence of switching transients.

NOTE 2: The ACLR requirements reflect what can be achieved with present state of the art technology.

NOTE 3: Requirement on the UE shall be reconsidered when the state of the art technology progresses.

~~5.3 Essential radio test suites~~

5.3.1 Transmitter maximum output power

5.3.1.1 Method of test

5.3.1.1.1 Initial conditions

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH (~~for guidance~~ see annex B).

The frequencies to be tested are low range, mid range and high range as defined in TS 134 108 [~~7~~].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [~~6~~], TS 134 108 [~~7~~] and TS ~~34.109~~ [~~8~~] respectively.

5.3.1.1.2 Procedure

- 1) Set and send continuously Up power control commands to the UE.
- 2) Measure the mean power of the UE in a bandwidth of at least $(1 + \alpha)$ times the chip rate of the radio access mode. The mean power shall be averaged over at least one timeslot.

5.3.1.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.2.2 in order to show compliance.

5.3.2 Transmitter spectrum emission mask

5.3.2.1 Method of test

5.3.2.1.1 Initial conditions for UEs not supporting HSDPA and/or E-DCH

Test environment: normal (~~for guidance~~ see annex B).

The frequencies to be tested are low range, mid range and high range as defined in TS 134 108 [~~7~~].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [~~6~~], TS 134 108 [~~7~~] and TS ~~34.109~~ [~~8~~] respectively.

5.3.2.1.1A Initial conditions for UEs supporting HSDPA and/or E-DCH

Details of initial conditions for UEs supporting HSDPA can be found in TS 134 121-1 [~~6~~], clause 5.9A. Details of test method for UEs supporting E-DCH can be found in TS 134 121-1 [~~6~~], clause 5.9B.

4.2.12.3 Conformance

Conformance tests described in clause 5.3.11 shall be carried out.

5 Testing for compliance with technical requirements

5.1 Environmental conditions for testing

Tests defined in the present document shall be carried out at representative points within the boundary limits of the declared operational environmental profile.

Where technical performance varies subject to environmental conditions, tests shall be carried out under a sufficient variety of environmental conditions (within the boundary limits of the declared operational environmental profile) to give confidence of compliance for the affected technical requirements.

Normally it should be sufficient for all tests to be conducted using normal test conditions except where otherwise stated. For guidance on the use of other conditions to be used in order to show compliance reference can be made to TS 134 121-1 [2].

Many tests in the present document are performed with appropriate frequencies in the low, middle and high range of the operating frequency band of the UE. These frequencies are defined in TS 134 108 [3].

5.2 Interpretation of the measurement results

The interpretation of the results recorded in a test report for the measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit may be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be included in the test report;
- the recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 5.2-1.

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated and shall correspond to an expansion factor (coverage factor) $k = 1,96$ (which provides a confidence level of 95 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Principles for the calculation of measurement uncertainty are contained in TR 100 028 [4] or TR 102 215 [5]. For guidance on other measurement conditions reference can be made to annex (s) of TS 134 121-1 [2].

Table 5.2-1 is based on this expansion factor.

Table 5.2-1: Maximum measurement uncertainty of the test system

Parameter	Conditions	Test system uncertainty
Transmitter maximum output power		±0,7 dB
Transmitter spectrum emissions mask		±1,5 dB
Transmitter spurious emissions	$f \leq 2,2$ GHz	±1,5 dB
	$2,2$ GHz $< f \leq 4$ GHz	±2,0 dB
	$f > 4$ GHz	±4,0 dB
	Co-existence band (≥ -60 dBm)	±2,0 dB
	Co-existence band (< -60 dBm)	±3,0 dB
Transmitter Minimum output power		±1,0 dB
Receiver Adjacent Channel Selectivity (ACS)		±1,1 dB

5.3.2.1.2 Procedure for UEs not supporting HSDPA and/or E-DCH

- 1) Set and send continuously Up power control commands to the UE until the UE output power shall be at the maximum level.
- 2) Measure the power of the transmitted signal with a measurement filter of bandwidths according to table 4. Measurements with an offset from the carrier centre frequency between 2,515 MHz and 3,485 MHz shall use a 30 kHz measurement filter. Measurements with an offset from the carrier centre frequency between 4 MHz and 12 MHz shall use 1 MHz measurement bandwidth and the result may be calculated by integrating multiple 50 kHz or narrower filter measurements. The characteristic of the filter shall be approximately Gaussian (typical spectrum analyzer filter). The centre frequency of the filter shall be stepped in contiguous steps according to table 4. The measured power shall be recorded for each step.
- 3) Measure the RRC filtered mean power centred on the assigned channel frequency.
- 4) Calculate the ratio of the power 2) with respect to 3) in dBc.

5.3.2.1.2A Procedure for UEs supporting HSDPA and/or E-DCH

Details of procedure for UEs supporting HSDPA can be found in TS 134 121-1 [6], clause 5.9A. Details of test method for UEs supporting E-DCH can be found in TS 134 121-1 [6], clause 5.9B.

5.3.2.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.3.2 in order to show compliance.

5.3.3 Transmitter spurious emissions

5.3.3.1 Method of test

5.3.3.1.1 Initial conditions

Test environment: normal (for guidance see annex B).

The frequencies to be tested are low range, mid range and high range as defined in TS 134 108 [7].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [6], TS 134 108 [7] and ~~TS 34.109 [8]~~ respectively.

5.3.3.1.2 Procedure

- 1) Set and send continuously Up power control commands to the UE until the UE output power shall be maximum level.
- 2) Sweep the spectrum analyser (or equivalent equipment) over a frequency range and measure the average power of spurious emission.

5.3.3.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.4.2 in order to show compliance.

Parameter	Conditions	Test system uncertainty
Receiver Blocking characteristics	f < 15 MHz offset: 15 MHz offset < f < 2,2 GHz 2,2 GHz < f ≤ 4 GHz f > 4 GHz	±1,4 dB ±1,0 dB ±1,7 dB ±3,1 dB
Receiver spurious response	f ≤ 2,2 GHz 2,2 GHz < f ≤ 4 GHz f > 4 GHz	±1,0 dB ±1,7 dB ±3,1 dB
Receiver intermodulation characteristics		±1,3 dB
Receiver spurious emissions	For UE receive band (-60 dBm) For UE transmit band (-60 dBm) Outside the UE receive band: f ≤ 2,2 GHz 2,2 GHz < f ≤ 4 GHz f > 4 GHz	±3,0 dB ±3,0 dB ±2,0 dB ±2,0 dB ±4,0 dB
Out of synchronization of handling power	DPCCH Ec/Ior Transmit OFF power	±0,4 dB ±1,0 dB
Transmitter adjacent channel leakage power ratio	-	±0,8 dB
NOTE 1: For RF tests it should be noted that the uncertainties in table 5-2-1 apply to the test system operating into a nominal 50 Ω load and do not include system effects due to mismatch between the EUT and the test system.		
NOTE 2: If the test system for a test is known to have a measurement uncertainty greater than that specified in table 5-2-1, this equipment can still be used provided that an adjustment is made follows: any additional uncertainty in the test system over and above that specified in table 5-2-1 should be used to tighten the test requirements - making the test harder to pass (for some tests, e.g. receiver tests, this may require modification of stimulus signals). This procedure will ensure that a test system not compliant with table 5-2-1 does not increase the probability of passing an EUT that would otherwise have failed a test if a test system compliant with table 5-2-1 had been used.		

5.3 Essential radio test suites

This clause describes the test suites for UTRA FDD, E-UTRA FDD. User Equipment test suites are in EN 301 908-13 [1].

5.3.1 Transmitter maximum output power

5.3.1.1 Method of test

5.3.1.1.1 Initial conditions

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH (see annex B).

The frequencies to be tested are low range, mid range and high range as defined in TS 134 108 [3].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [2], TS 134 108 [3] and TS 134 109 [4] respectively.

5.3.1.1.2 Procedure

- 1) Set and send continuously Up power control commands to the UE.
- 2) Measure the mean power of the UE in a bandwidth of at least $(1 + \alpha)$ times the chip rate of the radio access mode. The mean power shall be averaged over at least one timeslot.

5.3.4 Transmitter minimum output power

5.3.4.1 Method of test

5.3.4.1.1 Initial conditions

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH (for ~~guidance~~ see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [~~7~~].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [~~6~~], TS 134 108 [~~7~~] and TS ~~34.109~~ [~~8~~].

5.3.4.1.2 Procedure

- 1) Set and send continuously Down power control commands to the UE.
- 2) Measure the mean power of the UE.

5.3.4.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.5.2 in order to show compliance.

5.3.5 Receiver Adjacent Channel Selectivity (ACS)

5.3.5.1 Method of test

5.3.5.1.1 Initial conditions

Test environment: normal (for ~~guidance~~ see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [~~7~~].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure, and RF parameters are set up according to table ~~7~~.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [~~6~~], TS ~~134 108~~ [~~7~~] and TS ~~34.109~~ [~~8~~] respectively.

5.3.5.1.2 Procedure

- 1) Set the parameters of the interference signal generator as shown in table ~~7~~ case 1.
- 2) Set the power level of UE according to the table ~~7~~ case 1 with ± 1 dB tolerance.
- 3) Measure the BER of DCH received from the UE at the SS.
- 4) Set the parameters of the interference signal generator as shown in table ~~7~~ case 2.
- 5) Set the power level of UE according to the table ~~7~~ case 2 with ± 1 dB tolerance.
- 6) Measure the BER of DCH received from the UE at the SS.

5.3.1.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.2.2 in order to show compliance.

5.3.2 Transmitter spectrum emission mask

5.3.2.1 Method of test

5.3.2.1.1 Initial conditions for UEs not supporting HSDPA and/or E-DCH

Test environment: normal (see annex B).

The frequencies to be tested are low range, mid range and high range as defined in TS 134 108 [3]:

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [2], TS 134 108 [3] and TS 134 109 [4] respectively.

5.3.2.1.1A Initial conditions for UEs supporting HSDPA and/or E-DCH

Details of initial conditions for UEs supporting HSDPA can be found in TS 134 121-1 [2], clause 5.9A. Details of test method for UEs supporting E-DCH can be found in TS 134 121-1 [2], clause 5.9B.

5.3.2.1.2 Procedure for UEs not supporting HSDPA and/or E-DCH

- 1) Set and send continuously Up power control commands to the UE until the UE output power shall be at the maximum level.
- 2) Measure the power of the transmitted signal with a measurement filter of bandwidths according to table 4.2.3.2-1. Measurements with an offset from the carrier centre frequency between 2,515 MHz and 3,485 MHz shall use a 30 kHz measurement filter. Measurements with an offset from the carrier centre frequency between 4 MHz and 12 MHz shall use 1 MHz measurement bandwidth and the result may be calculated by integrating multiple 50 kHz or narrower filter measurements. The characteristic of the filter shall be approximately Gaussian (typical spectrum analyzer filter). The centre frequency of the filter shall be stepped in contiguous steps according to table 4.2.3.2-1. The measured power shall be recorded for each step.
- 3) Measure the RRC filtered mean power centred on the assigned channel frequency.
- 4) Calculate the ratio of the power 2) with respect to 3) in dBc.

5.3.2.1.2A Procedure for UEs supporting HSDPA and/or E-DCH

Details of procedure for UEs supporting HSDPA can be found in TS 134 121-1 [2], clause 5.9A. Details of test method for UEs supporting E-DCH can be found in TS 134 121-1 [2], clause 5.9B.

5.3.2.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.3.2 in order to show compliance.

5.3.5.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.6.2 in order to show compliance.

5.3.6 Receiver blocking characteristics

5.3.6.1 Method of test

5.3.6.1.1 Initial requirements

Test environment: normal (~~for guidance~~ see annex B).

For in-band case, the frequencies to be tested are mid range as defined in TS 134 108 [~~7~~]. For out-of-band case, frequencies to be tested are mid range as defined in TS 134 108 [~~7~~].

For narrow band case, frequencies to be tested are mid range as defined in TS 134 108 [~~7~~].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure, and RF parameters are set up according to tables ~~8, 9 and 9A~~.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [~~6~~], TS 134 108 [~~7~~] and TS ~~34.109~~ [~~8~~] respectively.

5.3.6.1.2 Procedure

- 1) Set the parameters of the CW generator or the interference signal generator as shown in tables ~~8, 9 and 9A~~. For ~~table 9~~ the frequency step size is 1 MHz.
- 2) Set the power level of the UE according to tables ~~8, 9 and 9A~~ with a ± 1 dB tolerance.
- 3) Measure the BER of DCH received from the UE at the SS.
- 4) For table ~~9~~, record the frequencies for which the BER exceeds the test requirements.

5.3.6.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.7.2 in order to show compliance.

5.3.7 Receiver spurious response

5.3.7.1 Method of test

5.3.7.1.1 Initial conditions

Test environment: normal (~~for guidance~~ see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [~~7~~].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure, and RF parameters are set up according to table ~~10~~.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [~~6~~], TS 134 108 [~~7~~] and TS ~~34.109~~ [~~8~~] respectively.

5.3.3 Transmitter spurious emissions

5.3.3.1 Method of test

5.3.3.1.1 Initial conditions

Test environment: normal (see annex B).

The frequencies to be tested are low range, mid range and high range as defined in TS 134 108 [3]:

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [2], TS 134 108 [3] and TS 134 109 [4] respectively.

5.3.3.1.2 Procedure

- 1) Set and send continuously Up power control commands to the UE until the UE output power shall be maximum level.
- 2) Sweep the spectrum analyser (or equivalent equipment) over a frequency range and measure the average power of spurious emission.

5.3.3.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.4.2 in order to show compliance.

5.3.4 Transmitter minimum output power

5.3.4.1 Method of test

5.3.4.1.1 Initial conditions

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH (see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [3]:

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [2], TS 134 108 [3] and TS 134 109 [4].

5.3.4.1.2 Procedure

- 1) Set and send continuously Down power control commands to the UE.
- 2) Measure the mean power of the UE.

5.3.4.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.5.2 in order to show compliance.

5.3.7.1.2 Procedure

- 1) Set the parameter of the CW generator as shown in table ~~10~~. The spurious response frequencies are determined in step 4) of clause 5.3.6.1.2.
- 2) Set the power level of the UE according to table ~~10~~ with a ± 1 dB tolerance.
- 3) Measure the BER of DCH received from the UE at the SS.

5.3.7.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.8.2 in order to show compliance.

5.3.8 Receiver Intermodulation characteristics

5.3.8.1 Method of test

5.3.8.1.1 Initial conditions

Test environment: normal (~~for guidance~~ see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [~~7~~].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure as per TS 134 108 [~~7~~], and RF parameters are set up according to ~~table 11 and 11A~~.
- 3) Enter the UE into loopback test mode and start the loopback test using the procedure defined in TS ~~34.109~~ [8].

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [~~6~~], TS 134 108 [~~7~~] and TS ~~34.109~~ [8].

5.3.8.1.2 Procedure

- 1) Set the parameters of the CW generator and interference generator as shown in tables ~~11 and 11A~~.
- 2) Set the power level of the UE according to tables ~~11 and 11A~~ with a ± 1 dB tolerance.
- 3) Measure the BER of DCH received from the UE at the SS.

5.3.8.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.9.2 in order to show compliance.

5.3.9 Receiver spurious emissions

5.3.9.1 Method of test

5.3.9.1.1 Initial conditions

Test environment: normal (~~for guidance~~ see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [~~7~~].

- 1) Connect a spectrum analyser (or other suitable test equipment) to the UE antenna connector.
- 2) UE shall be in CELL_FACH state.
- 3) The UE shall be setup such that UE will not transmit during the measurement. (For guidance see TS 134 121-1 [~~6~~]).

5.3.5 Receiver Adjacent Channel Selectivity (ACS)

5.3.5.1 Method of test

5.3.5.1.1 Initial conditions

Test environment: normal (see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [3]:

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure, and RF parameters are set up according to table [4.2.6.2-1](#).
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [2], [TS 134 108 \[3\]](#) and [TS 134 109 \[4\]](#) respectively.

5.3.5.1.2 Procedure

- 1) Set the parameters of the interference signal generator as shown in table [4.2.6.2-1](#) case 1.
- 2) Set the power level of UE according to the table [4.2.6.2-1](#) case 1 with ± 1 dB tolerance.
- 3) Measure the BER of DCH received from the UE at the SS.
- 4) Set the parameters of the interference signal generator as shown in table [4.2.6.2-1](#) case 2.
- 5) Set the power level of UE according to the table [4.2.6.2-1](#) case 2 with ± 1 dB tolerance.
- 6) Measure the BER of DCH received from the UE at the SS.

5.3.5.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.6.2 in order to show compliance.

5.3.6 Receiver blocking characteristics

5.3.6.1 Method of test

5.3.6.1.1 Initial requirements

Test environment: normal (see annex B).

For in-band case, the frequencies to be tested are mid range as defined in TS 134 108 [3]. For out-of-band case, frequencies to be tested are mid range as defined in TS 134 108 [3].

For narrow band case, frequencies to be tested are mid range as defined in TS 134 108 [3]:

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure, and RF parameters are set up according to tables [4.2.7.2-1](#), [4.2.7.2-2](#) and [4.2.7.2-3](#).
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [2], [TS 134 108 \[3\]](#) and [TS 134 109 \[4\]](#) respectively.

5.3.9.1.2 Procedure

Sweep the spectrum analyser (or other suitable test equipment) over a frequency range from 30 MHz to 12,75 GHz and measure the average power of the spurious emissions.

5.3.9.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.10.2 in order to show compliance.

5.3.10 Out-of-synchronization handling of output power

5.3.10.1 Method of test

5.3.10.1.1 Initial conditions

Test environment: normal (~~for guidance~~ see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [~~7~~].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure, with the following exception according to table ~~16~~ for information elements in System Information Block type 1 found in TS 134 108 [~~7~~].

~~Table 16:~~ System Information Block type 1 message

Information Element	Value
UE Timers and constants in connected mode	
- T313	15 s
- N313	200

- 3) RF parameters are set up according to table ~~14~~ with DPCCH_Ec/Ior ratio level at -16,6 dB.
- 4) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [~~6~~], TS 134 108 [~~7~~] and TS ~~34.109~~ [~~8~~] respectively.

5.3.10.1.2 Procedure

- 1) The SS sends continuously up power control commands to the UE until the UE transmitter power reach maximum level.
- 2) The SS controls the DPCCH_Ec/Ior ratio level to -21,6 dB.
- 3) The SS controls the DPCCH_Ec/Ior ratio level to -28,4 dB. The SS waits 200 ms and then verifies that the UE transmitter has been switched off.
- 4) The SS monitors the UE transmitted power for 5 s and verifies that the UE transmitter is not switched on during this time.

5.3.10.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.11.2 in order to show compliance.

5.3.6.1.2 Procedure

- 1) Set the parameters of the CW generator or the interference signal generator as shown in tables [4.2.7.2-1](#), [4.2.7.2-2](#) and [4.2.7.2-3](#). For table [4.2.7.2-2](#) the frequency step size is 1 MHz.
- 2) Set the power level of the UE according to tables [4.2.7.2-1](#), [4.2.7.2-2](#) and [4.2.7.2-3](#) with a ± 1 dB tolerance.
- 3) Measure the BER of DCH received from the UE at the SS.
- 4) For table [4.2.7.2-2](#), record the frequencies for which the BER exceeds the test requirements.

5.3.6.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.7.2 in order to show compliance.

5.3.7 Receiver spurious response

5.3.7.1 Method of test

5.3.7.1.1 Initial conditions

Test environment: normal (see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [\[3\]](#):

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure, and RF parameters are set up according to table [4.2.8.2-1](#).
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [\[2\]](#), TS 134 108 [\[3\]](#) and TS 134 109 [\[4\]](#) respectively.

5.3.7.1.2 Procedure

- 1) Set the parameter of the CW generator as shown in table [4.2.8.2-1](#). The spurious response frequencies are determined in step 4) of clause 5.3.6.1.2.
- 2) Set the power level of the UE according to table [4.2.8.2-1](#) with a ± 1 dB tolerance.
- 3) Measure the BER of DCH received from the UE at the SS.

5.3.7.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.8.2 in order to show compliance.

5.3.8 Receiver Intermodulation characteristics

5.3.8.1 Method of test

5.3.8.1.1 Initial conditions

Test environment: normal (see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [\[3\]](#):

- 1) Connect the SS to the UE antenna connector.

5.3.11 Transmitter adjacent channel leakage power ratio

5.3.11.1 Method of test

5.3.11.1.1 Initial conditions for UEs not supporting HSDPA and/or E-DCH

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH (~~for guidance see annex B~~).

The frequencies to be tested are mid range as defined in TS 134 108 [~~7~~].

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [~~6~~], TS 134 108 [~~7~~] and TS ~~34.109 [8]~~ respectively.

5.3.11.1.1A Initial conditions for UEs supporting HSDPA and/or E-DCH

Details of initial conditions for UEs supporting HSDPA can be found in TS 134 121-1 [~~6~~], clause 5.10A. Details of test method for UEs supporting E-DCH can be found in TS 134 121-1 [~~6~~], clause 5.10B.

5.3.11.1.2 Procedure for UEs not supporting HSDPA and/or E-DCH

- 1) The SS sends continuously Up power control commands to the UE until the UE transmitter power reach maximum level.
- 2) Measure the RRC filtered mean power.
- 3) Measure the RRC filtered mean power of the first adjacent channels and the second adjacent channels.
- 4) Calculate the ratio of the power between the values measured in 2) and 3) above.

5.3.11.1.2A Procedure for UEs supporting HSDPA and/or E-DCH

Details of procedure for UEs supporting HSDPA can be found in TS 134 121-1 [~~6~~], clause 5.10A. Details of test method for UEs supporting E-DCH can be found in TS 134 121-1 [~~6~~], clause 5.10B.

5.3.11.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.12.2 in order to show compliance.

- 2) A call is set up according to the Generic call setup procedure as per TS 134 108 [3], and RF parameters are set up according to [tables 4.2.9.2-1 and 4.2.9.2-2](#).
- 3) Enter the UE into loopback test mode and start the loopback test using the procedure defined in TS [134 109 \[4\]](#).

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [2], TS 134 108 [3] and [TS 134 109 \[4\]](#).

5.3.8.1.2 Procedure

- 1) Set the parameters of the CW generator and interference generator as shown in [tables 4.2.9.2-1 and 4.2.9.2-2](#).
- 2) Set the power level of the UE according to [tables 4.2.9.2-1 and 4.2.9.2-2](#) with a ± 1 dB tolerance.
- 3) Measure the BER of DCH received from the UE at the SS.

5.3.8.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.9.2 in order to show compliance.

5.3.9 Receiver spurious emissions

5.3.9.1 Method of test

5.3.9.1.1 Initial conditions

Test environment: normal (see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [3]:

- 1) Connect a spectrum analyser (or other suitable test equipment) to the UE antenna connector.
- 2) UE shall be in CELL_FACH state.
- 3) The UE shall be setup such that UE will not transmit during the measurement. (For guidance see [TS 134 121-1 \[2\]](#)).

5.3.9.1.2 Procedure

Sweep the spectrum analyser (or other suitable test equipment) over a frequency range from 30 MHz to 12,75 GHz and measure the average power of the spurious emissions.

5.3.9.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.10.2 in order to show compliance.

5.3.10 Out-of-synchronization handling of output power

5.3.10.1 Method of test

5.3.10.1.1 Initial conditions

Test environment: normal (see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [3]:

- 1) Connect the SS to the UE antenna connector.

Annex A (normative): HS Requirements and conformance Test specifications Table (HS-RTT)

The HS Requirements and conformance Test specifications Table (HS-RTT) in table ~~A.1~~ serves a number of purposes, as follows:

- it provides a statement of all the ~~essential~~ requirements in words and by cross reference to ~~a specific clause in the present document or to a specific clause in a specific referenced document,~~
- it provides a statement of all the test procedures corresponding to those ~~essential~~ requirements by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it qualifies each requirement to be either:
 - Unconditional: meaning that the requirement applies in all circumstances, or
 - Conditional: meaning that the requirement is dependent on the manufacturer having chosen to support optional functionality defined within the schedule.
- in the case of Conditional requirements, it associates the requirement with the particular optional service or functionality;
- it qualifies each test procedure to be either:
 - Essential: meaning that it is included with the Essential Radio Test Suite and therefore the requirement shall be demonstrated to be met in accordance with the referenced procedures;
 - Other: meaning that the test procedure is illustrative but other means of demonstrating compliance with the requirement are permitted.

Table ~~A.1~~: HS Requirements and conformance Test specifications Table (HS-RTT)

Harmonized Standard EN 301 908-2						
The following essential requirements and test specifications are relevant to the presumption of conformity under Article 3.2 of the R&TTE Directive						
Essential Requirement			Requirement Conditionality		Test Specification	
No	Description	Reference: Clause No	U/C	Condition	E/O	Reference: Clause No
1	Transmitter maximum output power	4.2.2	U		E	5.3.1
2	Transmitter spectrum emission mask	4.2.3	U		E	5.3.2
3	Transmitter spurious emissions	4.2.4	U		E	5.3.3
4	Transmitter minimum output power	4.2.5	U		E	5.3.4
5	Receiver Adjacent Channel Selectivity (ACS)	4.2.6	U		E	5.3.5
6	Receiver blocking characteristics	4.2.7	U		E	5.3.6
7	Receiver spurious response	4.2.8	U		E	5.3.7
8	Receiver Intermodulation characteristics	4.2.9	U		E	5.3.8
9	Receiver spurious emissions	4.2.10	U		E	5.3.9

- 2) A call is set up according to the Generic call setup procedure, with the following exception according to table [5.3.10.1.1-1](#) for information elements in System Information Block type 1 found in TS 134 108 [\[3\]](#).

Table 5.3.10.1.1-1: System Information Block type 1 message

Information Element	Value
UE Timers and constants in connected mode	
- T313	15 s
- N313	200

- 3) RF parameters are set up according to table [4.2.11.2-1](#) with DPCCH_Ec/Ior ratio level at -16,6 dB.
- 4) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [\[2\]](#), TS 134 108 [\[3\]](#) and TS 134 109 [\[4\]](#) respectively.

5.3.10.1.2 Procedure

- 1) The SS sends continuously up power control commands to the UE until the UE transmitter power reach maximum level.
- 2) The SS controls the DPCCH_Ec/Ior ratio level to -21,6 dB.
- 3) The SS controls the DPCCH_Ec/Ior ratio level to -28,4 dB. The SS waits 200 ms and then verifies that the UE transmitter has been switched off.
- 4) The SS monitors the UE transmitted power for 5 s and verifies that the UE transmitter is not switched on during this time.

5.3.10.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.11.2 in order to show compliance.

5.3.11 Transmitter adjacent channel leakage power ratio

5.3.11.1 Method of test

5.3.11.1.1 Initial conditions for UEs not supporting HSDPA and/or E-DCH

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH (see annex B).

The frequencies to be tested are mid range as defined in TS 134 108 [\[3\]](#):

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure.
- 3) Enter the UE into loopback test mode and start the loopback test.

NOTE: When reference is made to test set up, call set up and loopback test mode, guidance on the applicability of these can be found in TS 134 121-1 [\[2\]](#), TS 134 108 [\[3\]](#) and TS [134 109 \[4\]](#) respectively.

Harmonized Standard EN 301 908-2						
The following essential requirements and test specifications are relevant to the presumption of conformity under Article 3.2 of the R&TTE Directive						
Essential Requirement			Requirement Conditionality		Test Specification	
No	Description	Reference: Clause No	U/C	Condition	E/O	Reference: Clause No
10	Out-of-synchronization handling of output power	4.2.11	U		E	5.3.10
11	Transmitter adjacent channel leakage power ratio	4.2.12	U		E	5.3.11

Key to columns:**~~Essential~~ Requirement:**

No A unique identifier for one row of the table which may be used to identify a requirement or its test specification.

Description A textual reference to the requirement.

Clause Number Identification of clause(s) defining the requirement in the present document unless another document is referenced explicitly.

Requirement Conditionality:

U/C Indicates whether the requirement is to be *unconditionally* applicable (U) or is *conditional* upon the manufacturers claimed functionality of the equipment (C).

Condition Explains the conditions when the requirement shall or shall not be applicable for a technical requirement which is classified "conditional".

Test Specification:

E/O Indicates whether the test specification forms part of the Essential Radio Test Suite (E) or whether it is one of the Other Test Suite (O).

NOTE: All tests are relevant to the requirements. Rows designated "E" collectively make up the Essential Radio Test Suite. ~~All tests classified "E" shall be performed~~ as specified with satisfactory outcomes is a necessary condition for a presumption of conformity.

Clause Number Identification of clause(s) defining the test specification in the present document unless another document is referenced explicitly.

5.3.11.1.1A Initial conditions for UEs supporting HSDPA and/or E-DCH

Details of initial conditions for UEs supporting HSDPA can be found in TS 134 121-1 [2], clause 5.10A. Details of test method for UEs supporting E-DCH can be found in TS 134 121-1 [2], clause 5.10B.

5.3.11.1.2 Procedure for UEs not supporting HSDPA and/or E-DCH

- 1) The SS sends continuously Up power control commands to the UE until the UE transmitter power reach maximum level.
- 2) Measure the RRC filtered mean power.
- 3) Measure the RRC filtered mean power of the first adjacent channels and the second adjacent channels.
- 4) Calculate the ratio of the power between the values measured in 2) and 3) above.

5.3.11.1.2A Procedure for UEs supporting HSDPA and/or E-DCH

Details of procedure for UEs supporting HSDPA can be found in TS 134 121-1 [2], clause 5.10A. Details of test method for UEs supporting E-DCH can be found in TS 134 121-1 [2], clause 5.10B.

5.3.11.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.12.2 in order to show compliance.

Annex B (~~informative~~): Environmental profile

B.1 General

B.1.1 Introduction

This ~~informative~~ annex specifies the environmental profile of the UE.

B.1.2 Temperature

The UE should fulfil all the requirements in the full temperature range as given in table B.1.

Table B.1: Temperatures

Range	Conditions
+15°C to +35°C	For normal conditions (with relative humidity of 25 % to 75 %)
-10°C to +55°C	For extreme conditions (see IEC 60068-2-1 [42] and IEC 60068-2-2 [43])

The low and high extreme temperature conditions are denoted as TL (temperature low, -10°C) and TH (temperature high, +55°C).

B.1.3 Voltage

The UE should fulfil all the requirements in the full voltage range, i.e. the voltage range between the extreme voltages.

The supplier should declare the lower and higher extreme voltages and the approximate shutdown voltage. For the equipment that can be operated from one or more of the power sources listed ~~below~~, the lower extreme voltage should not be higher, and the higher extreme voltage should not be lower than that specified in table B.~~2~~

~~Table B.2: Power sources~~

Power source	Lower extreme voltage	Higher extreme voltage	Normal conditions voltage
AC mains	0,9 × nominal	1,1 × nominal	Nominal
Regulated lead acid battery	0,9 × nominal	1,3 × nominal	1,1 × nominal
Non regulated batteries:			
Leclanché/lithium	0,85 × nominal	nominal	nominal
Mercury/nickel and cadmium	0,90 × nominal	nominal	nominal

Annex A (normative): HS Requirements and conformance Test specifications Table (HS-RTT)

The HS Requirements and conformance Test specifications Table (HS-RTT) in table [A-1](#) serves a number of purposes, as follows:

- it provides a statement of all the requirements in words and by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it provides a statement of all the test procedures corresponding to those requirements by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it qualifies each requirement to be either:
 - Unconditional: meaning that the requirement applies in all circumstances, or
 - Conditional: meaning that the requirement is dependent on the manufacturer having chosen to support optional functionality defined within the schedule.
- in the case of Conditional requirements, it associates the requirement with the particular optional service or functionality;
- it qualifies each test procedure to be either:
 - Essential: meaning that it is included with the Essential Radio Test Suite and therefore the requirement shall be demonstrated to be met in accordance with the referenced procedures;
 - Other: meaning that the test procedure is illustrative but other means of demonstrating compliance with the requirement are permitted.

Table [A-1](#): HS Requirements and conformance Test specifications Table (HS-RTT)

Harmonized Standard EN 301 908-2						
The following requirements and test specifications are relevant to the presumption of conformity under the article 3.2 of the R&TTE Directive						
Requirement			Requirement Conditionality		Test Specification	
No	Description	Reference: Clause No	U/C	Condition	E/O	Reference: Clause No
1	Transmitter maximum output power	4.2.2	U		E	5.3.1
2	Transmitter spectrum emission mask	4.2.3	U		E	5.3.2
3	Transmitter spurious emissions	4.2.4	U		E	5.3.3
4	Transmitter minimum output power	4.2.5	U		E	5.3.4
5	Receiver Adjacent Channel Selectivity (ACS)	4.2.6	U		E	5.3.5
6	Receiver blocking characteristics	4.2.7	U		E	5.3.6
7	Receiver spurious response	4.2.8	U		E	5.3.7
8	Receiver Intermodulation characteristics	4.2.9	U		E	5.3.8
9	Receiver spurious emissions	4.2.10	U		E	5.3.9

B.1.4 Test environment

Where a normal environment is required then the normal conditions shown in clauses B.1.2 and B.1.3 should be applied.

Where an extreme environment is required then the various combinations of extreme temperatures together with the extreme voltages shown in clauses B.1.2 and B.1.3 should be applied. The combinations are:

- ~~low extreme temperature/low extreme voltage (TL/VL);~~
- ~~low extreme temperature/high extreme voltage (TL/VH);~~
- ~~high extreme temperature/low extreme voltage (TH/VL);~~
- ~~high extreme temperature/high extreme voltage (TH/VH).~~

Harmonized Standard EN 301 908-2						
The following requirements and test specifications are relevant to the presumption of conformity under <u>the article 3.2</u> of the R&TTE Directive						
Requirement			Requirement Conditionality		Test Specification	
No	Description	Reference: Clause No	U/C	Condition	E/O	Reference: Clause No
10	Out-of-synchronization handling of output power	4.2.11	U		E	5.3.10
11	Transmitter adjacent channel leakage power ratio	4.2.12	U		E	5.3.11

Key to columns:**Requirement:**

No A unique identifier for one row of the table which may be used to identify a requirement or its test specification.

Description A textual reference to the requirement.

Clause Number Identification of clause(s) defining the requirement in the present document unless another document is referenced explicitly.

Requirement Conditionality:

U/C Indicates whether the requirement is to be *unconditionally* applicable (U) or is *conditional* upon the manufacturers claimed functionality of the equipment (C).

Condition Explains the conditions when the requirement shall or shall not be applicable for a technical requirement which is classified "conditional".

Test Specification:

E/O Indicates whether the test specification forms part of the Essential Radio Test Suite (E) or whether it is one of the Other Test Suite (O).

NOTE: All tests whether "E" or "O" are relevant to the requirements. Rows designated "E" collectively make up the Essential Radio Test Suite; those designated "O" make up the Other Test Suite; for those designated "X" there is no test specified corresponding to the requirement. The completion of all tests classified "E" as specified with satisfactory outcomes is a necessary condition for a presumption of conformity. Compliance with requirements associated with tests classified "O" or "X" is a necessary condition for presumption of conformity, although conformance with the requirement may be claimed by an equivalent test or by manufacturer's assertion supported by appropriate entries in the technical construction file.

Clause Number Identification of clause(s) defining the test specification in the present document unless another document is referenced explicitly. Where no test is specified (that is, where the previous field is "X") this field remains blank.

Annex C (informative): The EN title in the official languages

Language	EN title
Bulgarian	Електромагнитна съвместимост и въпроси на радиоспектъра (ERM); Базови станции (BS), ретранслатори и потребителски съоръжения (UE) за IMT-2000 трето поколение клетъчни мрежи; Част 2: Хармонизиран европейски стандарт (EN) за CDMA с директно разлят спектър (UTRA FDD) (UE), съгласно IMT-2000, покриващ съществени изисквания на член 3.2 от Директивата за радиосъоръжения и крайни далекосъобщителни устройства (R&TTE)
Czech	Elektromagnetická kompatibility a rádiové spektrum (ERM); Základnové stanice (BS), opakovače a uživatelská zařízení (UE) buňkových sítí IMT 2000 třetí generace; Část 2: Harmonizovaná EN pokrývající základní požadavky článku 3.2 Směrnice R&TTE na IMT-2000, CDMA s přímým rozptřením (UTRA FDD) (UE)
Danish	Elektromagnetisk kompatibilitet og radiospektrumanliggønder (ERM); Basisstationer, repeater og brugerudstyr (UE) for IMT-2000 tredje generations cellulær radionet; Del 2: Harmoniseret EN for IMT-2000, CDMA direkte spredt (UTRA FDD) (UE), der dækker de væsentlige krav i R&TTE direktivets artikel 3.2
Dutch	Elektromagnetische compatibiliteit en radiospectrumaangelegenheden; Basisstations (BS), Versterkers en gebruiksmateriaal (UE) voor IMT-2000 derde generatie cellulaire netwerken; Deel 2: Geharmoniseerde EN voor IMT-2000, CDMA Directe Verspreiding (UTRA FDD) (UE) welke invulling geeft aan de essentiële eisen van artikel 3.2 van de R&TTE richtlijn
English	Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third Generation cellular networks; Part 2: Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD) (UE) covering essential requirements of article 3.2 of the R&TTE Directive
Estonian	Elektromagnetilise ühilduvuse ja raadiospektri küsimused (ERM); Kolmanda põlvkonna mobiilsidevõrgu IMT-2000 baasjaamad (BS), repiiterid ja kasutajaseadmed (UE); Osa 2: IMT-2000; otsese hajutamisega CDMA (UTRA FDD) (UE) harmoniseeritud EN R&TTE direktiivi artikli 3.2 põhinõuete alusel
Finnish	Gähkömagneettinen yhteensopivuus ja radiospektriasiat (ERM); IMT-2000 kolmannen sukupolven matkaviestinjärjestelmien tukiasemat (BS), toistimet ja päätelaitteet (UE); Osa 2: R&TTE-direktiivin artiklan 3.2 mukaiset olennaiset vaatimukset kattava yhdenmukaistettu standardi IMT-2000 CDMA suorasekvenssihajaspäätelaitteille (UTRA FDD) käyttäville päätelaitteille (UE)
French	Télécommunications – GEM et spectre radioélectrique (ERM) – Stations de base (BS) Répéteur et équipement usager (UE) pour les réseaux cellulaires de troisième génération IMT-2000 – Partie 2 : norme harmonisée pour IMT-2000, CDMA en séquence directe (UTRA FDD) couvrant les exigences essentielles de l'article 3.2 de la Directive R&TTE
German	Elektromagnetische Verträglichkeit und Funkspektrumsachen (ERM); Feststationen (BS) und Einrichtungen für den Nutzer (UE) für digitale zellulare IMT-2000 Funknetze der 3. Generation; Teil 2: Harmonisierte Norm für IMT-2000, CDMA Direkt Spreizspektrum Einrichtungen (UTRA FDD) für den Nutzer (UE) mit wesentlichen Anforderungen nach R&TTE Richtlinie Artikel 3.2
Greek	Ηλεκτρομαγνητική Συμβατότητα και Θέματα Ραδιοφάσματος (ERM) – Σταθμοί βάσης (BS); Επανάληψες και Εξοπλισμός Χρήστη (UE) για κυψελοειδή δίκτυα τρίτης γενιάς IMT-2000 – Μέρος 2: Εναρμονισμένο EN για IMT-2000, CDMA Αρκεσης Εξάπλωσης (UTRA FDD) (UE) για την κάλυψη των ουσιαστικών απαιτήσεων του άρθρου 3.2 της Οδηγίας R&TTE
Hungarian	Elektromágneses összeférhetőségi és rádióspektrumügyek (ERM); Az IMT-2000 harmadik generációs, cellás hálózatainak bázisállomásai (BS), átjátszói és felhasználói berendezései (UE); 2. rész: Az IMT-2000 közvetlen kiterjesztésű CDMA (UTRA FDD) (UE) berendezéseire vonatkozó, az R&TTE irányelv 3. cikk (2) bekezdésének alapvető követelményeit tartalmazó, harmonizált európai szabvány
Icelandic	Þættir sem varða rafsegulviðsamhæfi og fjarskiptatíðni (ERM); Fastastöðvar (BS) og notendabúnaður (UE) fyrir IMT-2000 hólfskipt fjarskiptakerfi af þriðju kynslóð, 2. hluti: Samræmdur Evrópustaðall um IMT-2000 CDMA Direct Spread (UTRA FDD) (notendabúnað) sem varðar grunnkröfur 2. mgr. 3. gr. í tilskipun 1999/5/EG um fjarskiptabúnað og endabúnað til fjarskipta
Italian	Compatibilità elettromagnetica e problematiche di Spettro Radio (ERM); Stazioni Base (BS) e Terminali Mobili (UE) per le reti cellulari di terza generazione IMT-2000; Parte 2: Norma armonizzata per IMT-2000, CDMA Direct Spread (UTRA FDD) (UE), relativa ai requisiti essenziali dell'articolo 3.2 della Direttiva R&TTE
Latvian	Elektromagnētiskā saderība un radiofrekvenču spektra jautājumi (ERM) – IMT-2000 trešās paaudzes ēnu tīklu bāzes stacijas (BS), rētranslatori un lietotāja iekārtas (UE) – 2.daļa: Harmonizēts IMT-2000 tiešās secības CDMA (UTRA FDD) (UE) Eiropas standarts (EN), kas atbilst R&TTE Direktīvas 3.2.punkta būtiskām prasībām

Annex B (normative): Environmental profile

B.1 General

B.1.1 Introduction

This normative annex specifies the environmental profile of the UE.

B.1.2 Temperature

The UE should fulfil all the requirements in the full temperature range as given in table B.1.2.1.

Table B.1.2-1: Temperatures

Range	Conditions
+15 °C to +35 °C	For normal conditions (with relative humidity of 25 % to 75 %)
-10 °C to +55 °C	For extreme conditions (see IEC 60068-2-1 [6] and IEC 60068-2-2 [7])

The low and high extreme temperature conditions are denoted as TL (temperature low, -10 °C) and TH (temperature high, +55 °C).

B.1.3 Voltage

The UE should fulfil all the requirements in the full voltage range, i.e. the voltage range between the extreme voltages.

The supplier should declare the lower and higher extreme voltages and the approximate shutdown voltage. For the equipment that can be operated from one or more of the power sources listed in table B.1.3-1, the lower extreme voltage should not be higher, and the higher extreme voltage should not be lower than that specified in table B.1.3-1.

Table B.1.3-1: Power sources

Power source	Lower extreme voltage	Higher extreme voltage	Normal conditions voltage
AC mains	0,9 × nominal	1,1 × nominal	Nominal
Regulated lead acid battery	0,9 × nominal	1,3 × nominal	1,1 × nominal
Non regulated batteries:			
<u>Leclanché</u>	<u>0,85 × nominal</u>	<u>nominal</u>	<u>nominal</u>
<u>Lithium</u>	<u>0,95 × nominal</u>	<u>1,1 × nominal</u>	<u>1,1 × nominal</u>
<u>Mercury/nickel and cadmium</u>	<u>0,90 × nominal</u>	<u>nominal</u>	nominal

Language	EN title
Lithuanian	Elekromagnetinio suderinamumo ir radijo dažnių spektro dalykai. Trečiosios kartos kominių tinklų IMT 2000 bazinės stotys (BS), kartotuvai ir vartotojo įranga (V). 2 dalis. Darnusis IMT 2000, GMDA tiesioginės sklaidos (UTRA FDD) (V) Europos standartas, apimantis esminius 1999/5/EG direktyvos 3.2 straipsnio reikalavimus
Maltese	Kompatibilità elettromanjetika u materji relatati ma' spettru radjofoniku (ERM), Stazzjonijiet Bażi (BG), Ripetituri u Tagħmir ta' Utenti (UE) ta' networks ċellulari tat-Tielet Ġenerazzjoni IMT 2000; Parti 2: EN armonizzata għal IMT 2000, Tixrid Dirett GDMA (UTRA FDD) (UE) li jkopri rekwiżiti essenzjali taft l-artikolu 3.2 tad-Direttiva R&TTE
Norwegian	Elekromagnetisk kompatibilitet og radiospektrumspørsmål (ERM), Basestasjoner (BG) og brukerstyr (UE) for IMT 2000 tredjegenersjons celledette nett: Del 2: Harmonisert EN for IMT 2000, direkte-spredt CDMA (UTRA FDD) (UE) som dekker de grunnleggende krav i R&TTE-direktivets artikkel 3.2
Polish	Kompatybilność elektromagnetyczna i zagadnienia widma radiowego (ERM) – Stacje bazowe (BG), stacje przekaźnikowe i urządzenia użytkownika (UE) dla sieci komórkowych trzeciej generacji IMT 2000 – Część 2: Zharmonizowana EN dla IMT 2000 CDMA z rozproszaniem bezpośrednim (UTRA FDD) (UE) zapewniająca spełnienie zasadniczych wymagań zgodnie z artykułem 3.2 dyrektywy R&TTE
Portuguese	Assuntos de Espectro Radioelétrico e Compatibilidade Electromagnética (ERM), Estações de Base (BG), Repetidores e Equipamento de Utilizador (UE) para redes celulares de terceira geração IMT 2000; Parte 2: EN Harmonizada para IMT 2000, Espalhamento Directo CDMA (UTRA FDD) (UE), cobrindo os requisitos essenciais no âmbito do artigo 3.º, n.º 2, da Directiva R&TTE
Romanian	Compatibilitate electromagnetică și probleme de spectru radio (ERM), Stații de bază (BG) și echipamente de utilizator (UE) pentru rețele celulare de a treia generație IMT2000; Partea 2: EN armonizat pentru IMT2000, CDMA cu împrăștiere directă (UTRA FDD) (UE) acoperind cerințele esențiale ale Articolului (3)(2) al Directivei R&TTE
Slovak	Elekromagnetická kompatibilita a závislosti rádiového spektra (ERM). Základňové stanice (BG), opakovače a používateľské zariadenia (UE) bunkových sietí tretej generácie IMT 2000. Časť 2: Harmonizovaná EN na IMT 2000 CDMA s priamym rozprestretím (UTRA FDD) (UE), vzťahujúca sa na základné požiadavky podľa článku 3.2 smernice R&TTE
Slovenian	Elekromagnetna združljivost in zadeve v zvezi z radijskim spektrom (ERM) – Bazne postaje (BG), ponavljalniki (repetitorji) in uporabniška oprema (UE) za celična omrežja tretje generacije IMT 2000 – 2. del: Harmonizirani EN za IMT 2000, CDMA z neposrednim razprševanjem ("Direct Spread") (UTRA FDD) (UE), ki zajema bistvene zahteve člena 3.2 direktive R&TTE
Spanish	Cuestiones de Compatibilidad Electromagnética y Espectro de Radiofrecuencia (ERM). Estaciones de Base (BG), Repetidores y Equipos de Usuario (UE) de redes celulares de Tercera Generación IMT 2000; Parte 2: Norma Europea (EN) armonizada para IMT 2000, CDMA con espectro ensanchado de secuencia directa (UTRA FDD) (UE), cubriendo los requisitos esenciales según el artículo 3.2 de la Directiva R&TTE
Swedish	Elekromagnetisk kompatibilitet och radio-spektrumfrågor (ERM), Basstationer (BG), repeatrar och Mobilstationer (UE) för tredje generationens mobilnät IMT 2000; Del 2: Harmoniserad EN för IMT 2000, CDMA med direktspredning (UTRA FDD) (UE) omfattande väsentliga krav enligt artikel 3.2 i R&TTE-direktivet

B.1.4 Test environment

Where a normal environment is required then the normal conditions shown in clauses B.1.2 and B.1.3 should be applied.

Where an extreme environment is required then the various combinations of extreme temperatures together with the extreme voltages shown in clauses B.1.2 and B.1.3 should be applied. The combinations are:

- Low extreme Temperature/Low extreme Voltage (TL/VL);
- Low extreme Temperature/High extreme Voltage (TL/VH);
- High extreme Temperature/Low extreme Voltage (TH/VL);
- High extreme Temperature/High extreme Voltage (TH/VH).

~~Annex D (informative): Bibliography~~

- ~~Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.~~
- ~~Directive 2004/108/EC of the European Parliament and of the Council of 15 December 2004 on the approximation of the laws of the Member States relating to electromagnetic compatibility and repealing Directive 89/336/EEC (text with EEA relevance (EMC Directive).~~
- CEPT/ERC/REC 74-01E (Siófok 1998, Nice 1999, Sesimbra 2002, Hradec Kralove 2005): "Unwanted emissions in the spurious domain".
- ~~ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of candidate Harmonized Standards for application under the R&TTE Directive".~~

Annex C (informative): The EN title in the official languages

The enlargement of the European Union (EU) resulted in a requirement from the EU for a larger number of languages for the translation of the titles of Harmonized Standards and mandated ENs that are to be listed in the Official Journal to support the implementation of this legislation.

For this reason the title translation concerning the present document can be consulted via the [e-approval](#) application.

History

Document history		
V1.1.1	January 2002	Publication
V2.2.1	October 2003	Publication
V3.2.1	June 2006	Public Enquiry PE 20061020: 2006-06-21 to 2006-10-20
V3.2.1	February 2007	Vote V 20070427: 2007-02-26 to 2007-04-27
V3.2.1	May 2007	Publication

Annex D (informative): Bibliography

Directive 2004/108/EC of the European Parliament and of the Council of 15 December 2004 on the approximation of the laws of the Member States relating to electromagnetic compatibility and repealing Directive 89/336/EEC (text with EEA relevance (EMC Directive).

CEPT/ERC/REC 74-01E (Siófok 1998, Nice 1999, Sesimbra 2002, Hradec Kralove 2005): "Unwanted emissions in the spurious domain".

Council Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of Member States relating to electrical equipment designed for use within certain voltage limits (L.V Directive).

History

Document history				
V1.1.1	January 2002	Publication		
V2.2.1	October 2003	Publication		
V3.2.1	<u>May 2007</u>	<u>Publication</u>		
<u>V4 1.1</u>	<u>April 2009</u>	<u>Public Enquiry</u>	<u>PE 20090828:</u>	<u>2009-04-30 to 2009-08-28</u>
<u>V4 1.2</u>	<u>December 2009</u>	<u>Vote</u>	<u>V 20100219:</u>	<u>2009-12-21 to 2010-02-19</u>
<u>V4 2.1</u>	<u>March 2010</u>	<u>Publication</u>		