



**ElectroMagnetic Compatibility (EMC)
standard for radio equipment and services;
Part 9: Specific conditions for wireless microphones,
similar Radio Frequency (RF) audio link equipment,
cordless audio and in-ear monitoring devices;
Harmonised Standard covering the essential requirements
of article 3.1(b) of Directive 2014/53/EU**

Reference

REN/ERM-EMC-341

Keywordsaudio, digital, EMC, harmonised standard, radio,
radio mic, regulation**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2019.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references	7
3 Definitions and abbreviations.....	7
3.1 Definitions	7
3.2 Abbreviations.....	7
4 Technical requirements specifications	8
4.1 Environmental Profile.....	8
4.2 Test conditions.....	8
4.2.1 Introduction	8
4.2.2 General	8
4.3 Arrangements for test signals.....	9
4.3.1 General.....	9
4.3.2 Arrangements for test signals at the input of transmitters	9
4.3.3 Arrangements for test signals at the output of transmitters	9
4.3.4 Arrangements for test signals at the input of receivers	9
4.3.5 Arrangements for test signals at the output of receivers.....	11
4.3.6 Arrangements for testing transmitter and receiver together (as a system).....	11
4.4 Exclusion bands	11
4.4.1 General	11
4.4.2 Receiver and receivers of transceivers exclusion band	11
4.4.3 Transmitter exclusion band	12
4.5 Narrow band responses of receivers	12
4.6 Normal test modulation	12
4.6.1 Void.....	12
4.6.2 Transmitters.....	12
4.6.3 Receivers	12
5 Performance assessment.....	13
5.1 General.....	13
5.2 Equipment which can provide a continuous communications link	13
5.3 Equipment which does not provide a continuous communications link	13
5.4 Ancillary equipment	13
5.5 Equipment classification	13
6 Performance criteria	13
6.1 Introduction.....	13
6.1.1 General	13
6.1.2 General performance criteria.....	14
6.2 Performance Requirements	14
6.2.1 Performance criteria for equipment which provides a continuous communication link	14
6.2.1.1 General	14
6.2.1.2 Performance criteria for Continuous phenomena applied to Transmitters (CT) and Receivers (CR).....	15
6.2.1.3 Performance criteria for Transient phenomena applied to Transmitters (TT) and Receivers (TR)	15
6.2.2 Performance criteria for equipment which does not provide a continuous communication link.....	16
6.2.3 Performance criteria for ancillary equipment tested on a stand alone basis	16
7 Applicability overview	16
7.1 Emission	16
7.1.1 General	16
7.1.2 Special conditions	16

7.2	Immunity	16
7.2.1	General	16
7.2.2	Special conditions	17
Annex A (informative):	Relationship between the present document and the essential requirements of Directive 2014/53/EU	18
Annex B (normative):	Acoustic stimulation of wireless radio microphones and similar radio communications link equipment, conditions for the test set up and configuration	20
B.1	General	20
B.2	Audio excitation	20
Annex C (informative):	Examples of wireless microphones, cordless audio, in-ear monitoring and similar RF audio link equipment within the scope of the present document	21
C.1	Wireless radio microphone equipment.....	21
C.2	Cordless audio equipment	21
C.3	RF audio link equipment covered within the scope of the present document.....	22
C.4	Low Power Band II Transmitters	22
Annex D (informative):	Bibliography.....	27
Annex E (informative):	Change History	28
History		29

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Harmonised European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.3] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.1].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive and associated EFTA regulations.

The present document is part 9 of a multi-part deliverable. Full details of the entire series can be found in part 1 [1].

National transposition dates	
Date of adoption of this EN:	8 May 2017
Date of latest announcement of this EN (doa):	31 July 2019
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 January 2020
Date of withdrawal of any conflicting National Standard (dow):	31 January 2021

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document, together with ETSI EN 301 489-1 [1], covers the assessment of wireless microphones, similar RF audio link equipment, cordless audio, including low power Band II transmitters and in-ear monitoring, intended for the transmission of music and speech, and associated ancillary equipment, in respect of ElectroMagnetic Compatibility (EMC).

Technical specifications related to the antenna port and emissions from the enclosure port of wireless microphones, similar RF audio link equipment, cordless audio and in-ear monitoring are not included in the present document. Such technical specifications are found in the relevant product standards for the effective use of the radio spectrum.

The present document specifies the applicable EMC tests, the test methods, the limits and the performance criteria for wireless microphones, similar RF audio link equipment, cordless audio, in-ear monitoring and associated ancillary equipment. This equipment can use analogue or digital modulation techniques.

Examples of equipment types covered by the present document are given in annex AC.

Other types of transmitters or receivers, which are intended for combined use, with either wireless radio microphones, RF audio link equipment, cordless audio and in-ear monitoring ~~shall~~will be tested to their appropriate EMC standard.

Low quality speech applications as toy ~~microphone~~microphones, babyphones etc. operating at frequencies below 50 MHz, occupied bandwidth < 25 kHz and operating according CEPT/ERC/REC 70-03 [i.2], annex 1 are excluded from the present document and are considered in ETSI EN 301 489-3 [i.4].

In case of differences (for instance concerning special conditions, definitions, abbreviations) between the present document and ETSI EN 301 489-1 [1], the provisions of the present document take precedence.

The environmental classification and the emission and immunity requirements used in the present document are as stated in ETSI EN 301 489-1 [1], except for any special conditions included in the present document.

The present document is aimed to cover requirements to demonstrate an adequate level of electromagnetic compatibility.

2 References

2.1 Normative references

References are specific, identified by date of publication and/or edition number or version number. Only the cited version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 301 489-1 (~~V1.6.1~~): "~~Electromagnetic compatibility and Radio spectrum Matters (ERM); V2.2.0) (03-2017): "ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU"~~".
- [2] ETSI EN 300 422-1 (~~V1~~V2.1.2.2): "~~Electromagnetic compatibility and Radio spectrum Matters (ERM);-) (01-2017): "Wireless microphones in the 25 MHzMicrophones; Audio PMSE up to 3 GHz frequency range; Part 1: Technical characteristics and test methods 1: Class A Receivers; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU"~~".
- [3] ETSI EN 300 454-1 (V1.1.2) (08-2000): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Wide band audio links; Part 1: Technical characteristics and test methods".

- [4] ETSI EN 301 357-1 (V1.34.1) (11-2008): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Cordless audio devices in the range 25 MHz to 2 000 MHz; Part 1: Technical characteristics and test methods".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.
- [i.2] CEPT/ERC/REC 70-03 (05-2007/09-2015): "Relating to the use of Short Range Devices (SRD)".
- [i.3] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.
- [i.4] ETSI EN 301 489-3 (V2.1.1) (06-2018): "ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ETSI EN 301 489-1 [1] and the following apply:

companding: method of audio processing that compresses the audio dynamic range before transmission and then provides matching expansion of the signal in the receiver

NOTE: The method is used to improve the audio performance in the RF link.

integral antenna: antenna designed to be connected to the equipment without the use of a 50 Ω external connector and considered to be part of the equipment

NOTE: An integral antenna may be fitted internally or externally to the equipment.

low power band 2 transmitters: Band II LPD (low power devices) up to 200 kHz bandwidth and analogue modulation

switching range: maximum frequency range over which the receiver or transmitter can be operated without reprogramming or realignment

vehicle battery power supply: battery used for the primary operation of the vehicle, i.e. the ignition or starting of the vehicle

3.2 Abbreviations

For the purposes of the present document, the following abbreviations given in ETSI EN 301 489-1 [1] and the following apply:

CR Continuous phenomena applied to Receivers

CT	Continuous phenomena applied to Transmitters
EMC	Electromagnetic Compatibility
e.r.p.	effective radiated power
<u>EMC</u>	<u>ElectroMagnetic Compatibility</u>
EUT	Equipment Under Test
LPD	Low Power Device
PMR	Professional Mobile Radio
RF	Radio Frequency
SINAD	Ratio of (Signal + Noise + Distortion) to (Noise + Distortion)
TR	Transient phenomena applied to Receivers
TT	Transient phenomena applied to Transmitters

4 Technical requirements specifications

4.1 Environmental Profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the manufacturer. The equipment shall comply with all the technical requirements of the present document which are identified as applicable in annex A at all times when operating within the boundary limits of the declared operational environmental profile.

4.2 Test conditions

4.2.1 Introduction

For the purposes of the present document, the test conditions of ETSI EN 301 489-1 [41], clause 4 shall apply as appropriate. Further product related test conditions for wireless microphones, similar RF audio link equipment, cordless audio, in-ear monitoring equipment and ancillary equipment are specified in the present document.

4.2.2 General

For emission and immunity tests the test modulation, test arrangements, etc., as specified in the present document, clauses 4.42 to 4.56 shall apply.

For the purpose of EMC tests, body worn or hand held transmitters shall be mounted on a non-conductive stand at least 0,8 m from any conducting surface. The EUT and any other equipment required for the performance assessment before, during, and after the conclusion of the tests, shall be connected in a manner typical of normal intended use.

Whenever the EUT is provided with a detachable antenna, it shall be tested with the antenna fitted in a manner typical of normal intended use.

For immunity tests, if the equipment is of a category which permits it, a communications link shall be established at the start of the test and maintained during the test.

The test conditions shall be as follows:

- –the transmitter shall be operated at its normal maximum RF output power modulated with a suitable modulation signal (see clause 4.56.1);
- –for stand alone receivers or receivers of transceivers operating in simplex mode, the wanted RF input signal, coupled to the receiver, shall be modulated with a suitable modulation signal (see clause 4.56.2);
- –for duplex transceivers, the wanted RF input signal, coupled to the receiver, shall be modulated with a suitable modulation signal (see clause 4.56.2). The transmitter shall be operated at its normal maximum output power, modulated with the test modulation signal, coupled to the transmitter from the output of the receiver (repeater mode);
- –digitally modulated systems shall use a defined interface to convert between analogue and digital domain (and vice versa).

4.23 Arrangements for test signals

4.3.1 General

The provisions of ETSI EN 301 489-1 [1], clause 4.2 shall apply.

4.3.2.4 Arrangements for test signals at the input of transmitters

The provisions of ETSI EN 301 489-1 [1], clause 4.2.1 shall apply with the following modifications.

For transmitters designed to operate from an integral or dedicated microphone (see figure 2) it shall be permissible to use an acoustic coupling device to inject the normal test modulation signal (see figure 3). The acoustic coupling device may be provided by the manufacturer.

For equipment which can use a variety of audio capsules, the manufacturer shall declare the type of capsule, e.g. dynamic, electret, or condenser, to be provided with the system. Only one type of capsule shall be tested. All other capsules shall be deemed as compliant. The transmitter shall be tested at its most sensitive input with the test capsule.

For equipment not designed to use an integral or dedicated microphone, the test signal shall be fed in electrical form to the most sensitive input socket (see figure 1) using maximum length cables as normally supplied by the manufacturer with the equipment.

The modulation signal used for the tests shall be a 1 kHz sine wave tone at a level declared by the manufacturer to obtain 100 % audio modulation.

The manufacturer may provide a suitable companion receiver that can be used to set up a communications link. In this case a suitable attenuator in the companion receiver input may be necessary, see annex B for further details.

In the case of systems with a digital audio input and outputs this test signal has to be presented via a suitable test fixture converting the analogue signal to the digital domain and vice-versa. The applicant shall provide details on the interface and test fixture used for the test.

4.2.23.3 Arrangements for test signals at the output of transmitters

The provisions of ETSI EN 301 489-1 [1], clause 4.2.2 shall apply.

4.2.3.4 Arrangements for test signals at the input of receivers

The provisions of ETSI EN 301 489-1 [1], clause 4.2.3 shall apply with the following modifications.

The wanted RF input signal to the receiver should be modulated with a suitable signal corresponding to 100 % audio modulation (maximum channel loading). If it is not appropriate to provide a modulated RF signal to the receiver, the test may be performed using an unmodulated wanted RF input signal.

The level and make up of the wanted RF input signal shall be declared by the manufacturer. The level chosen shall be set to a value 60 dB above the threshold sensitivity of the receiver. Other systems than analogue radio microphones can define another level more in line with the application. The level used shall be recorded in the test report.

The manufacturer may provide a suitable companion transmitter that can be used to set up a communications link. In this case a suitable attenuator in the EUT input may be necessary.

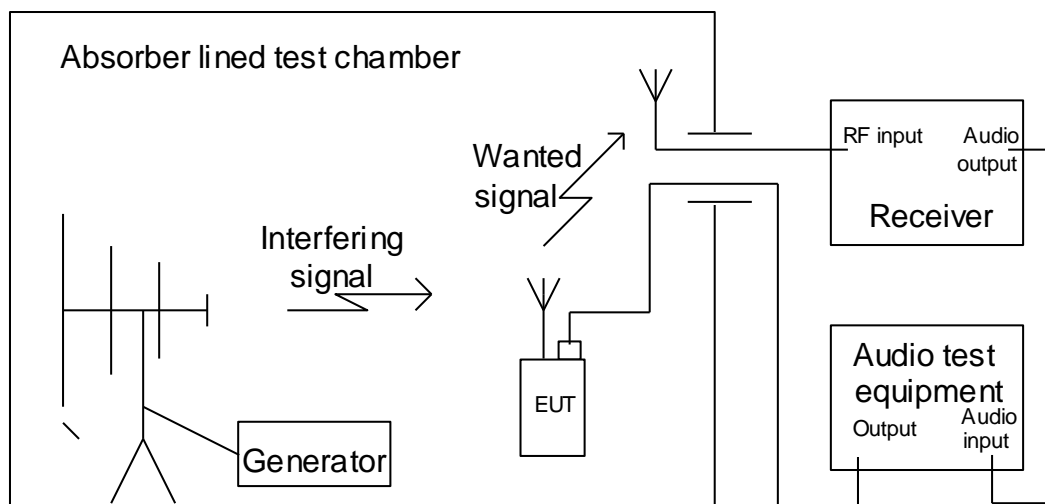


Figure 1: Test configuration for integral antenna; transmitter operation - electrical input

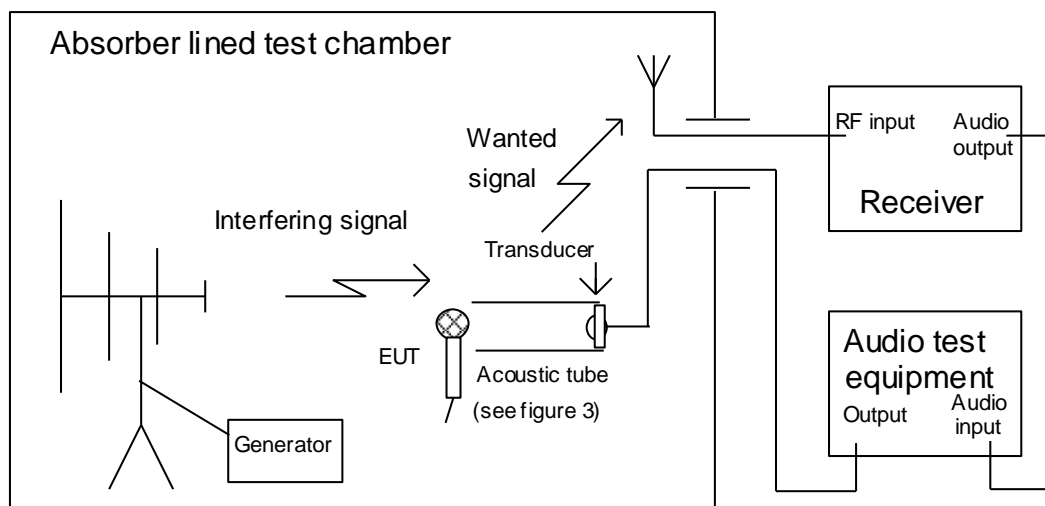


Figure 2: Test configuration for integral antenna; transmitter operation - acoustic input


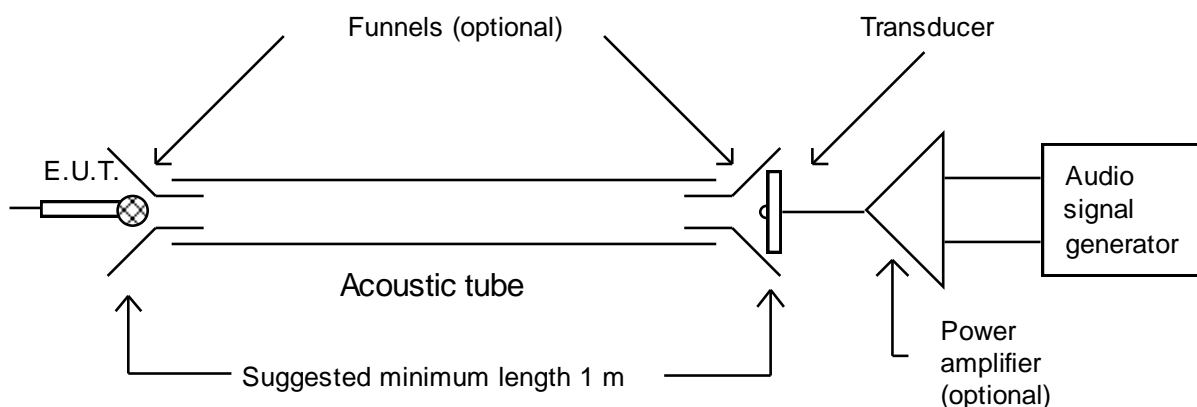


Figure 3: Example of acoustic coupling jig

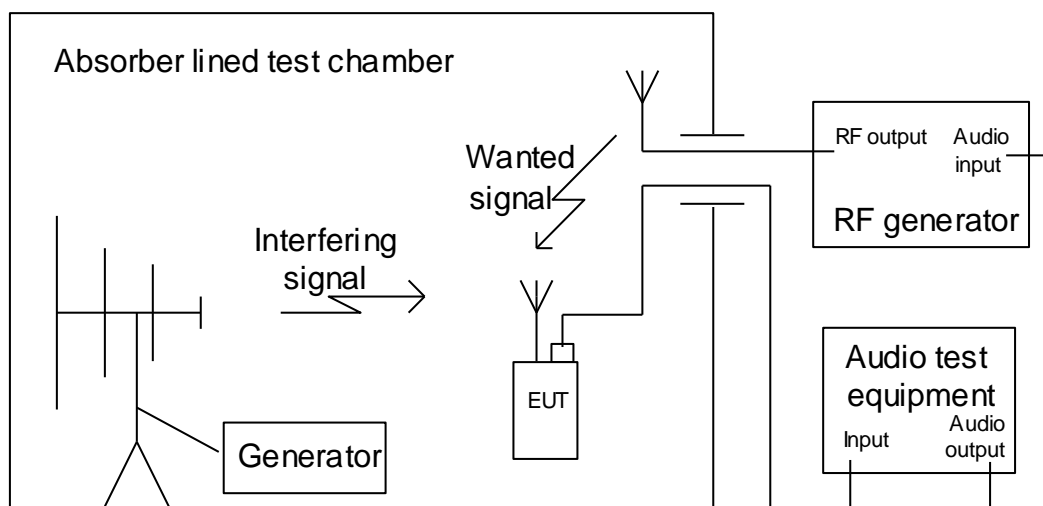

NOTE: The RF generator may be a companion transmitter sited inside the test chamber if necessary.

Figure 4: Test configuration for integral antenna; receiver operation

4.2.43.5 Arrangements for test signals at the output of receivers

The provisions of ETSI EN 301 489-1 [1], clause 4.2.4 shall apply with the following modification.

The audio frequency output of the equipment shall be suitably coupled to the SINAD measuring system outside of the test environment. The characteristics of the SINAD measuring system shall be such that the upper -3 dB frequency of its detector part is to exceed 16 kHz, and its electrical measurement flatness error between 40 Hz and 16 kHz is not to exceed ± 2 dB. The coupling means actually used shall be recorded in the test report.

In the case of systems with a digital audio output a suitable test fixture to convert from digital to analogue signals shall be defined by the applicant. The applicant shall provide details on the interface and test fixture used for the test. The interface shall be capable to meet the above specifications.

4.2.53.6 Arrangements for testing transmitter and receiver together (as a system)

The provisions of ETSI EN 301 489-1 [1], clause 4.2.5 shall apply.

In case of digitally modulated systems, the applicant shall define suitable test fixtures for converting from the analogue to the digital domain and vice versa. This definition shall be included in the test report.

4.34 Exclusion bands

4.4.1 General

The provisions of ETSI EN 301 489-1 [1], clause 4.3 shall apply.

4.3.14.2 Receiver and receivers of transceivers exclusion band

The exclusion band for receivers and receivers of transceivers is the frequency range determined by the switching range, as declared by the manufacturer, extended as follows:

- 1) Category 1 and 2 equipment (as defined in clause 6):
 - the lower frequency of the exclusion band is the lower frequency of the switching range, minus 5 % of the centre frequency of the switching range;
 - the upper frequency of the exclusion band is the upper frequency of the switching range, plus 5 % of the centre frequency of the switching range.

2) Category 3 equipment (as defined in clause 6):

- the lower frequency of the exclusion band is the lower frequency of the switching range, minus 5 % of the centre frequency of the switching range, or minus 10 MHz, whichever will result in the lowest frequency;
- the upper frequency of the exclusion band is the upper frequency of the switching range, plus 5 % of the centre frequency of the switching range, or plus 10 MHz, whichever will result in the highest frequency.

The manufacturer shall state the category of equipment on the documentation accompanying the product, and shall declare the category to the test house in the form of a manufacturer's declaration.

4.4.3.2 Transmitter exclusion band

The lower frequency of the exclusion band is the lower frequency of the switching range, minus 5 % of the centre frequency of the switching range.

The upper frequency of the exclusion band is the upper frequency of the switching range, plus 5 % of the centre frequency of the switching range.

4.45 Narrow band responses of receivers

The provision of ETSI EN 301 489-1 [1], clause 4.4 shall apply.

The identification criterion for narrow band responses of the EUT is a reduction of the observed SINAD level of the audio output below the relevant category limit set out in table 2, see clause 6.2.

The nominal frequency offset used for the identification of narrowband responses shall be twice the bandwidth of the receiver IF filter immediately preceding the demodulator, as declared by the manufacturer, for the first part of the identification procedure, and two and one half times the bandwidth of the receiver for its second part.

For digital systems the narrowband response shall be limited to less than 3 times the declared bandwidth (B) of the system. See ETSI EN 300 422-1 [2], ETSI EN 300 454-1 [3] and ETSI EN 301 357-1 [4].

4.56 Normal test modulation

4.56.1 Void

4.6.2 Transmitters

The transmitter shall be modulated with a sinusoidal audio frequency signal of 1 000 Hz, provided either by a suitable acoustic coupling means or by a shielded transmission line (e.g. a coaxial cable). The level of this audio signal shall be adjusted corresponding to 100 % audio modulation (maximum channel loading) of the wanted RF carrier.

For digitally modulated systems the applicant shall specify the modulation method and its parameters and provide a suitable test fixture to allow for testing similar to 100 % audio modulation level.

4.5.26.3 Receivers

The ~~receivers~~ receiver's wanted RF input signal shall be set to the operation frequency of the receiver within the designated operation frequency band and modulated with a sinusoidal audio frequency of 1 000 Hz, provided either by a test antenna located within the test environment (integral antenna receivers) or a shielded transmission line such as a coaxial cable (non-integral antenna receivers). The level of the modulation signal shall be adjusted resulting in 100 % audio modulation (maximum channel loading) of the receivers wanted RF input signal.

For digitally modulated systems the applicant shall specify the modulation method and its parameters and provide a suitable test fixture to allow for testing similar to 100 % audio modulation level.

5 Performance assessment

5.1 General

The provision of ETSI EN 301 489-1 [1], clause 5.1 shall apply with the following modification.

In addition, the manufacturer shall at the time of submission of the equipment for test, supply the following information to be recorded in the test report:

- –the applicable equipment category (category 1, 2 or 3) according to clause 6;
- –the coupling means to be used for the application of the modulation signal to the EUT and for monitoring the output of the EUT;
- –the level and make up of the RF test signal for the establishment of the communications link;
- –description of test fixtures, e.g. for converting from the analogue to the digital domain or vice versa.

5.2 Equipment which can provide a continuous communications link

The provision of ETSI EN 301 489-1 [1], clause 5.2 shall apply.

5.3 Equipment which does not provide a continuous communications link

The provision of ETSI EN 301 489-1 [1], clause 5.3 shall apply.

5.4 Ancillary equipment

The provision of ETSI EN 301 489-1 [1], clause 5.4 shall apply.

5.5 Equipment classification

The provision of ETSI EN 301 489-1 [1], clause 5.5 shall apply.

6 Performance criteria

6.1 Introduction

6.1.1 General

The product family of wireless microphones and similar RF audio link equipment and associated ancillary equipment is divided into three categories of equipment, each having its own set of performance criteria:

- –**Category 1 equipment** comprises wireless microphones, similar RF audio link equipment, and associated ancillary equipment intended for **professional applications**.
- –**Category 2 equipment** comprises consumer wireless microphones, cordless audio devices, in-ear monitoring devices and associated ancillary equipment intended for **domestic entertainment**.
- –**Category 3 equipment** comprises consumer wireless microphones, cordless audio, wireless headphones and associated ancillary equipment intended for **general consumer purposes**.
- –The information required to enable use in accordance with the intended purpose of the product, declared as "professional applications" (Category 1), "domestic entertainment" (Category 2), or "general consumer" (Category 3), shall be contained in the accompanying user product documentation.

The establishment of the communication link at the start of the test, its maintenance and the assessment of the recovered signal (e.g. audio output) are used as the performance criteria for the evaluation of the essential functions of the equipment during and after the test.

The performance criteria A, B, and C set out in table 1 shall be used in the following manner:

- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;
- performance criteria C for immunity tests with power interruptions and voltage dips exceeding a certain period of time.

6.1.2 General performance criteria

The equipment shall meet the performance criteria specified in table 1, as detailed in the special performance criteria in clauses 6.2, 6.3 or 6.4, as appropriate.

Table 1: General performance criteria

During test	After test	Criteria
Operate as intended; Degradation of performance (see note 1); No loss of function.	Operate as intended; No degradation of performance (see note 2); No loss of function.	A
Loss of function (one or more).	Operate as intended; No degradation of performance (see note 2); Functions self-recoverable.	B
Loss of function (one or more).	Operate as intended; No degradation of performance (see note 2); Functions recoverable by the operator.	C
<p>NOTE 1: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the permissible degradation of performance is not specified by the manufacturer, then this may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.</p> <p>NOTE 2: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible degradation of performance is not specified by the manufacturer, then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.</p>		

6.2 Performance Requirements

6.2.1 Performance criteria for equipment which provides a continuous communication link

6.2.1.1 General

The establishment of the communications link at the start of the test, the maintenance of the communications link and the assessment of the recovered signal information, e.g. an audio signal, shall be used as the performance criteria to ensure that the essential functions of the transmitter and/or receiver are evaluated during and after the test.

The equipment shall meet the minimum performance criteria as specified for the appropriate category of equipment in clauses 6.2.1.1 and 6.2.1.2.

6.2.1.2 Performance criteria for Continuous phenomena applied to Transmitters (CT) and Receivers (CR)

The following performance criteria for continuous phenomena apply for transmitters (CT) and receivers or receiver parts of simplex or duplex transceivers (CR) permitting the establishment of a continuous communications link:

- ~~before the test it shall be verified that the EUT, when coupled through the test equipment and not subjected to EMC stress is capable of producing a SINAD figure of at least 3 dB above the category limit specified in table 2;~~
- ~~before the test it shall be verified that the EUT, when coupled through the test equipment and not subjected to EMC stress is capable of producing a SINAD figure of at least 3 dB above the category limit specified in table 2;~~
- during each individual exposure in the test sequence it shall be verified, by appropriate means supplied by the manufacturer, that the communications link is maintained;
- at the conclusion of the test the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communications link shall have been maintained during the test.

During and after the tests the audio output shall be monitored and assessed. During the test, the SINAD of the audio output shall not result in levels below the relevant category limit specified in table 2. After the test, the SINAD shall recover to that level recorded before the test or at least to levels not below the relevant category limit specified in table 2.

Table 2: Continuous phenomena, minimum performance criteria

Equipment category	Minimum performance criterion	Intended use
Category 1	30 dB SINAD	Professional applications
Category 2	20 dB SINAD	Domestic entertainment
Category 3	6 dB SINAD	General consumer

Where the EUT is a transmitter only, and a stand-by mode of operation is provided, the tests shall be repeated with the EUT in stand-by mode of operation to ensure that unintentional transmission does not occur.

Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

6.2.21.3 Performance criteria for Transient phenomena applied to Transmitters (TT) and Receivers (TR)

The following performance criteria for transient phenomena apply for transmitters (TT) and receivers or receiver parts of simplex or duplex transceivers (TR) permitting the establishment of a continuous communications link:

- ~~before the test it shall be verified that the EUT, when coupled through the test equipment and not subjected to EMC stress is capable of producing a SINAD figure of at least 3 dB above the category limit specified in table 2;~~
- ~~before the test it shall be verified that the EUT, when coupled through the test equipment and not subjected to EMC stress is capable of producing a SINAD figure of at least 3 dB above the category limit specified in table 2;~~
- at the conclusion of each exposure in the test sequence the EUT shall operate with no user noticeable loss of the communications link;
- at the conclusion of the total test comprising of a series of individual exposures the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communications link shall have been maintained during the test.

After the tests the audio output shall be monitored and assessed. After the test the SINAD shall recover to that level recorded before the test or at least to levels not below the relevant category limit specified in table 2.

Where the EUT is a transmitter only, and a stand-by mode of operation is provided, the tests shall be repeated with the EUT in stand-by mode of operation to ensure that unintentional transmission does not occur.

Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

6.32.2 Performance criteria for equipment which does not provide a continuous communication link

The provisions of ETSI EN 301 489-1 [41], clause 6.3 shall apply with the following modifications.

For immunity tests with continuous phenomena, equipment not permitting the establishment of a continuous communications link and ancillary equipment intended to be tested on a stand alone basis shall meet the following performance criteria:

- performance criteria A for category 1 equipment;
- performance criteria C for categories 2 and 3 equipment;

as specified in table 1.

For immunity tests with transient phenomena, equipment not permitting the establishment of a continuous communications link and ancillary equipment intended to be tested on a stand alone basis shall meet the performance criteria B as given in table 1, except for immunity tests with voltage dips and interruptions (see ETSI EN 301 489-1 [1], clause 9.7), where it is explicitly stated that the communications link need not be maintained in which case performance criteria C from table 1 shall apply.

6.42.3 Performance criteria for ancillary equipment tested on a stand alone basis

The provision of ETSI EN 301 489-1 [1], clause 6.4 shall apply.

7 Applicability overview

7.1 Emission

7.1.1 General

ETSI EN 301 489-1 [1], table 21, contains the applicability of EMC emission measurements to the relevant ports of radio and/or associated ancillary equipment.

7.1.2 Special conditions

The following special conditions set out in table 3, relate to the emission test methods used in ETSI EN 301 489-1 [1], clause 8.

Table 3: Special conditions for EMC emission measurements

Reference to clauses in ETSI EN 301 489-1 [1]	Special product-related conditions, additional to or modifying the test conditions in ETSI EN 301 489-1 [1], clause 8
8.1 Test configuration; Methods of measurement and limits for EMC emissions	The radio equipment shall be operated on one channel frequency, which is close to the middle of the switching range declared by the manufacturer. In transmit mode of operation, the transmitter shall be operated to obtain its maximum rated RF power.

7.2 Immunity

7.2.1 General

ETSI EN 301 489-1 [1], table 32, contains the applicability of EMC immunity measurements to the relevant ports of radio and/or associated ancillary equipment.

7.2.2 Special conditions

The following special conditions set out in table 4, relate to the immunity test methods and performance criteria used in ETSI EN 301 489-1 [1], clause 9.

Table 4: Special conditions for EMC immunity tests

Reference to clauses in ETSI EN 301 489-1 [1]	Special product-related conditions, additional to or modifying the test conditions in ETSI EN 301 489-1 [1], clause 9
9.1 Test configuration; Test methods and levels for immunity tests	For immunity tests of transmitters, the transmitter shall be operated at its maximum rated RF output power. The immunity tests shall be performed with the EUT successively set to all modes of operation available for the EUT.

Annex_A (informative): Relationship between the present document and the essential requirements of Directive 2014/53/EU

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.3] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.1].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive and associated EFTA regulations.

Table A.1: Relationship between the present document and the essential requirements of Directive 2014/53/EU

Harmonised Standard ETSI EN 301 489-9				
Requirement			Requirement Conditionality	
No	Description	Reference: Clause No	U/C	Condition
1	Emissions: Enclosure of ancillary equipment measured on a stand alone basis	8.2 of ETSI EN 301 489-1 [1]	U	
2	Emissions: DC power input/output ports	7.1.2	C	Only where equipment has DC power input and/or output ports with a cable length greater than 3 m or from a vehicle power supply [1]
3	Emissions: AC mains power input/output ports	7.1.2	C	Only where equipment has AC mains power input and/or output ports [1]
4	Emissions: Harmonic current emission (AC mains input port)	8.5 of ETSI EN 301 489-1 [1]	C	Only where equipment has AC mains power input ports
5	Emissions: Voltage fluctuations and flicker (AC mains input ports)	8.6 of ETSI EN 301 489-1 [1]	C	Only where equipment has AC mains power input ports
6	Emissions: Wired network ports	8.7 of ETSI EN 301 489-1 [1]	C	Only where equipment has wired network ports
7	Immunity: Radio frequency electromagnetic field (80 MHz to 6 000 MHz)	7.2.2 and 9.2 of ETSI EN 301 489-1 [1]	U	
8	Immunity: Electrostatic discharge	7.2.2 and 9.3 of ETSI EN 301 489-1 [1]	U	
9	Immunity: Fast transients common mode	7.2.2 and 9.4 of ETSI EN 301 489-1 [1]	C	Only where equipment has AC mains power input ports or other port intended to be used with cable longer than 3 m
10	Immunity: Radio frequency common mode	7.2.2 and 9.5 of ETSI EN 301 489-1 [1]	C	Only where equipment has AC mains power input ports or other port intended to be used with cable longer than 3 m
11	Immunity: Transients and surges in the vehicular environment	7.2.2 and 9.6 of ETSI EN 301 489-1 [1]	C	Only where equipment is connected to vehicle power supply
12	Immunity: Voltage dips and interruptions	7.2.2 and 9.7 of ETSI EN 301 489-1 [1]	C	Only where equipment has AC mains power input ports [1]
13	Immunity: Surges, line to line and line to ground	7.2.2 and 9.8 of ETSI EN 301 489-1 [1]	C	Only where equipment has AC mains power input ports and/or wired network ports

Key to columns:

Requirement:

No A unique identifier for one row of the table which may be used to identify a requirement.

Description A textual reference to the requirement.

Clause Number Identification of clause(s) defining the requirement in the present document unless another document is referenced explicitly.

Requirement Conditionality:

U/C Indicates whether the requirement is unconditionally applicable (U) or is conditional upon the manufacturer's claimed functionality of the equipment (C).

Condition Explains the conditions when the requirement is or is not applicable for a requirement which is classified "conditional".

Presumption of conformity stays valid only as long as a reference to the present document is maintained in the list published in the Official Journal of the European Union. Users of the present document should consult frequently the latest list published in the Official Journal of the European Union.

Other Union legislation may be applicable to the product(s) falling within the scope of the present document.

Annex B (normative): Acoustic stimulation of wireless radio microphones and similar radio communications link equipment, conditions for the test set up and configuration

B.1 General

This annex defines the methods of stimulating the EUT when carrying out the necessary EMC tests specified in the present document, in recognition of the rather unusual nature of radio microphones, as compared with the generality of radio products.

Radio microphones vary enormously in their sensitivity and acoustic directivity of their microphones.

In testing wireless radio microphones, it should be borne in mind that many products employ companding techniques.

In the event of difficulty, or uncertainty about the characteristics of the sample submitted for the EMC conformity testing, discussion with the manufacturer is encouraged.

B.2 Audio excitation

As part of the EMC test sequence specified in the present document it is necessary to provide an audio excitation signal to the microphone transducer. This may be achieved in at least two ways, as follows:

- 1) by means of an electro-acoustic resonator (in order to avoid distortion of the calibrated field, this shall be placed outside the physical area of calibration, and be non-metallic); or
- 2) by means of an acoustic tube (this may be rigid or flexible, but shall have an acoustically "hard" wall, be of non-conducting material, and be of constant inner diameter throughout its length).

The driver transducer shall be large enough, and excited strongly enough, to be able to deliver sufficient sound pressure at the microphone to fully excite the EUT's modulator. Overdrive shall however be avoided.

The driver transducer shall be placed well away from the EUT's microphone, (because it will ordinarily be a moving coil magnetic type), in order to avoid inter-transducer magnetic coupling, and in order to avoid distortion of the electromagnetic test field.

Coupling to the driver transducer, and to the EUT's microphone transducer, may be by means of funnels or other appropriate means. The attachments shall be fixed and firm throughout the test sequence.

When the transducer is coupled to the EUT by means of an acoustic tube, bends in the tube shall be avoided or minimized. Any bends in the tube shall always have a radius that is large in relation to the inner diameter of the tube. Standing waves in the tube may be overcome by lightly packed cotton wool damping pads placed at 150 mm intervals along the length of the tube. It is recommended that the driver transducer is located inside the test chamber, thus minimizing the length of the tube.

NOTE: In trials of this test method a tube length of 1 m has been successfully used. The tube was 12,5 mm bore plastic reinforced water hose. The driver transducer was a 75 mm car radio speaker, with a large ferrite magnet, capable of cone movement exceeding 10 mm peak-to-peak. The driver was coupled into the pipe by means of a domestic plastic funnel.

Annex C (informative):

Examples of wireless microphones, cordless audio, in-ear monitoring and similar RF audio link equipment within the scope of the present document

AC.1 Wireless radio microphone equipment

Wireless radio microphone equipment operates with a continuous RF output signal and normally is in continuous operation for a number of hours. The modulation can be analogue [2] or digital [5]-[2]. The transmitter typically operates at a maximum RF output power of 50 mW [22]. Wireless radio microphones are intended for professional use at theatres, shows, broadcast etc. and may be distinguished from other voice or speech communication equipment (e.g. PMR) by the following operational characteristics:

- –wider audio bandwidth;
- –higher audio signal to noise ratio;
- –lower audio frequency distortion.

Aids for the handicapped, tour guides systems, in-ear monitoring and similar constant RF devices operate in a similar manner to wireless microphones, but with variations of bandwidth and a reduced RF output power and possibly reduced quality of speech or voice signal transmission.

Consumer microphones are intended for domestic and consumer use in the band 863 MHz to 865 MHz. They are intended for unlicensed operation at 10 mW e.r.p. The present document applies to consumer microphones and in-ear monitoring equipment as defined in ETSI EN 301 357-1 [44]: Cordless audio devices in the range 25 MHz to 2 000 MHz, Consumer radio microphones and in ear monitoring systems in the CEPT ~~harmonized~~ harmonised band 863 MHz to 865 MHz.

~~Digital radiomicrophones are intended for professional applications such as theatres, onstage, broadcast etc. in the band 1 785 MHz to 1 800 MHz. The present document applies to digital radiomicrophones as defined in EN 301 840-1 [5]: digital wireless microphones in the 1 785 MHz to 1 800 MHz frequency range.~~

AC.2 Cordless audio equipment

Cordless audio equipment encompasses radio linked headphones and loudspeakers. The transmitters may be installed in a building, fitted in a vehicle or body worn. The term cordless is also used to describe infra red and other non-RF "wireless" links, but in the context of the present document it is restricted to RF operating systems only. Stereo analogue or digital equipment can be designed for required channel bandwidths of 300 kHz however multichannel equipment for e.g. surround sound systems may need higher bandwidths 600 kHz or 1 200 kHz as described in ETSI EN-301-357-1-[44].

In this class of operation, following applications can be identified (non-exhaustive list) [44]:

- **Cordless loudspeakers:** Cordless loudspeakers are used in a domestic or consumer environment and are used to allow wireless operation from audio or TV systems and alike.
- **Wireless headphones:** Wireless headphones are used in a domestic or consumer environment to allow wireless operation for audio and TV and alike.
- **In-ear monitoring:** In-ear monitoring equipment is used by stage and studio performers to receive personal fold back (monitoring) of the performance. This can be just their own voice or a complex mix of sources. This equipment is usually stereo or 2 channel audio.
- **Personal cordless:** Personal cordless transmitters are to enable the body worn personal stereo equipment to be wire free.
- **In-vehicle cordless:** In vehicle systems are used for private listening in automobiles and other methods of transport (where permitted).

- **Broadband multichannel applications:** Broadband multichannel systems are used for the transmission of high quality digital audio. These can e.g. surround sound systems or low/uncompressed audio. They are intended to be used in spectrum above 1 GHz and use bandwidths of typically 600 kHz or 1 200 kHz.

AC.3 RF audio link equipment covered within the scope of the present document

Wireless audio links are intended for professional use and operate at high RF power levels to bridge more operating range distance in outdoor use. They are used in spectrum identified by the National administration (licensed). The present document applies to RF audio link equipment as defined in ETSI EN 300 454-1 [33] operating in the 25 MHz to 3 GHz frequency range, and associated ancillary equipment.

AC.4 Low Power Band II Transmitters

Devices operating in the 87,5 MHz to 108 MHz range (Broadcasting Band II) that are typically used for the purpose of listening to MP3/CD players on a home or car Band II (FM) radio receiver.

~~Annex B (normative): Acoustic stimulation of wireless radio microphones and similar radio communications link equipment, conditions for the test set up and configuration~~

~~B.1 General~~

~~This annex defines the methods of stimulating the EUT when carrying out the necessary EMC tests specified in the present document, in recognition of the rather unusual nature of radio microphones, as compared with the generality of radio products.~~

~~Radio microphones vary enormously in their sensitivity and acoustic directivity of their microphones.~~

~~In testing wireless radio microphones, it should be borne in mind that many products employ companding techniques.~~

~~In the event of difficulty, or uncertainty about the characteristics of the sample submitted for the EMC conformity testing, discussion with the manufacturer is encouraged.~~

~~B.2 Audio excitation~~

~~As part of the EMC test sequence specified in the present document it is necessary to provide an audio excitation signal to the microphone transducer. This may be achieved in at least two ways, as follows:~~

- ~~1) — 1) — by means of an electro-acoustic resonator (in order to avoid distortion of the calibrated field, this shall be placed outside the physical area of calibration, and be non-metallic); or~~
- ~~2) — by means of an acoustic tube (this may be rigid or flexible, but shall have an acoustically "hard" wall, be of non-conducting material, and be of constant inner diameter throughout its length).~~

~~The driver transducer shall be large enough, and excited strongly enough, to be able to deliver sufficient sound pressure at the microphone to fully excite the EUT's modulator. Overdrive shall however be avoided.~~

~~The driver transducer shall be placed well away from the EUT's microphone, (because it will ordinarily be a moving coil magnetic type), in order to avoid inter-transducer magnetic coupling, and in order to avoid distortion of the electromagnetic test field.~~

~~Coupling to the driver transducer, and to the EUT's microphone transducer, may be by means of funnels or other appropriate means. The attachments shall be fixed and firm throughout the test sequence.~~

~~When the transducer is coupled to the EUT by means of an acoustic tube, bends in the tube shall be avoided or minimized. Any bends in the tube shall always have a radius that is large in relation to the inner diameter of the tube. Standing waves in the tube may be overcome by lightly packed cotton wool damping pads placed at 150 mm intervals along the length of the tube. It is recommended that the driver transducer is located inside the test chamber, thus minimizing the length of the tube.~~

~~NOTE: — In trials of this test method a tube length of 1m has been successfully used. The tube was 12,5 mm bore plastic reinforced water hose. The driver transducer was a 75 mm ear radio speaker, with a large ferrite magnet, capable of cone movement exceeding 10 mm peak to peak. The driver was coupled into the pipe by means of a domestic plastic funnel.~~

~~Annex C (informative):
The EN title in the official languages~~

Language	EN title
Bulgarian	Електромагнитна съвместимост и въпроси на радиоспектъра (ERM). Стандарт за електромагнитна съвместимост на радиосъоръжения и радиослужби. Част 9: Специфични условия за безжични микрофони и подобни радиочестотни (RF) съоръжения за звукова връзка, безжични устройства за звуков и слухов контрол
Czech	Elektromagnetická kompatibilita a rádiové spektrum (ERM) – Norma pro elektromagnetickou kompatibilitu (EMC) rádiových zařízení a služeb – Část 9: Specifické podmínky pro bezdrátové mikrofony a podobná zařízení vysokofrekvenčního (RF) zvukového spoje, bezšňůrová zvuková a příposlechová zařízení
Danish	Elektromagnetisk kompatibilitet og Radiospektrum Anliggender (ERM); Elektromagnetisk kompatibilitet (EMC) for radioudstyr og tjenester; Del 9: Særlige krav til trådløse mikrofoner, lignende radiofrekvent (RF) udstyr til audioforbindelser, trådløst audio og overvågningsudstyr placeret i øret
Dutch	Elektromagnetische compatibiliteit en radiospectrumaangelegenheden (ERM); Norm voor elektromagnetische compatibiliteit (EMC) voor radioapparatuur en diensten; Deel 9: Specifieke omstandigheden voor draadloze microfoons, audioverbindingapparatuur voor vergelijkbare radiofrequenties (RF) en controle-inrichtingen, draadloos geluidsapparatuur en kopectelefoons
English	Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 9: Specific conditions for wireless microphones, similar Radio-Frequency (RF) audio link equipment, cordless audio and in-ear monitoring devices
Estonian	Elektromagnetilise ühilduvuse ja raadiospektri küsimused (ERM); Raadioseadmete ja raadiosideteenistuste elektromagnetilise ühilduvuse (EMC) standard; Osa 9: Eritingimused raadiomikrofonidele ja sarnase raadiosagedusega (RF) audiolinkidele, juhtmeta-audioseadmetele ja kõrvamonitoreidele
Finnish	Sähkömagneettinen yhteensopivuus ja radiospektriasiat (ERM); Sähkömagneettinen yhteensopivuusstandardi radiolaitteille ja järjestelmille; Osa 9: Erityisehdot langattomille mikrofoneille ja vastaaville RF-audiolinkkilaitteille, johdottomille äänentarkkailulaitteille ja korvamonitoreille
French	Télécommunications – CEM et spectre radioélectrique (ERM) – Norme de compatibilité électromagnétique pour les équipements et les services radio – Partie 9 : conditions spécifiques pour les microphones sans fil et les appareils de liaison audio à fréquence radio (RF) similaire, la gestion des appareils audio sans fils et des écouteurs
German	Elektromagnetische Verträglichkeit und Funkspektrumangelegenheiten (ERM); Elektromagnetische Verträglichkeit für Funkeinrichtungen und -dienste (EMV) ; Teil 9: Spezifische Bedingungen für drahtlose Mikrofone, ähnliche Funkgeräte zur Übertragung von Audiosignalen und In-Ohr-Mithörgeräte
Greek	Ηλεκτρομαγνητική Συμβατότητα και Θέματα Ραδιοφάσματος (ERM) – Πρότυπο ηλεκτρομαγνητικής συμβατότητας (EMC) για ραδιοεξοπλισμό και ραδιοπηρεσίες – Μέρος 9: Ειδικές συνθήκες για ασύρματα μικρόφωνα, παρόμοιο ραδιοσυχνικό (RF) εξοπλισμό ακουστικής ζεύξης, ακόρδονο ακουστικό εξοπλισμό και ενδοωτικές συσκευές παρακολούθησης
Hungarian	Elektromágneses összeférhetőségi és rádióspektrumügyek (ERM). Rádióberendezések és szolgáltatók elektromágneses összeférhetőségi (EMC) szabványai. 9. rész: Vezeték nélküli mikrofonok, hasonló rádiófrekvenciás (RF) hangátviteli berendezések, zsinór nélküli hangfrekvenciás készülékek és fülbe helyezhető megfigyelőkészülékek sajátos feltételei
Icelandic	Þættir sem varða rafsegulsviðssamhæfi og fjarskiptatíðni (ERM); Staðall um rafsegulsviðssamhæfi (EMC) fyrir þráðlausan fjarskiptabúnað og þjónustu; 9. hluti: Sérstök skilyrði um þráðlausa hljóðnema, á móta útvarpstíðnibúnað fyrir hljóðfjarskiptaleiðir, snúrulaus hljómtæki og heyrnartólsvöktunartæki
Italian	Compatibilità elettromagnetica e questioni relative allo spettro delle radiofrequenze (ERM); norma di compatibilità elettromagnetica (EMC) per apparecchiature e servizi radio; Parte 9: Condizioni specifiche per microfoni senza filo, apparecchiature di collegamento audio a radiofrequenza (RF); apparati audio senza filo e auricolari di monitoraggio.
Latvian	Elektromagnētiskā saderība un radiofrekvenču spektra jautājumi (ERM); Radioiekārtu un pakalpojumu elektromagnētiskās saderības (EMC) standarts; 9. daļa: īpaši nosacījumi radiomikrofoniem, līdzīgu radiofrekvenču skaņas radiolīniju iekārtām, bezaukļas skaņas un pieauss kontrolierīcēm
Lithuanian	Elektromagnetinio suderinamumo ir radijo dažnių spektro dalykai. Radijo ryšio įrangos ir paslaugų elektromagnetinio suderinamumo (EMS) standartas. 9 dalis. Belaidžių mikrofonių, į juos panašios radijo dažnio (RD) garsinių grandžių įrangos, belaidės garsinės ir ausyje nešiojamos stebėsenos įrangos specialiosios sąlygos

Language	EN title
Maltese	Kompatibilità elettromanjetika u materji relatati ma' spettru radjofoniku (ERM); Standard ta' Kompatibilità Elettromanjetika (EMC) għal tagħmir u servizzi radjofonici; Parti 9: Kondizzjonijiet speċifiċi għal mikrofonu bla wajer, tagħmir konness bl-awdjo ta' Frekwenza Radjofonika (RF) simili, u apparat bla wajers li jimmonitorja awdjo u konness mal-widna
Norwegian	Elektromagnetisk kompatibilitet og radiospektrumsaker (ERM); Elektromagnetisk kompatibilitet (EMC) standard for radio-utstyr og tjenester; Spesifikke vilkr for trdlse mikrofoner, tilsvarende radiofrekvent audiolinkutstyr, snorlst audio og i ret-monitoreringsutstyr
Polish	Kompatybilność elektromagnetyczna i zagadnienia widma radiowego (ERM) — Norma kompatybilności elektromagnetycznej (EMC) dotycząca urządzeń i systemów radiowych — Część 9: Wymagania szczegółowe dla mikrofonów bezprzewodowych i podobnych urządzeń łączności akustycznej wykorzystujących częstotliwości radiowe (RF)
Portuguese	Assuntos de Espectro Radioelétrico e Compatibilidade Electromagnética (ERM); Norma de Compatibilidade Electromagnética (CEM) para equipamentos de rádio; Parte 9: Condições específicas para microfones sem fios, equipamentos similares de ligação áudio por Rádio-Frequência, equipamentos de áudio sem fios e equipamentos de monitorização auditiva
Romanian	
Slovak	Elektromagnetická kompatibilita a závislosti rádiového spektra (ERM). Elektromagnetická kompatibilita (EMC), norma na rádiové zariadenia a služby. Časť 9: Osobitné podmienky na bezdrôtové mikrofóny, podobné rádiové frekvenčné (RF) zariadenia zvukového spoja a bezšnúrové zvukové a vnútorné monitorovacie prístroje
Slovenian	Elektromagnetna združljivost in zadeve v zvezi z radijskim spektrom (ERM) — Standard elektromagnetne združljivosti (EMC) za radijsko opremo in storitve — 9. del: Posebni pogoji za brezžicne mikrofone, podobno opremo za radiofrekvenčne (RF) zvokovne povezave ter brezžicne avdio in ušesne slušne naprave
Spanish	Cuestiones de compatibilidad electromagnética y de espectro de radiofrecuencia (ERM); Norma de compatibilidad electromagnética (CEM) para equipos y servicios radioeléctricos; Parte 9: Condiciones específicas para micrófonos inalámbricos, equipos de radiofrecuencia (RF) similares para enlaces de audio, dispositivos de audio inalámbricos y dispositivos de monitorización intra-auditivos
Swedish	Elektromagnetisk kompatibilitet och radiospektrumfrågor (ERM); Elektromagnetisk kompatibilitetsstandard (EMC) för radioutrustning och tjänster, Del 9: Specifika villkor för första (CT1 och CT1+) och andra generationens (CT2) sladdlösa telefonutrustningar

Annex D (informative): Bibliography

~~Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).~~

- Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.

~~ETSI EN 301 489 3 (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short Range Devices (SRD) operating on frequencies between 9 kHz and 40 GHz".~~

Annex E (informative): Change History

<u>Version</u>	<u>Information about changes</u>
<u>2.1.0</u>	<u>Changes and amendments according to the essential requirements of the RE-D. More information regarding the changes between the different versions of the present document may be found in ETSI EN 301 489-1 [1]</u>
<u>2.1.1</u>	<u>Correction of circular and generic references and annex A according to the EC RE-D Desk officer</u>

History

Document history		
V1.1.1	September 2000	Publication
V1.2.1	November 2001	Publication
V1.3.1	August 2002	Publication
V1.4.1	November 2007	Publication
V2.1.0	September 2016	EN Approval Procedure AP 20161212: 2016-09-13 to 2016-12-12
V2.1.1	March 2017	Vote V 20170507: 2017-03-08 to 2017-05-08
V2.1.1	April 2019	Publication